
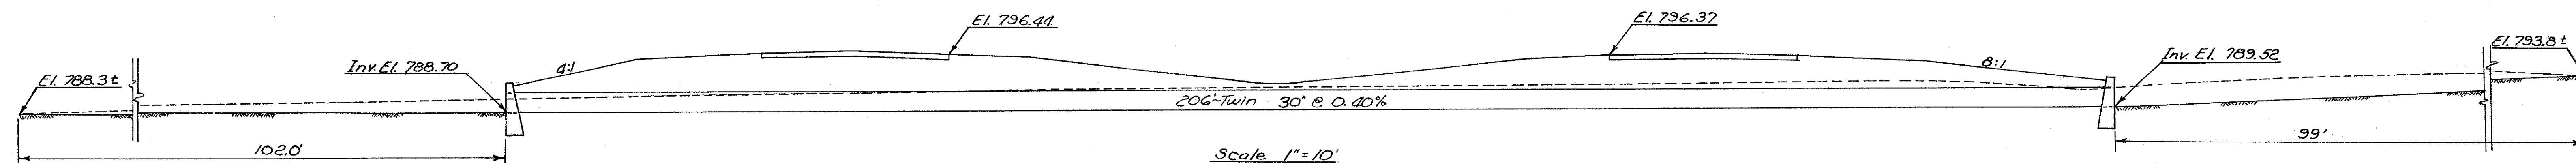


LAKE COUNTY
LAK-1-26.51
ASHTABULA COUNTY
ATB-1-0.00

ESTIMATED QUANTITIES

Item	Description	Quantity	Unit
E-2	Excavation for Structure	290	Cu. Yds.
E-3	Channel Excavation	210	Cu. Yds.
L-10	Sodding	178	Sq. Yds.
S-1	Concrete for Structures Class "C"	18.8	Cu. Yds.
S-4	Reinforcing Steel	842	Lbs.
S-27	30" Standard Strength Reinforced Concrete Culvert Pipe, Sec. M-6.6 (b) Or Extra Strength Vitrified Sewer Pipe Sec. M-6.8 (b)	412	Lin. Ft.

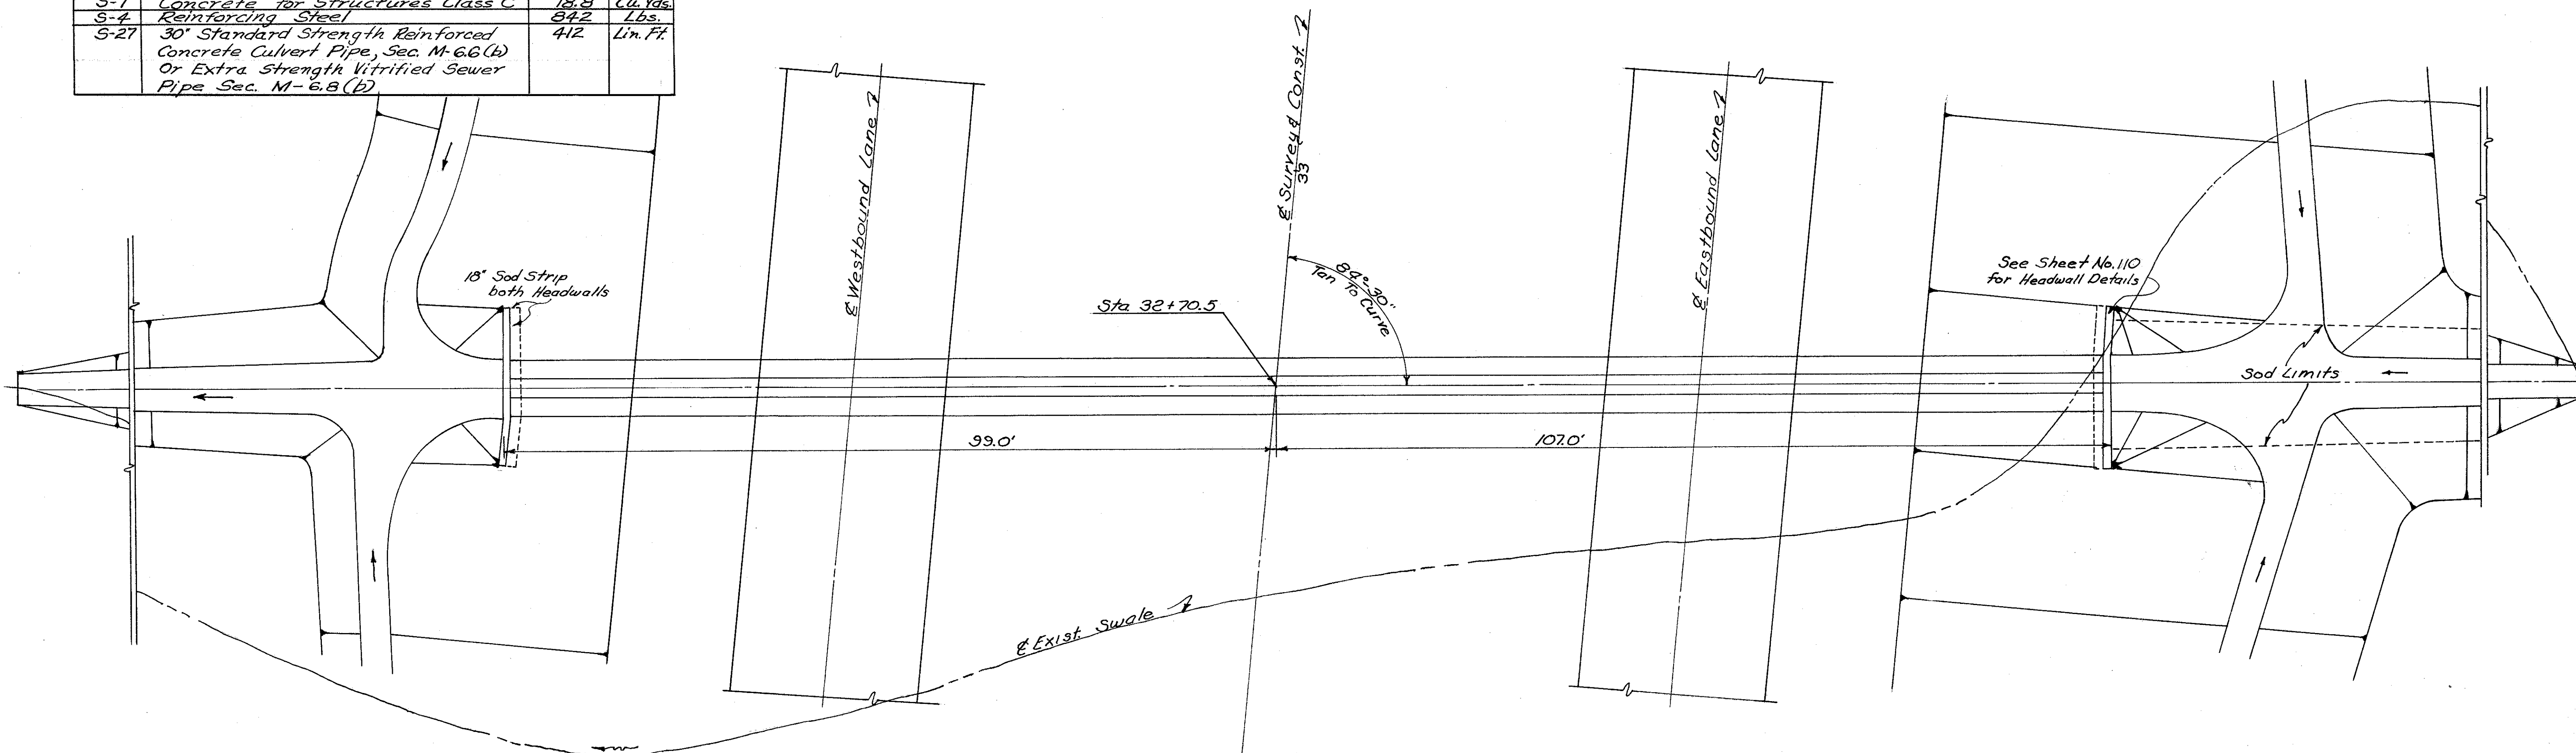

D.A. = 22 Ac.
Q₅₀ = 49 cfs

STRUCTURE No. 5
Station 32+70.5 Lake