

ESTIMATED QUANTITIES



Item	Description	Quantity	Unit
C-2	Excavation for Structures	303	Cu. Yd.
C-3	Channel Excavation	122	Cu. Yd.
T-10	Dumped Rock Channel Protection	278	Cu. Yd.
L-10	Sodding	112	Sq. Yd.
S-1*	Concrete for Structures, Class "C"	0.62	Cu. Yd.
S-1	Concrete for Structures, Class "C"	12.8	Cu. Yd.
S-4	Reinforcing Steel	360	Lbs.
S-27	30" Extra Strength Vitrified Sewer Pipe, Sec. M-6B(b) or Standard Strength Reinforced Concrete Culvert Pipe, Sec. M6.6(b)	346	Lin. Ft.

* Concrete for Endsill as per Plan


FED. RD. DIVISION	STATE	PROJECT
2	OHIO	I-110.3 (15)

30
176

LAKE COUNTY
LAK-1-26.51
ASHTABULA COUNTY
ATB-1-0.00

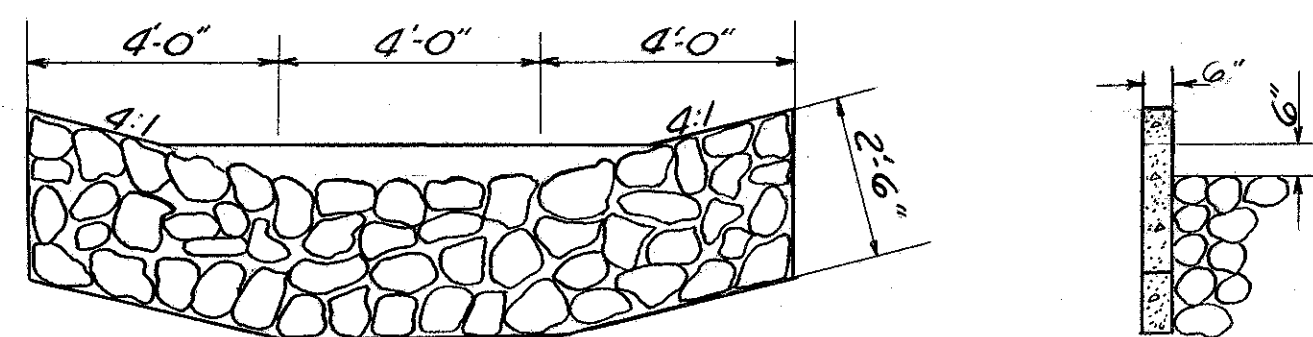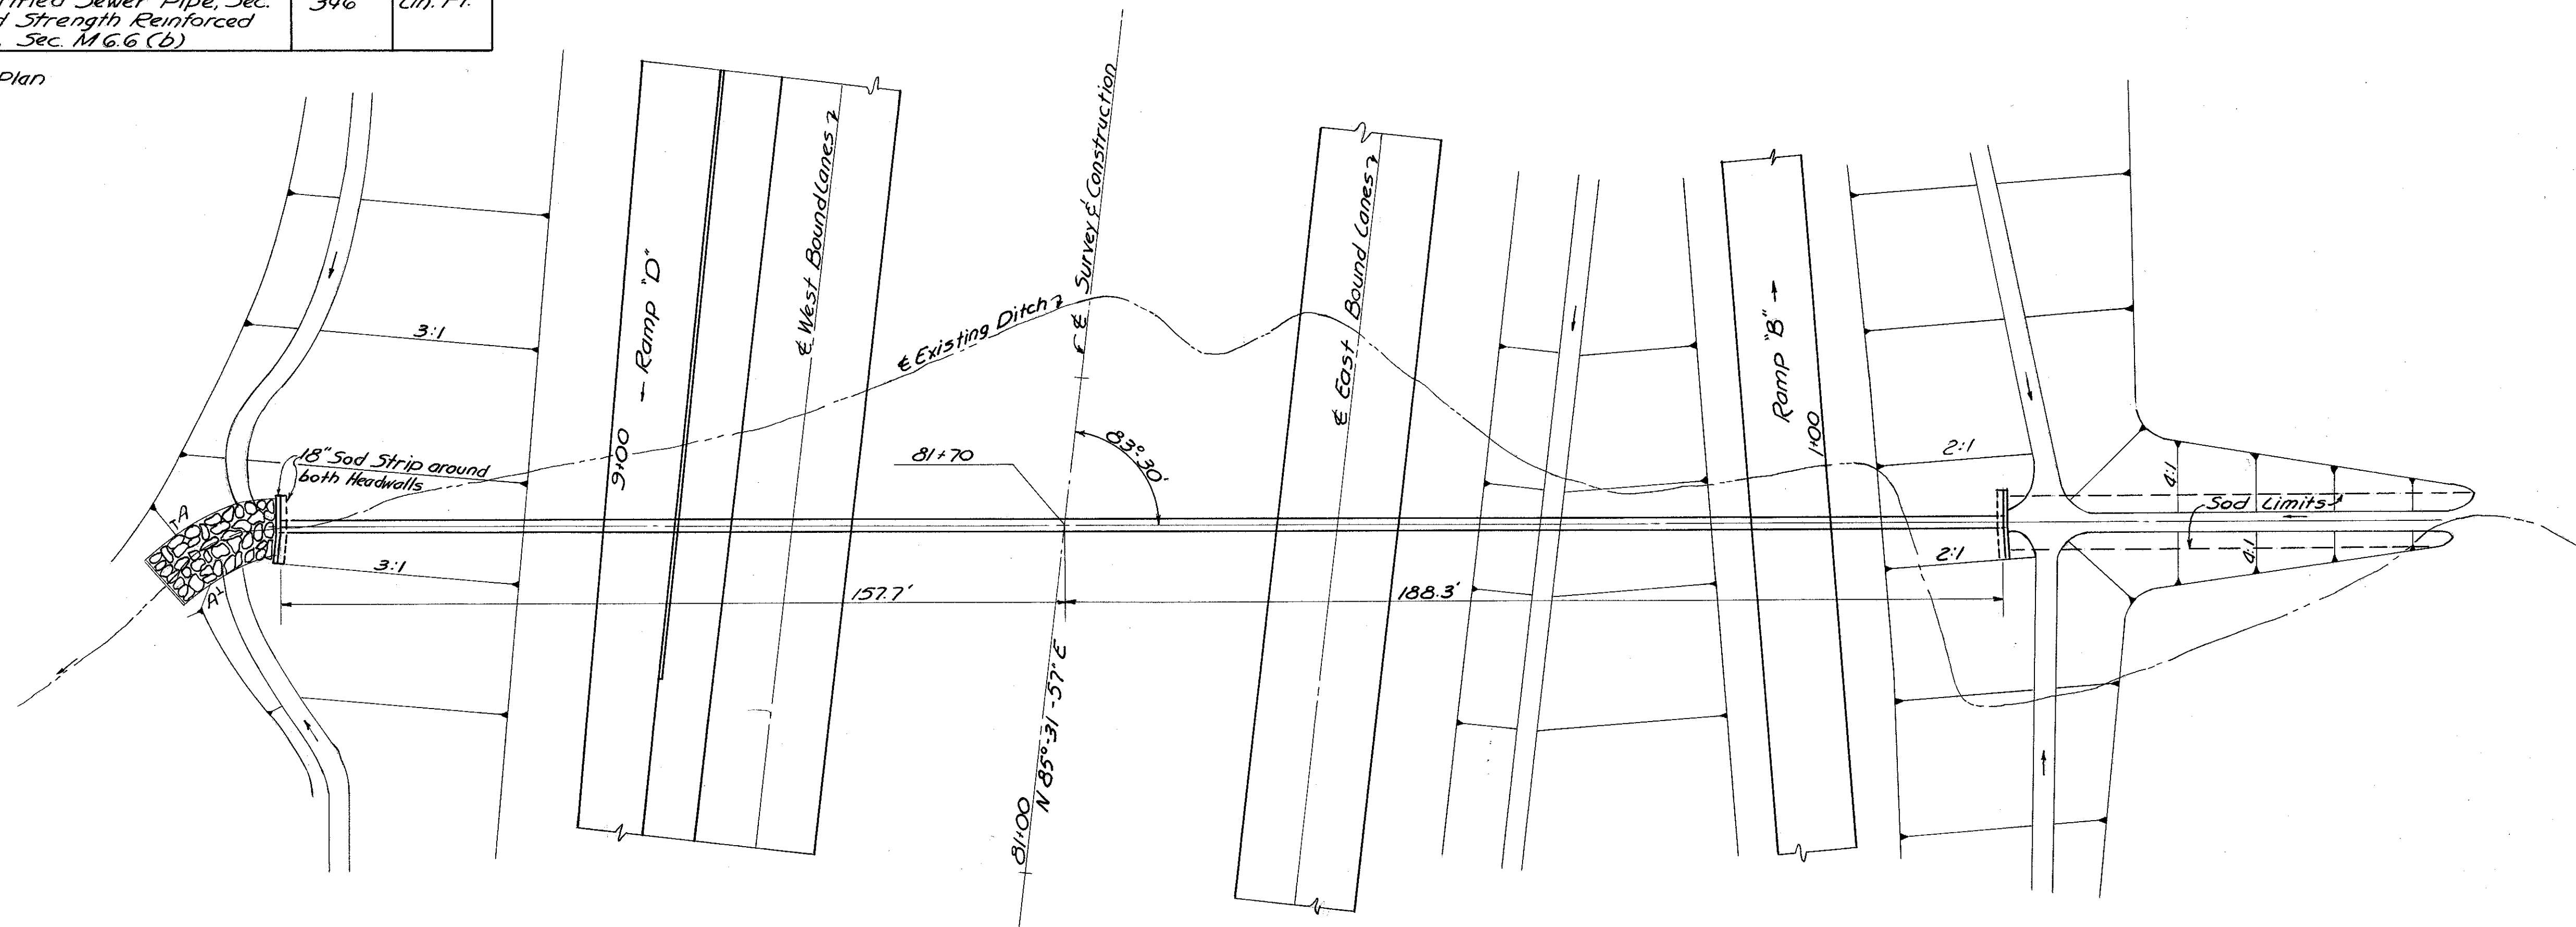

Scale 1" = 20'

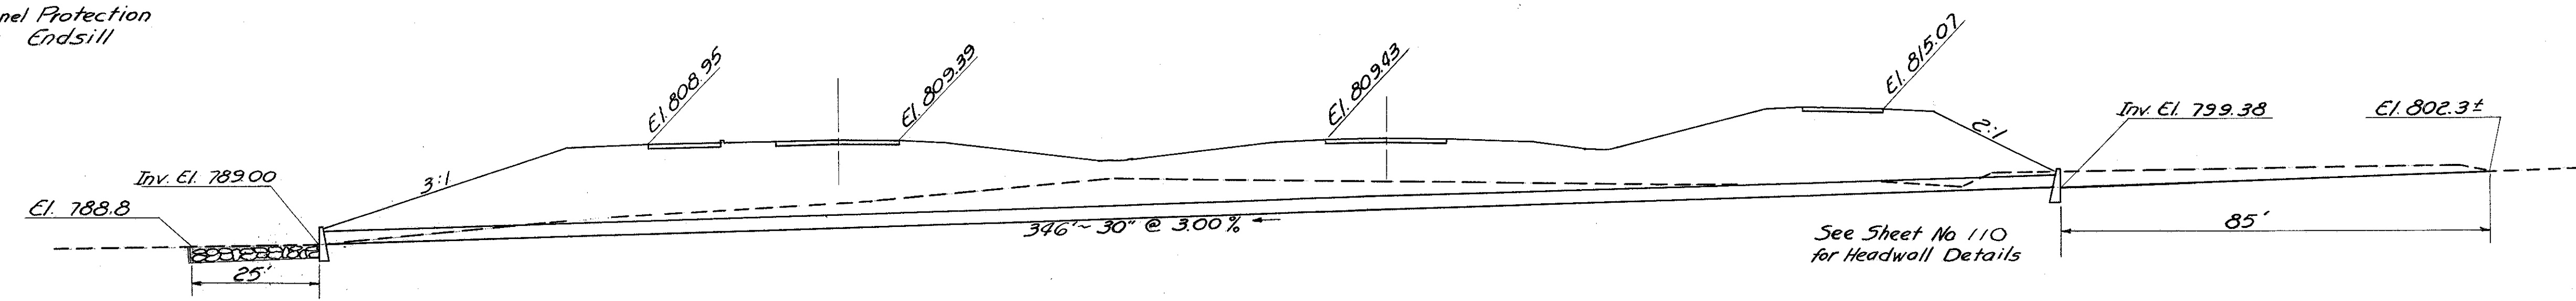

DA = 28 Ac.
Q₅₀ 46 cfs.

STRUCTURE NO. 13
STA. 81+70 (Lak)