



ESTIMATED QUANTITIES

Item	Description	Quantity	Unit
E-2	Excavation for Structures	220	Cu. Yds.
E-3	Channel Excavation	31	Cu. Yds.
I-10	Riprap Type "A"	55	Sq. Yds.
L-10	Sodding	17	Sq. Yds.
S-1	Concrete for Structures Class "C"	210	Cu. Yds.
S-4	Reinforcing Steel	660	Lbs.
S-27	53"x34" Reinforced Elliptical Concrete Culvert Pipe Sec. M-206.6(b)	212	Lin. Ft.


FED. RD. DIVISION	STATE	PROJECT
2	OHIO	I-1103(15)

95
176

LAKE COUNTY
LAK-1-26.51
ASHTABULA COUNTY
ATB-1-0.00

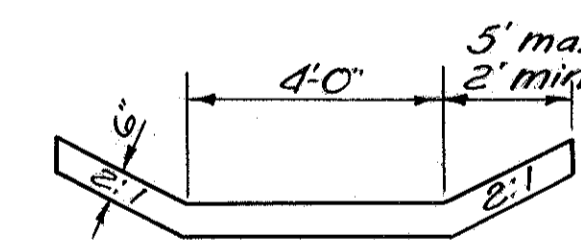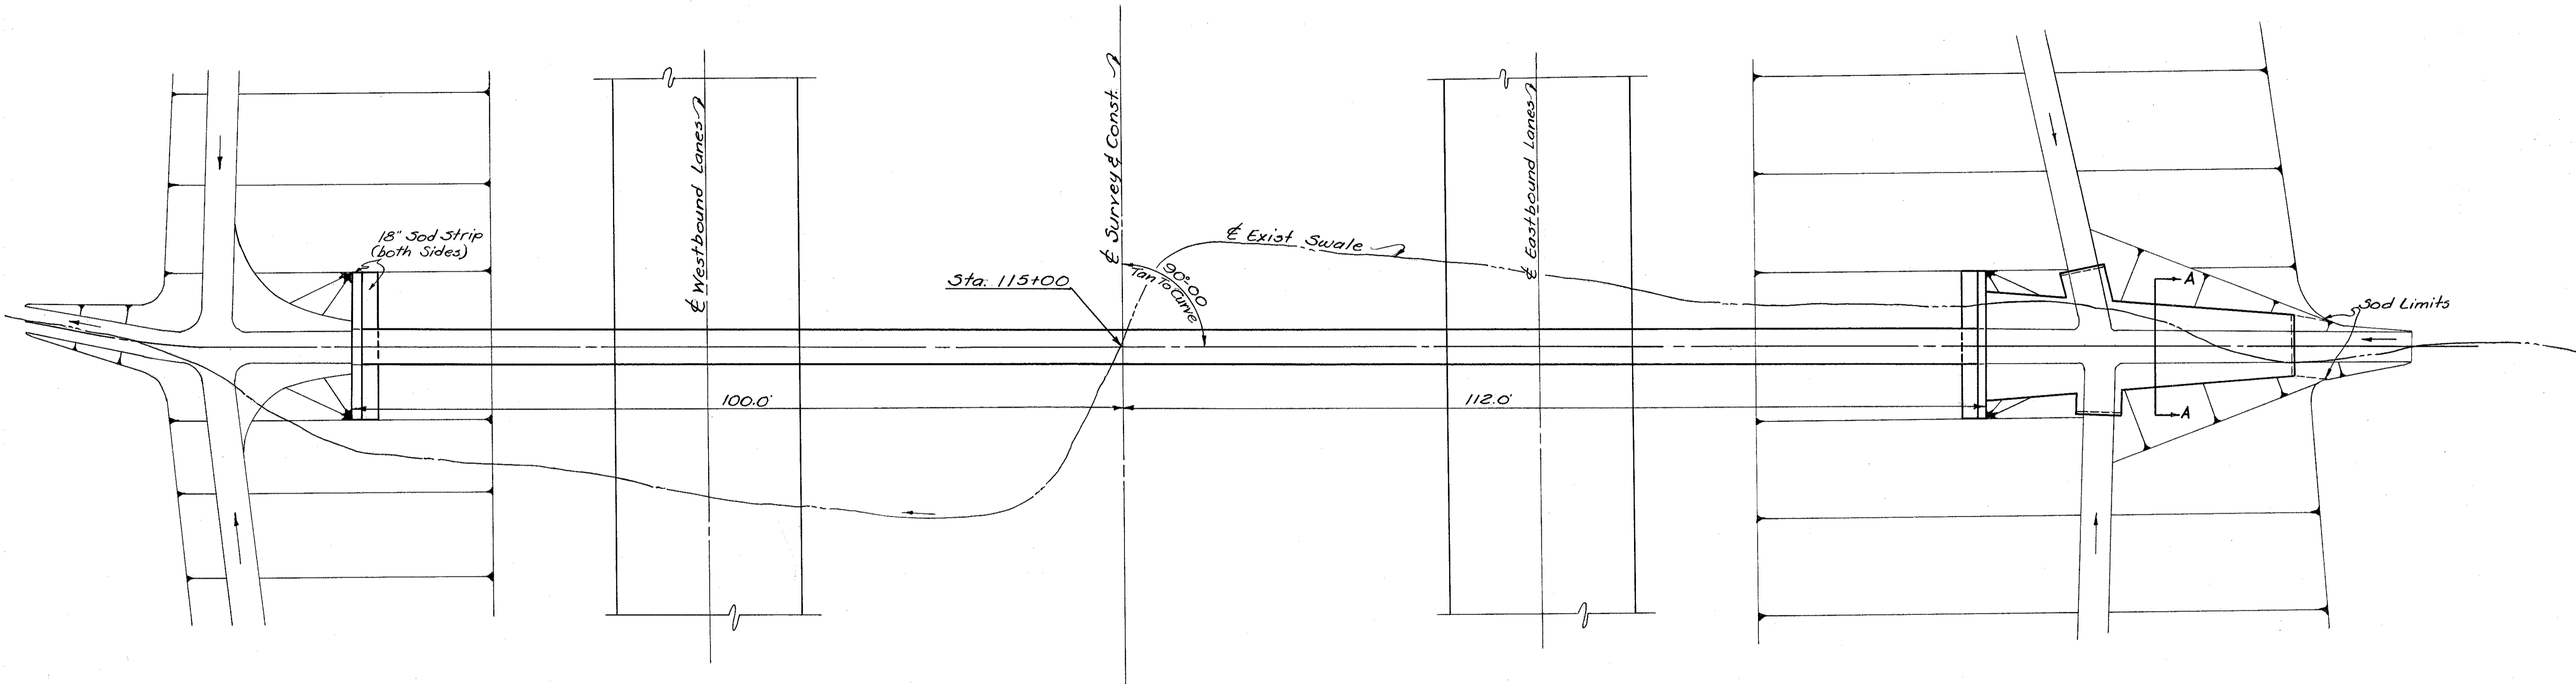

SECTION A-A

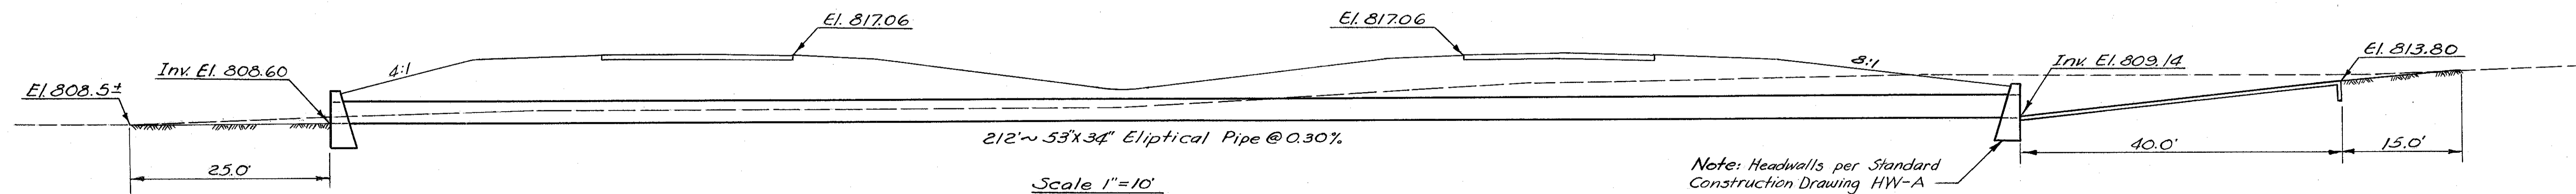

D. A. = 16 Ac.
Q₅₀ = 48 c.f.s.

STRUCTURE NO. 18
Station 115+00 (Lake)