


ESTIMATED QUANTITIES

Item	Description	Quantity	Unit
E-2	Excavation for Structures	116	Cu. Yd.
E-3	Channel Excavation	30	Cu. Yd.
I-10	Dumped Rock Channel Protection	21	Cu. Yd.
I-10	Riprap Type "A" (As per Plan)	53	Sq. Yd.
S-1	Concrete for Structures, Class "C"	40.8	Cu. Yd.
S-4	Reinforcing Steel	1824	Lbs.
S-27	60" Standard Strength Reinforced Concrete Culvert Pipe Sec. M.G.G.(b) or S-28 60" 10-10 Gage Sectional Corrugated Metal Pipe Sec. M.G.G.(g)	208	Lin. Ft.
L-10	Sodding	11	Sq. Yd.

FED. RD. DIVISION	STATE	PROJECT
2	OHIO	I-1103 (15)

102
176

LAKE COUNTY
LAK-1-26.51
ASHTABULA COUNTY
ATB-1-0.00

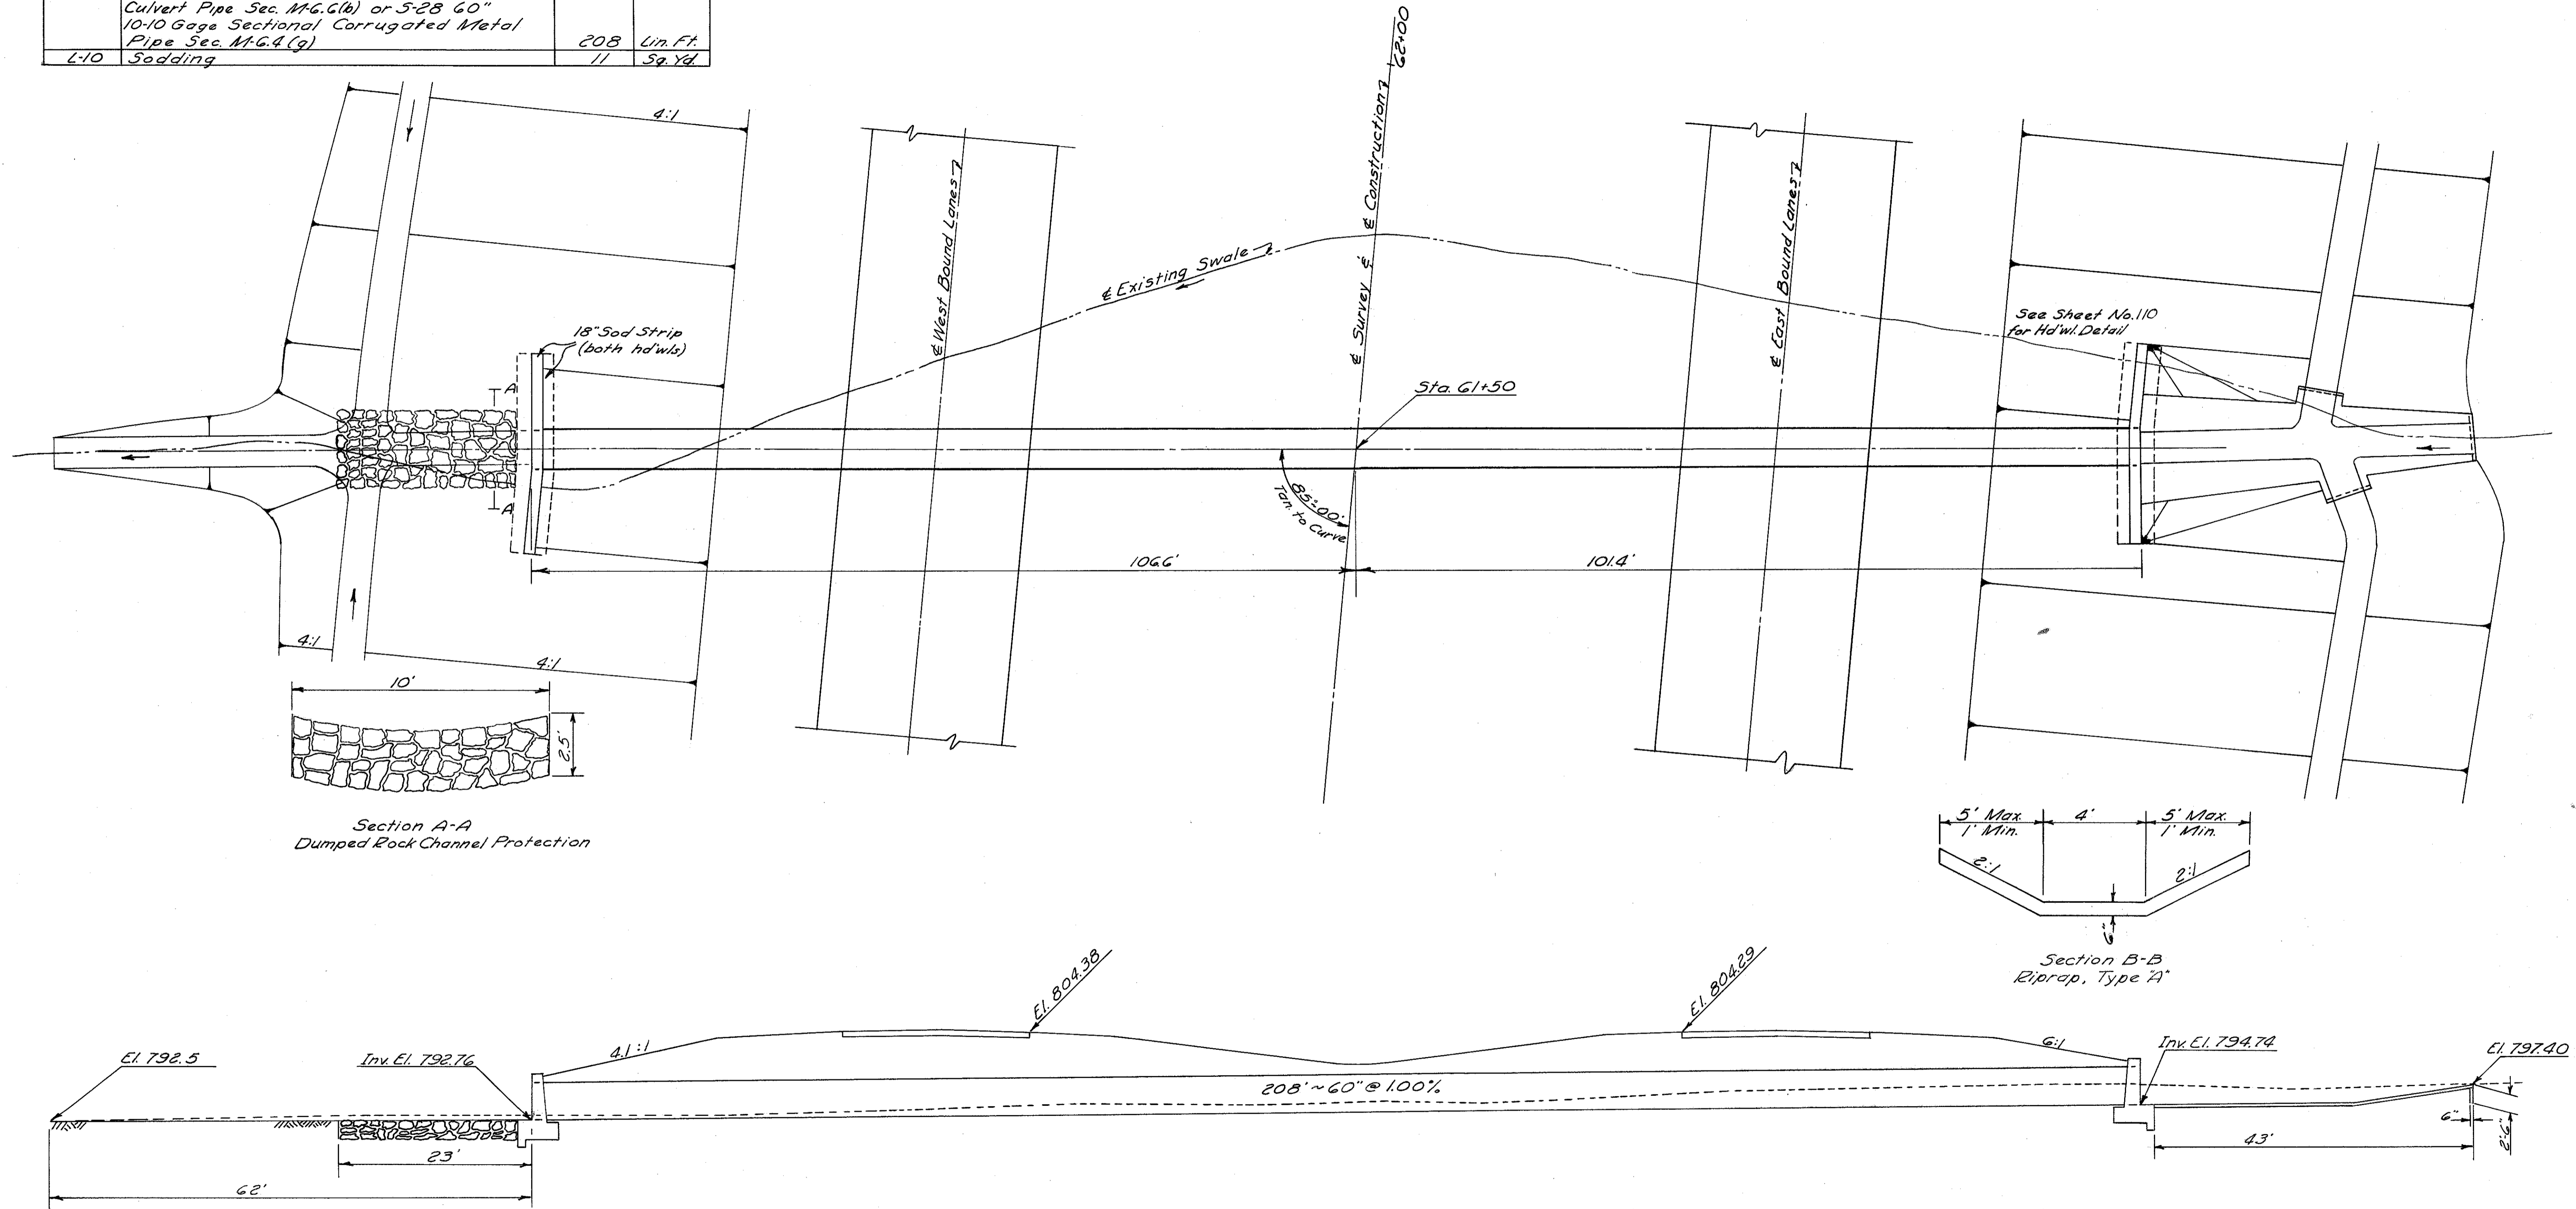

D.A. = 79 Ac.
Q₅₀ = 114 c.f.s.

STRUCTURE No. 26
Station 61+50 (ATB)