




ESTIMATED QUANTITIES

Item	Description	Quantity	Unit
E-2	Excavation for Structures	49	Cu. Yd.
E-3	Channel Excavation	9	Cu. Yd.
S-1	Concrete for Structures, Class "C"	14.6	Cu. Yd.
S-4	Reinforcing Steel	632	Lbs.
S-27	30" Extra Strength Vitrified Sewer Pipe, Sec. M-G. B(b) or Standard Strength Reinforced Concrete Culvert Pipe, Sec. M-G. G(b).	202	Lin. Ft.
I-10	Dumped Rock Channel Protection	13.9	Cu. Yd.
L-10	Sodding	32	Sq. Yds.

FED. RD. DIVISION	STATE	PROJECT
2	OHIO	I-1103(15)

106
176

LAKE COUNTY
LAK-1-26.51
ASHTABULA COUNTY
ATB-1-0.00

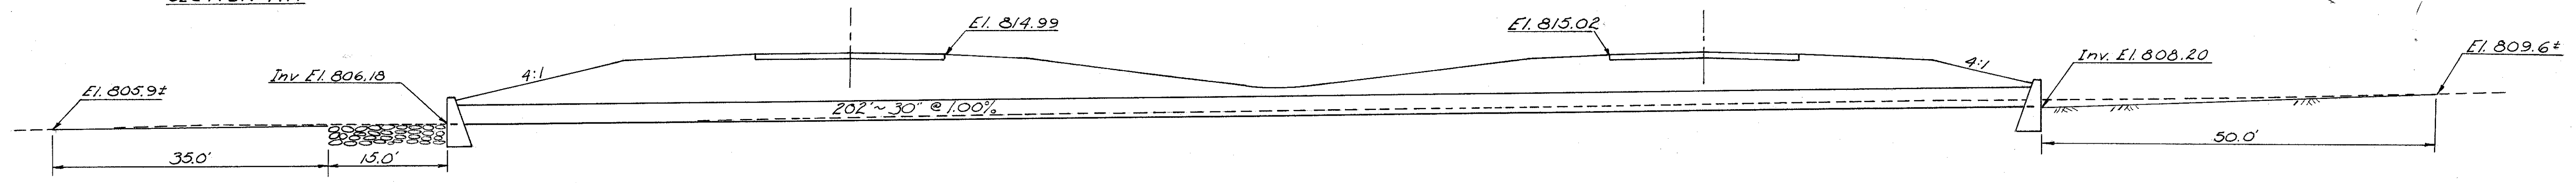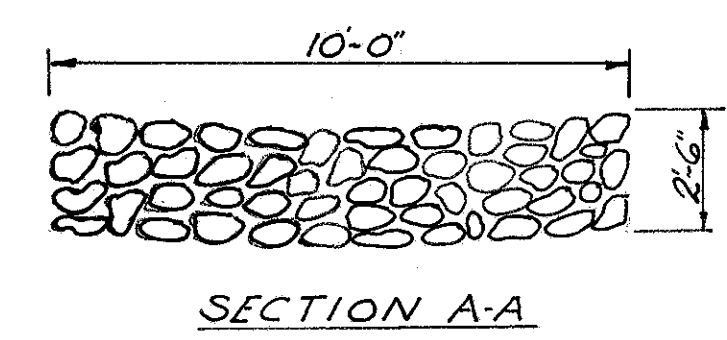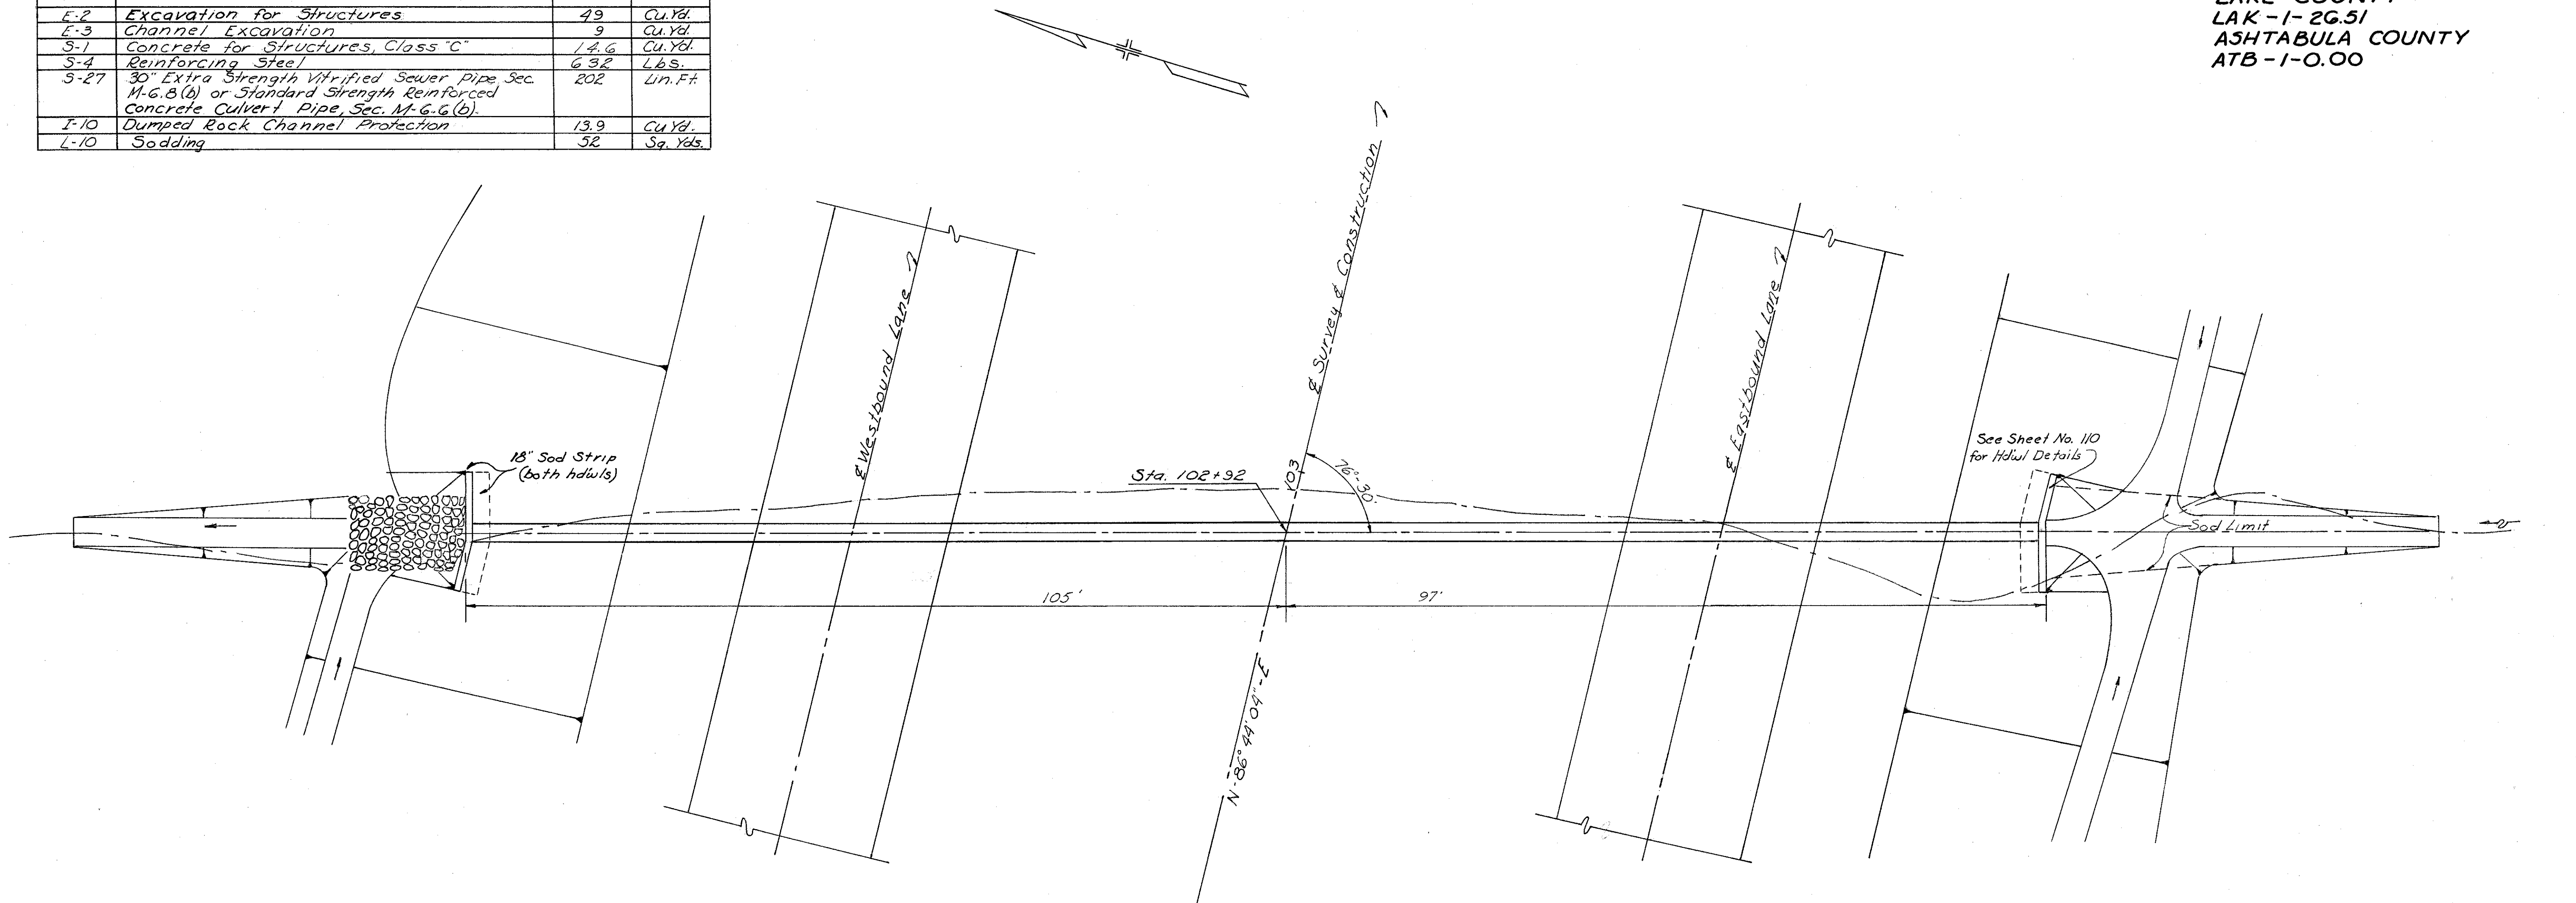

Scale 1"=10'

D.A. = 18 Ac
Q₅₀ = 33 cfs.

STRUCTURE NO. 33
STA 102+92 ATB