


5-29-72  
 EPH  
 3-16-72  
 LJD  
 4-10-72  
 REM

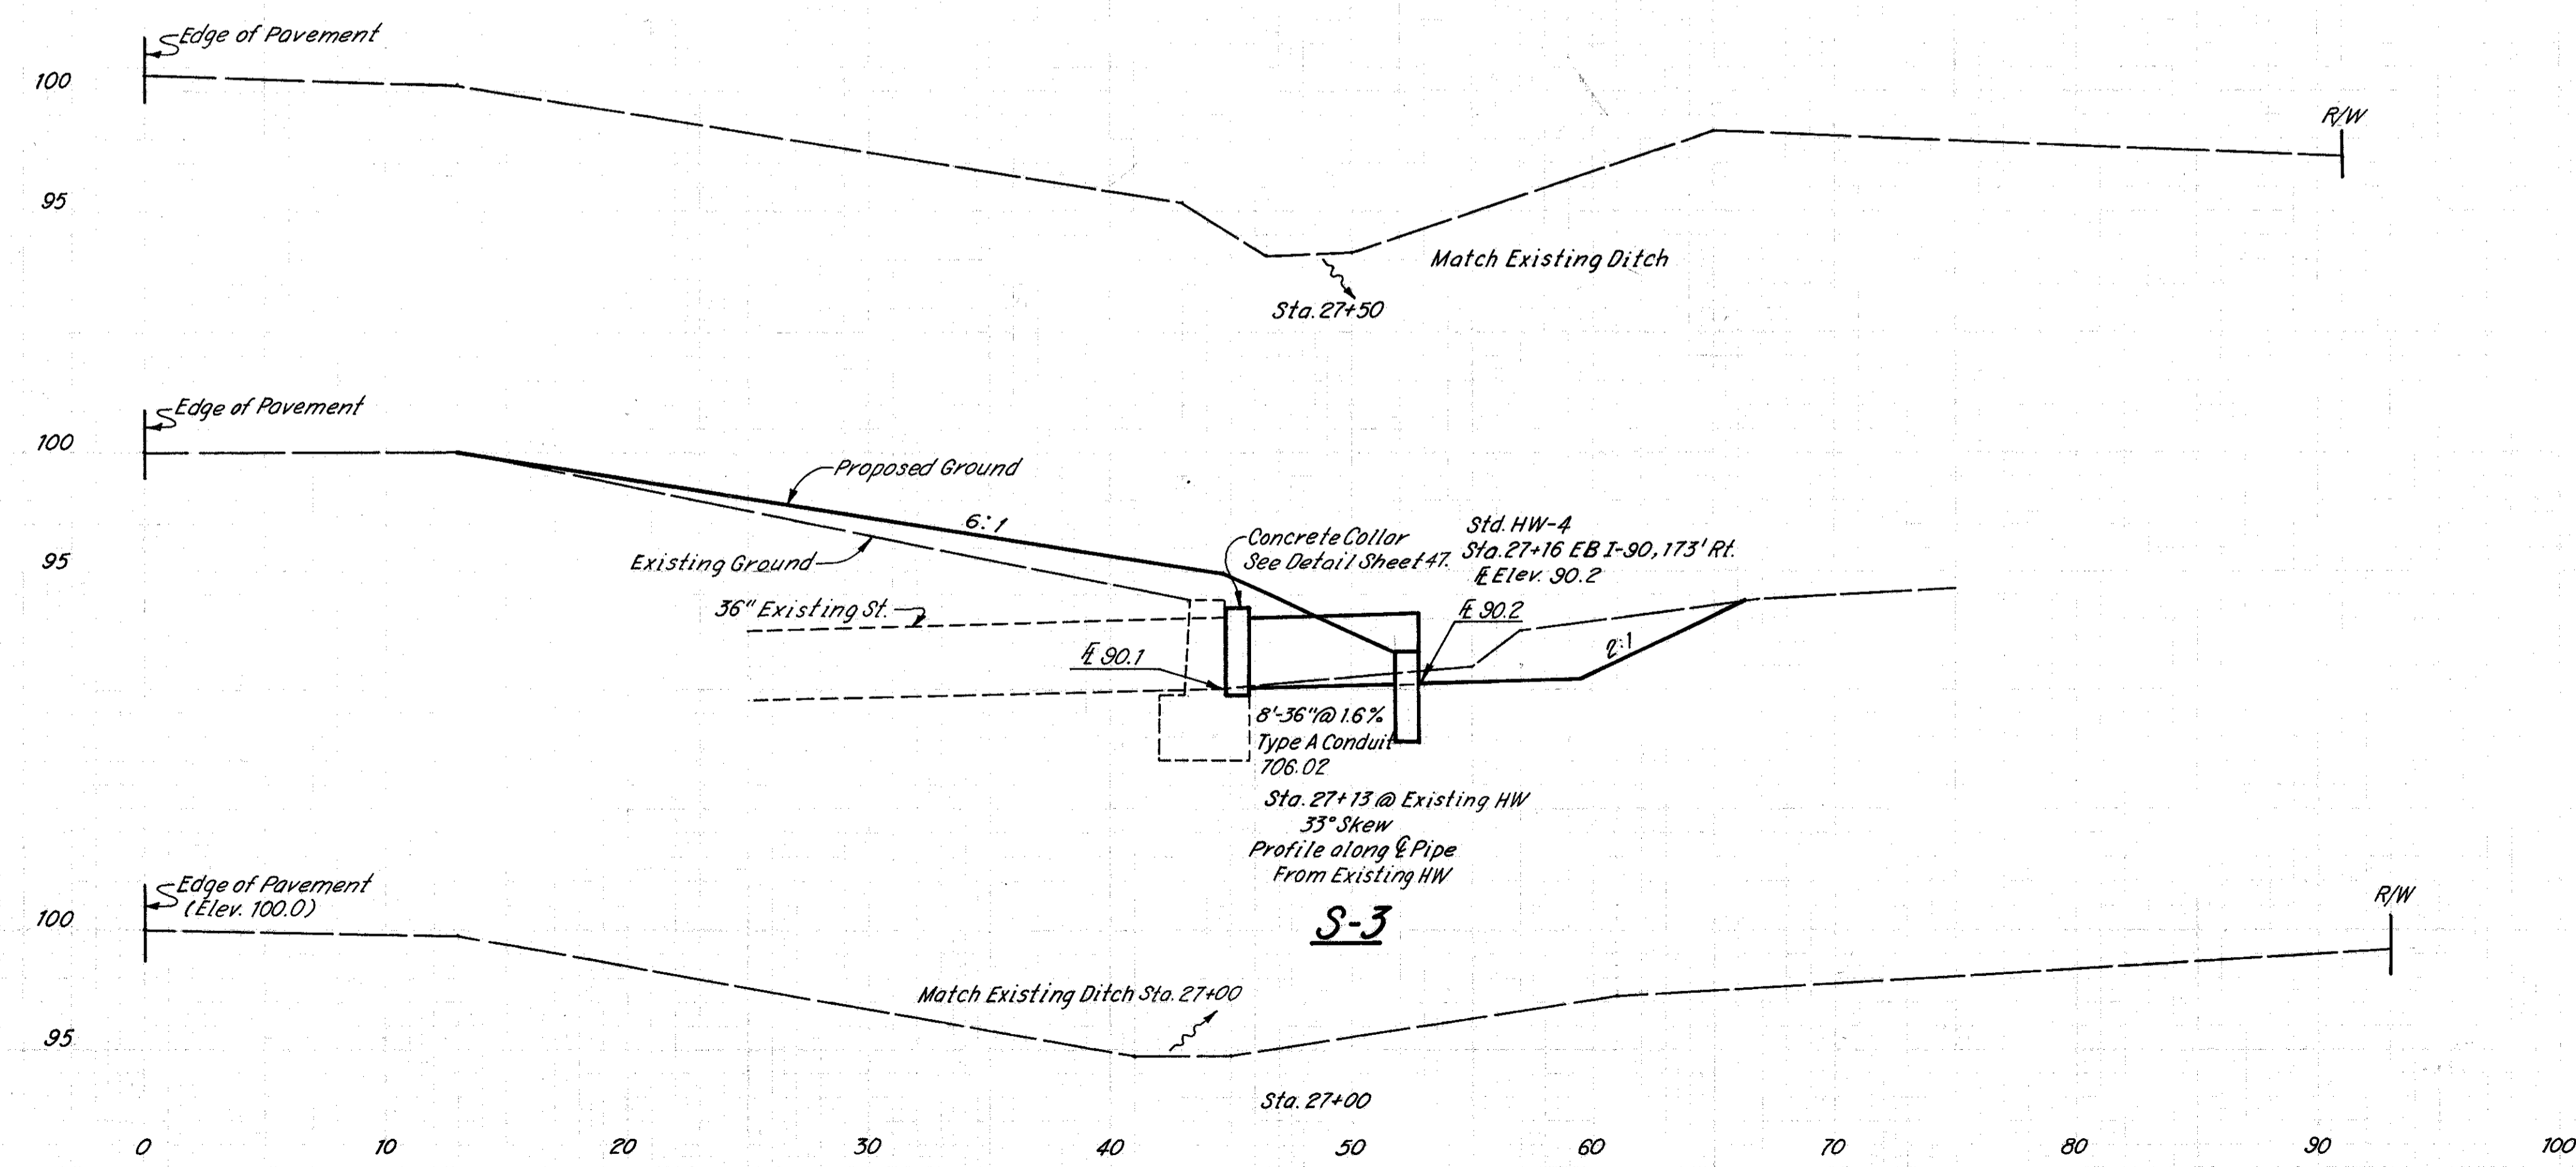

ESTIMATED QUANTITIES S-2

ITEM	DESCRIPTION	QUANTITY	UNIT
202	Gutter Removed	52	Lin. Ft.
203	Excavation	53	Cu. Yds.
203	Embankment	108	Cu. Yds.
601	6" Rein. Concrete Riprap	24	Sq. Yds.
602	Concrete Masonry	1.01	Cu. Yds.
603	48" Conduit Type A 706.02 As per plan	16	Lin. Ft.
603	8" Conduit Type F	48	Lin. Ft.
659	Seeding & Mulching	261	Sq. Yds.

(For Plan View See Sheet No. 11)

ESTIMATED QUANTITIES S-3

ITEM	DESCRIPTION	QUANTITY	UNIT
203	Excavation	20	Cu. Yds.
203	Embankment	53	Cu. Yds.
602	Concrete Masonry	0.59	Cu. Yds.
603	36" Conduit Type A 706.02 As per plan	8	Lin. Ft.
659	Seeding & Mulching	157	Sq. Yds.

(For Plan View See Sheet No. 12)