


LAKE COUNTY
LAK.-90-3.56

QUANTITIES
Made: LJD 4-10-72
Ckd: DSM 4-22-72

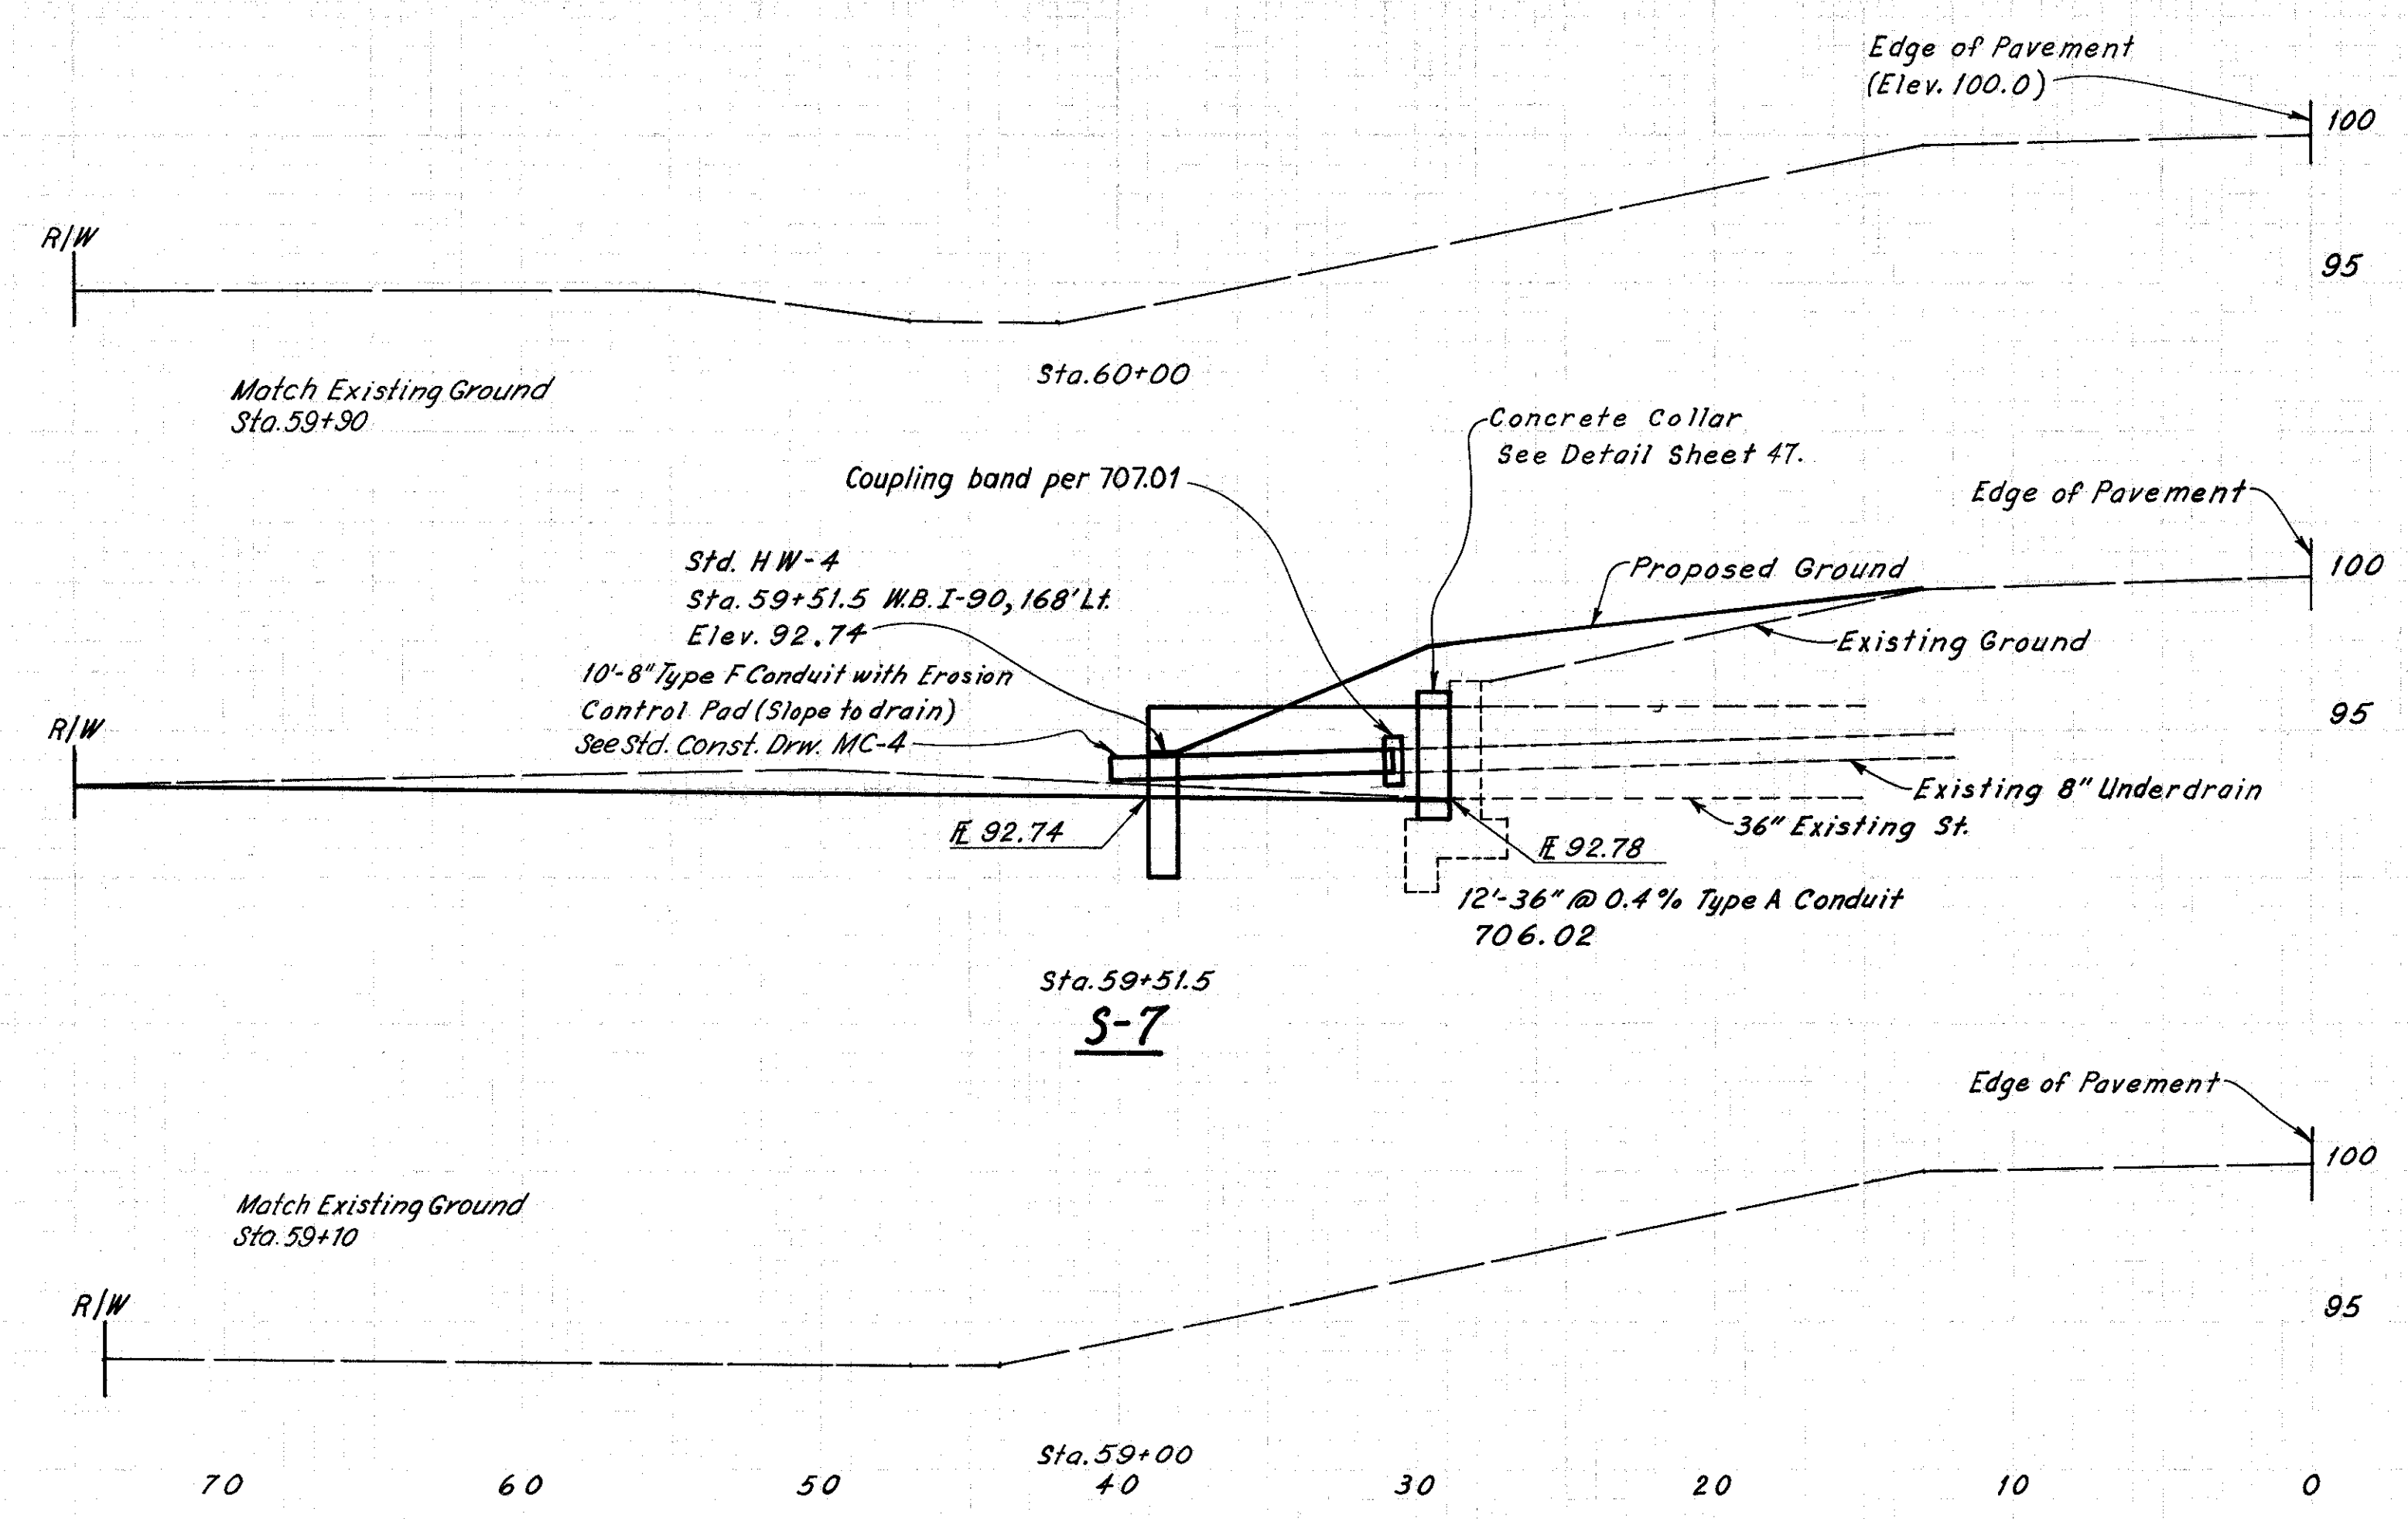

SEEDING & MULCHING
 $\frac{30 \times 80}{9} = 267 \text{ Sq. Yds.}$


EXCAVATION
 $\frac{20 \times 6}{27} = 4 \text{ Cu. Yds.}$

EMBANKMENT
 $\frac{(23+0) \times 80}{54} + \frac{20 \times 17}{27} = 47 \text{ Cu. Yds.}$

ESTIMATED QUANTITIES S-7			
ITEM	DESCRIPTION	QUANTITY	UNIT
203	Excavation	4	Cu. Yds.
203	Embankment	47	Cu. Yds.
602	Concrete Masonry	0.69	Cu. Yds.
603	36" Conduit Type A 706.02 As per plan	12	Lin. Ft.
603	8" Conduit Type F	10	Lin. Ft.
659	Seeding & Mulching	267	Sq. Yds.

(For Plan View See Sheet No. 12)

3-2-72
4-1-72
4-15-72
4-17-72
4-22-72
H.C.
L.A.D.
L.J.D.
D.S.M.

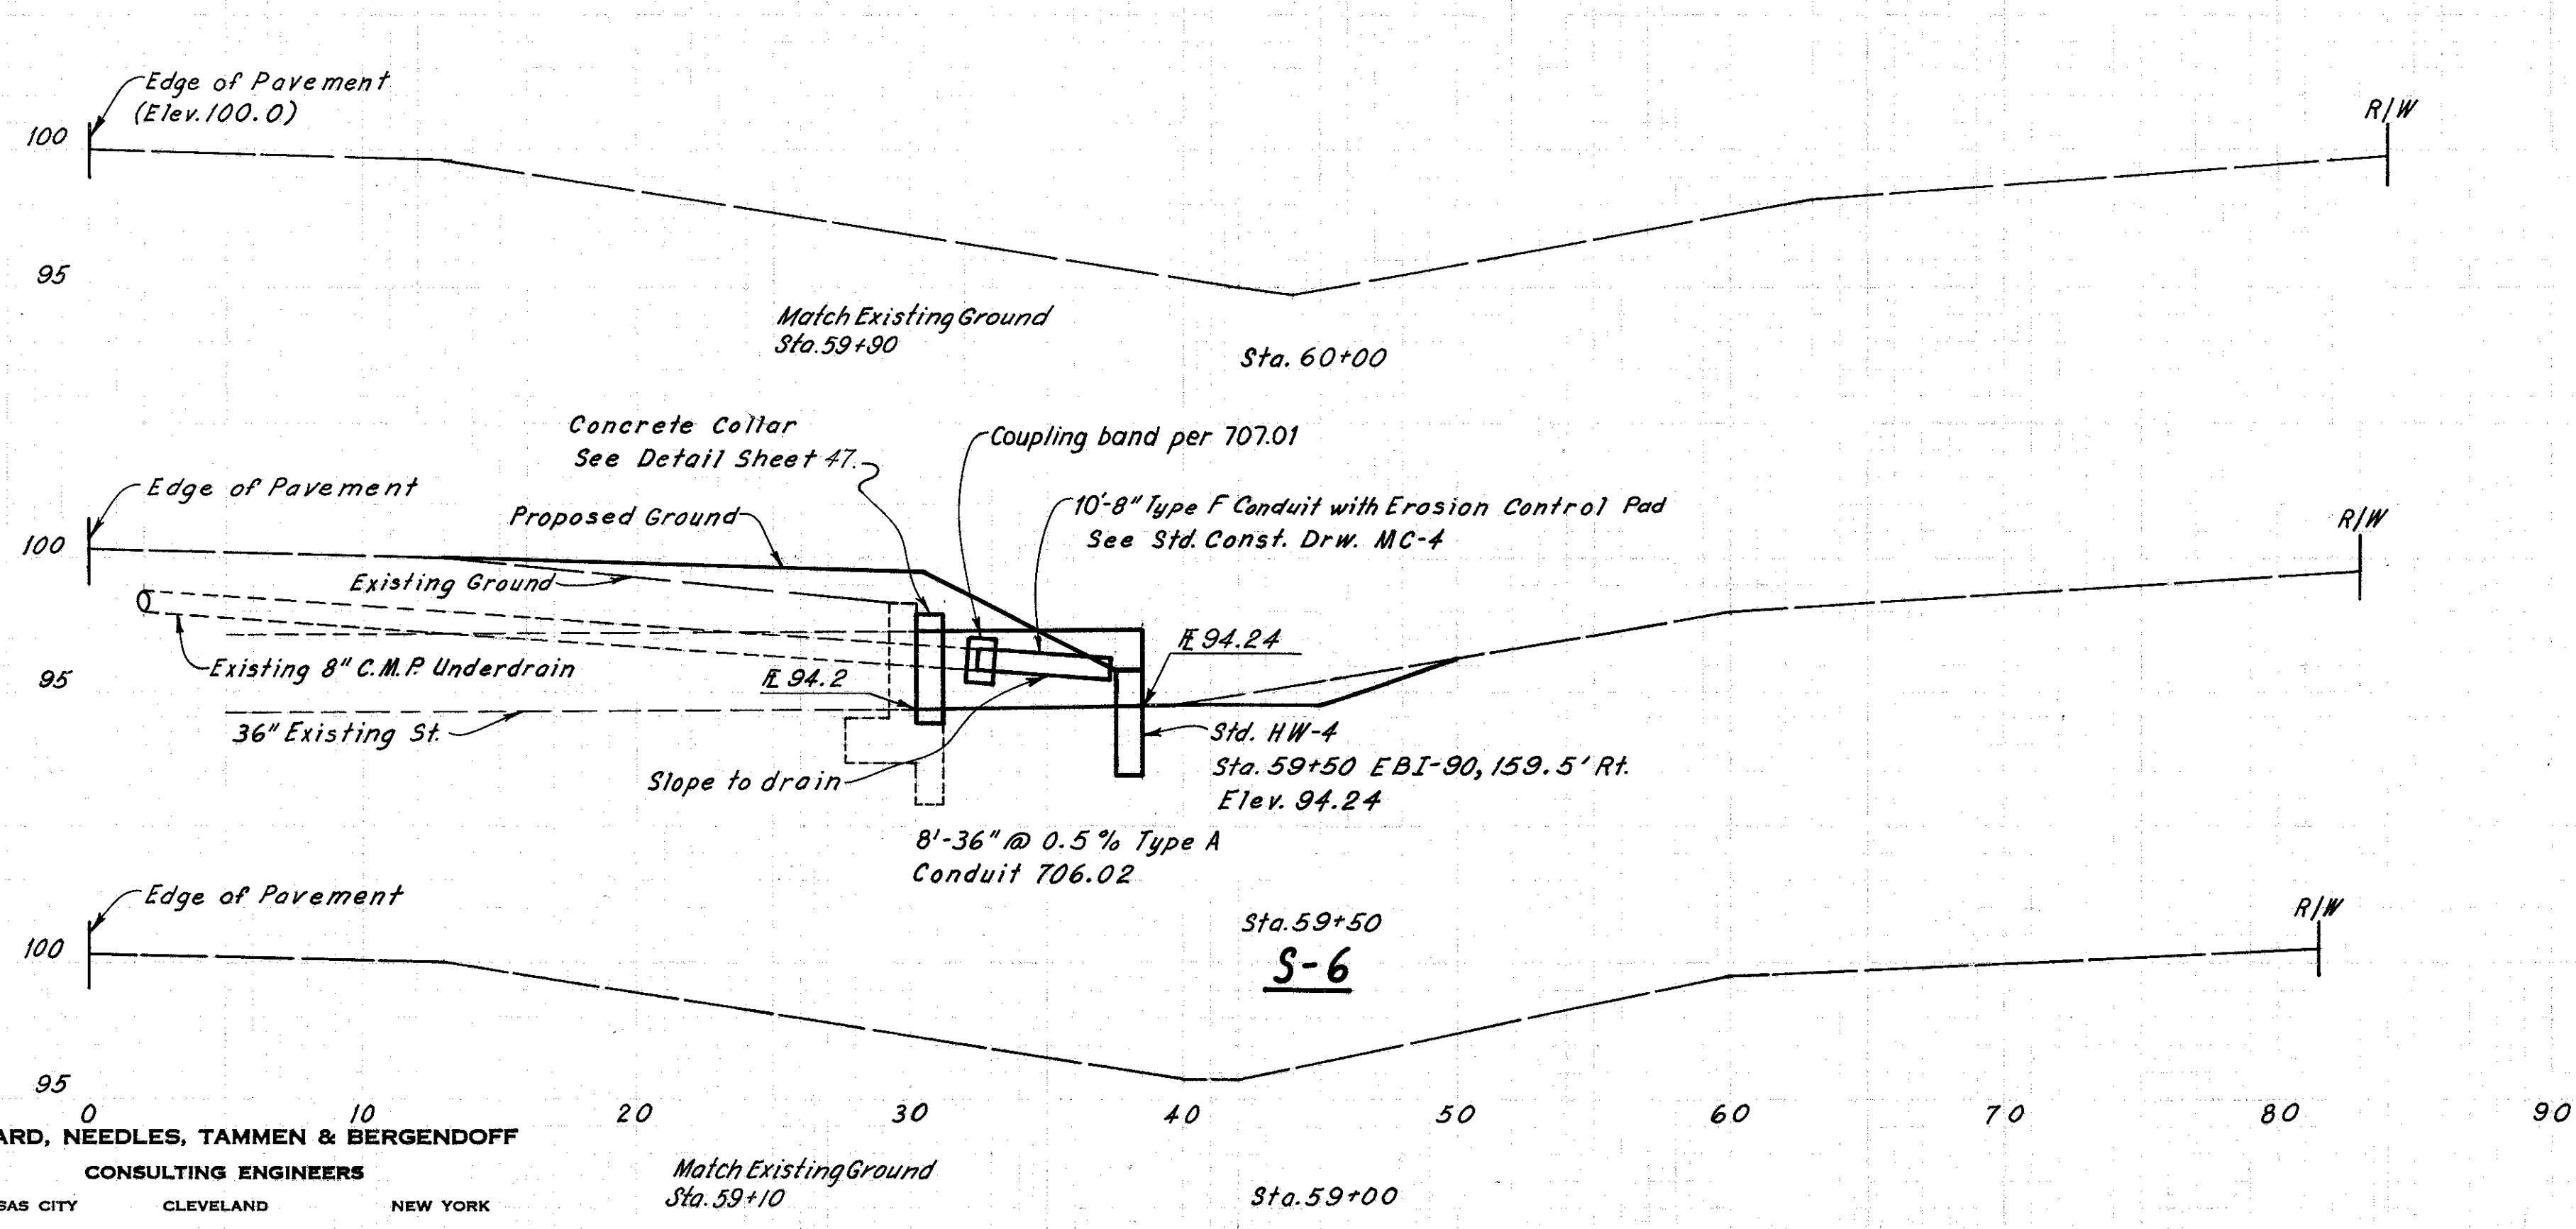

SEEDING & MULCHING
 $\frac{80 \times 40}{9} = 356 \text{ Sq. Yds.}$

EXCAVATION
 $\frac{(5+0) \times 80}{54} = 7 \text{ Cu. Yds.}$

EMBANKMENT
 $\frac{(22+0) \times 80}{54} + \frac{18 \times 17}{27} = 44 \text{ Cu. Yds.}$

ESTIMATED QUANTITIES S-6			
ITEM	DESCRIPTION	QUANTITY	UNIT
203	Excavation	7	Cu. Yds.
203	Embankment	44	Cu. Yds.
602	Concrete Masonry	0.69	Cu. Yds.
603	36" Conduit Type A 706.02 As per plan	8	Lin. Ft.
603	8" Conduit Type F	10	Lin. Ft.
659	Seeding & Mulching	356	Sq. Yds.

(For Plan View See Sheet No. 12)

3-2-72
4-1-72
4-15-72
4-17-72
4-22-72
H.C.
L.A.D.
L.J.D.
D.S.M.