


LAKE COUNTY
LAK.-90-3.56

QUANTITIES
Made: ERH 5-4-72
Ckd: LJD 5-26-72

SEEDING & MULCHING
 $\frac{50 \times 26}{9} = 144 \text{ Sq. Yds.}$

EMBANKMENT
 $\frac{(20+0)50}{54} + \frac{15 \times 14}{27} = 27 \text{ Cu. Yds.}$

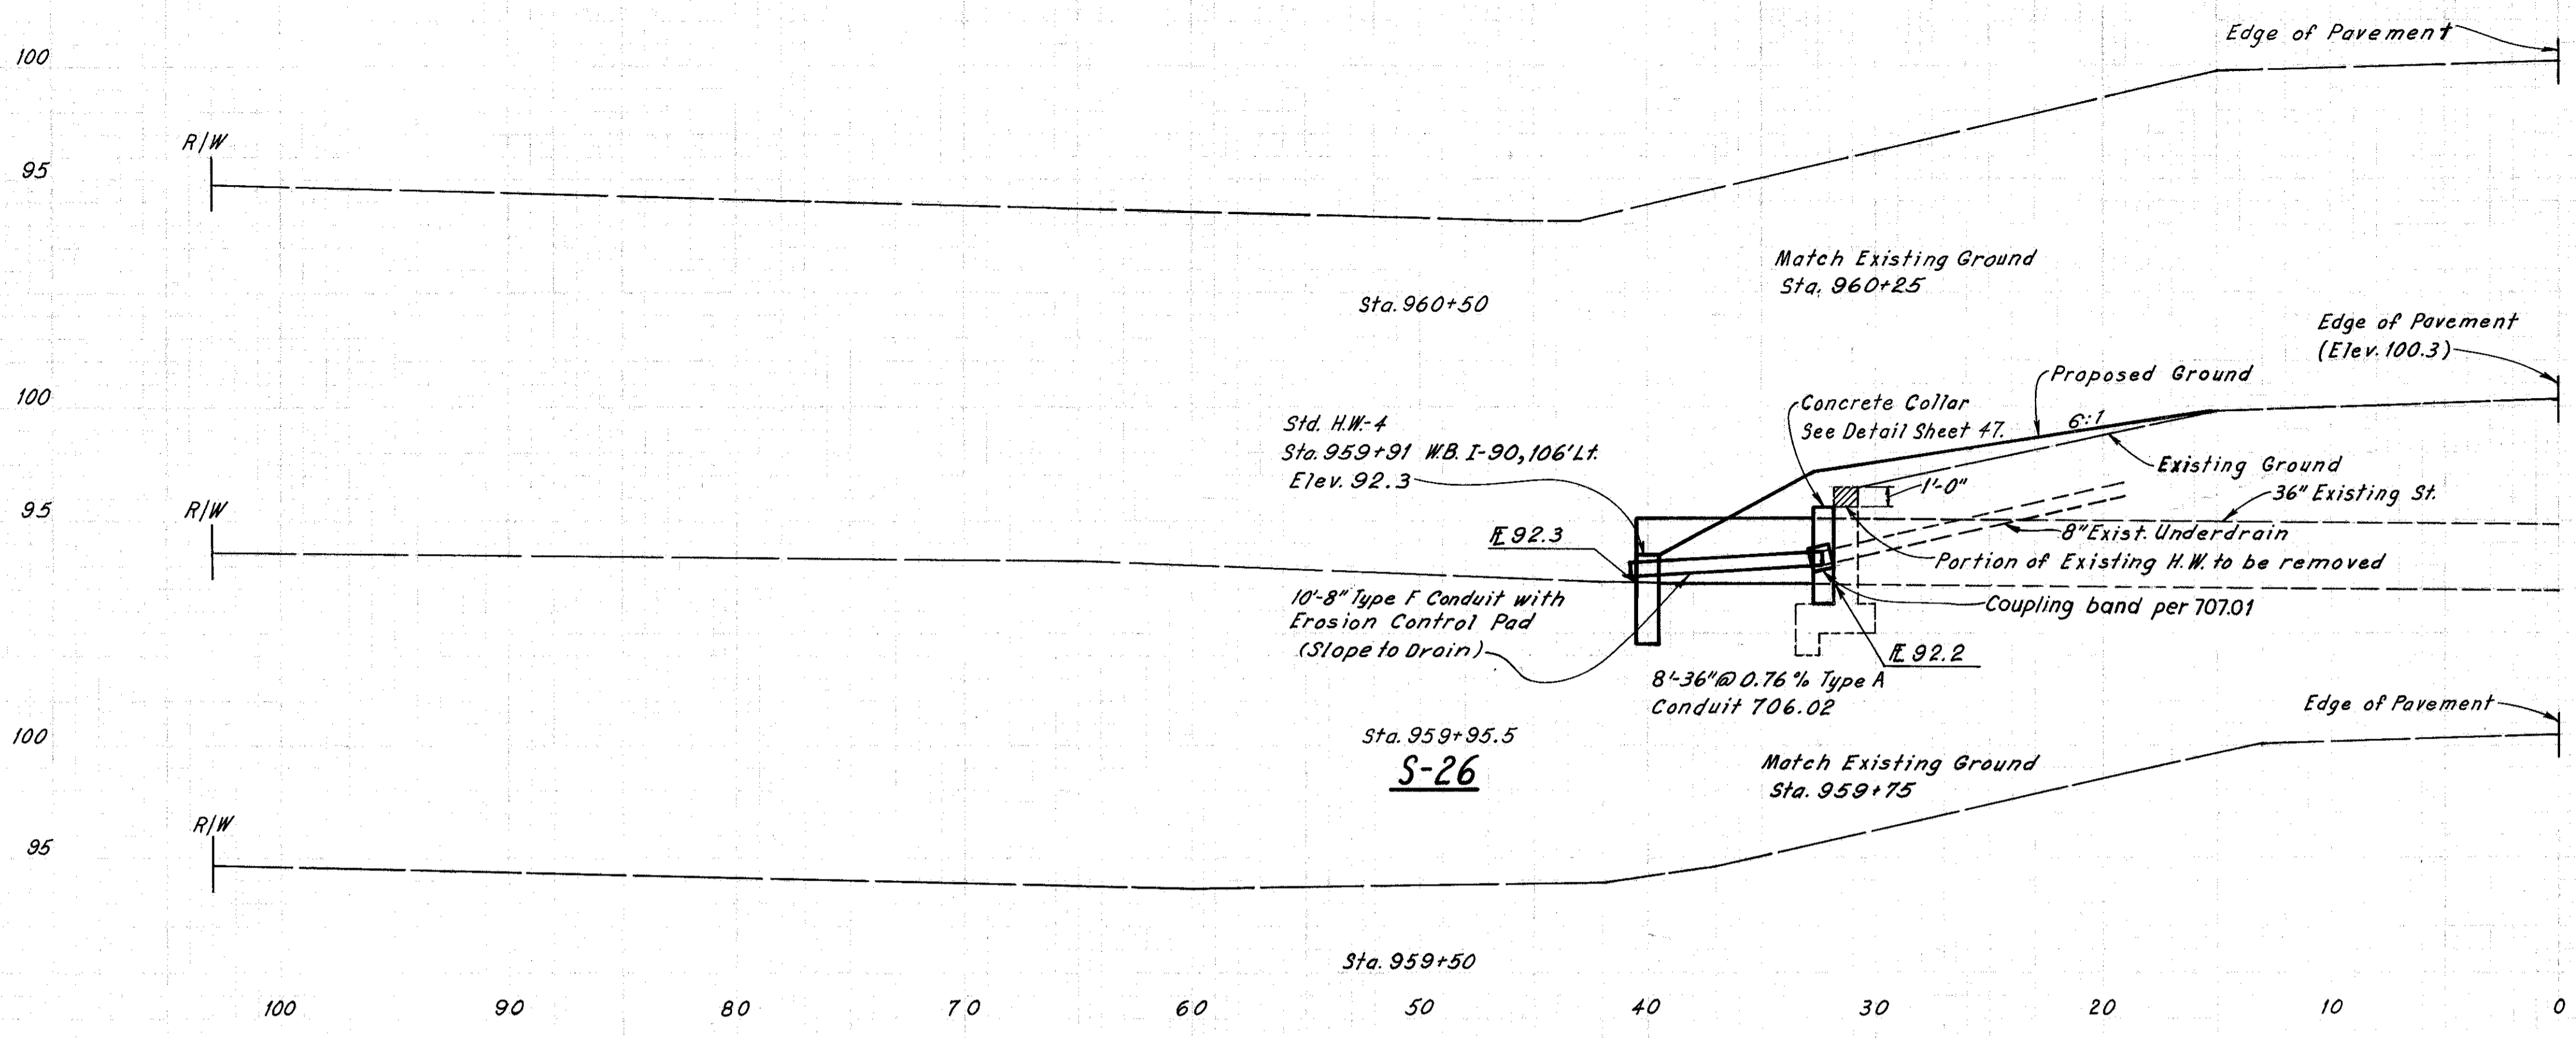


ESTIMATED QUANTITIES S-26

ITEM	DESCRIPTION	QUANTITY	UNIT
202	Portion of Structure Removed	Lump	Lump Sum
203	Embankment	27	Cu. Yds.
602	Concrete Masonry	0.69	Cu. Yds.
603	36" Conduit Type A 706.02 As per plan	8	Lin. Ft.
603	8" Conduit Type F	10	Lin. Ft.
659	Seeding & Mulching	144	Sq. Yds.

(For Plan View See Sheet No. 27)

1-9-72
5-9-72
5-9-72
5-4-72
5-26-72

M.C. TAMM
D.S.M. ESH
D.S.M. ESH
R.A.E. LUD

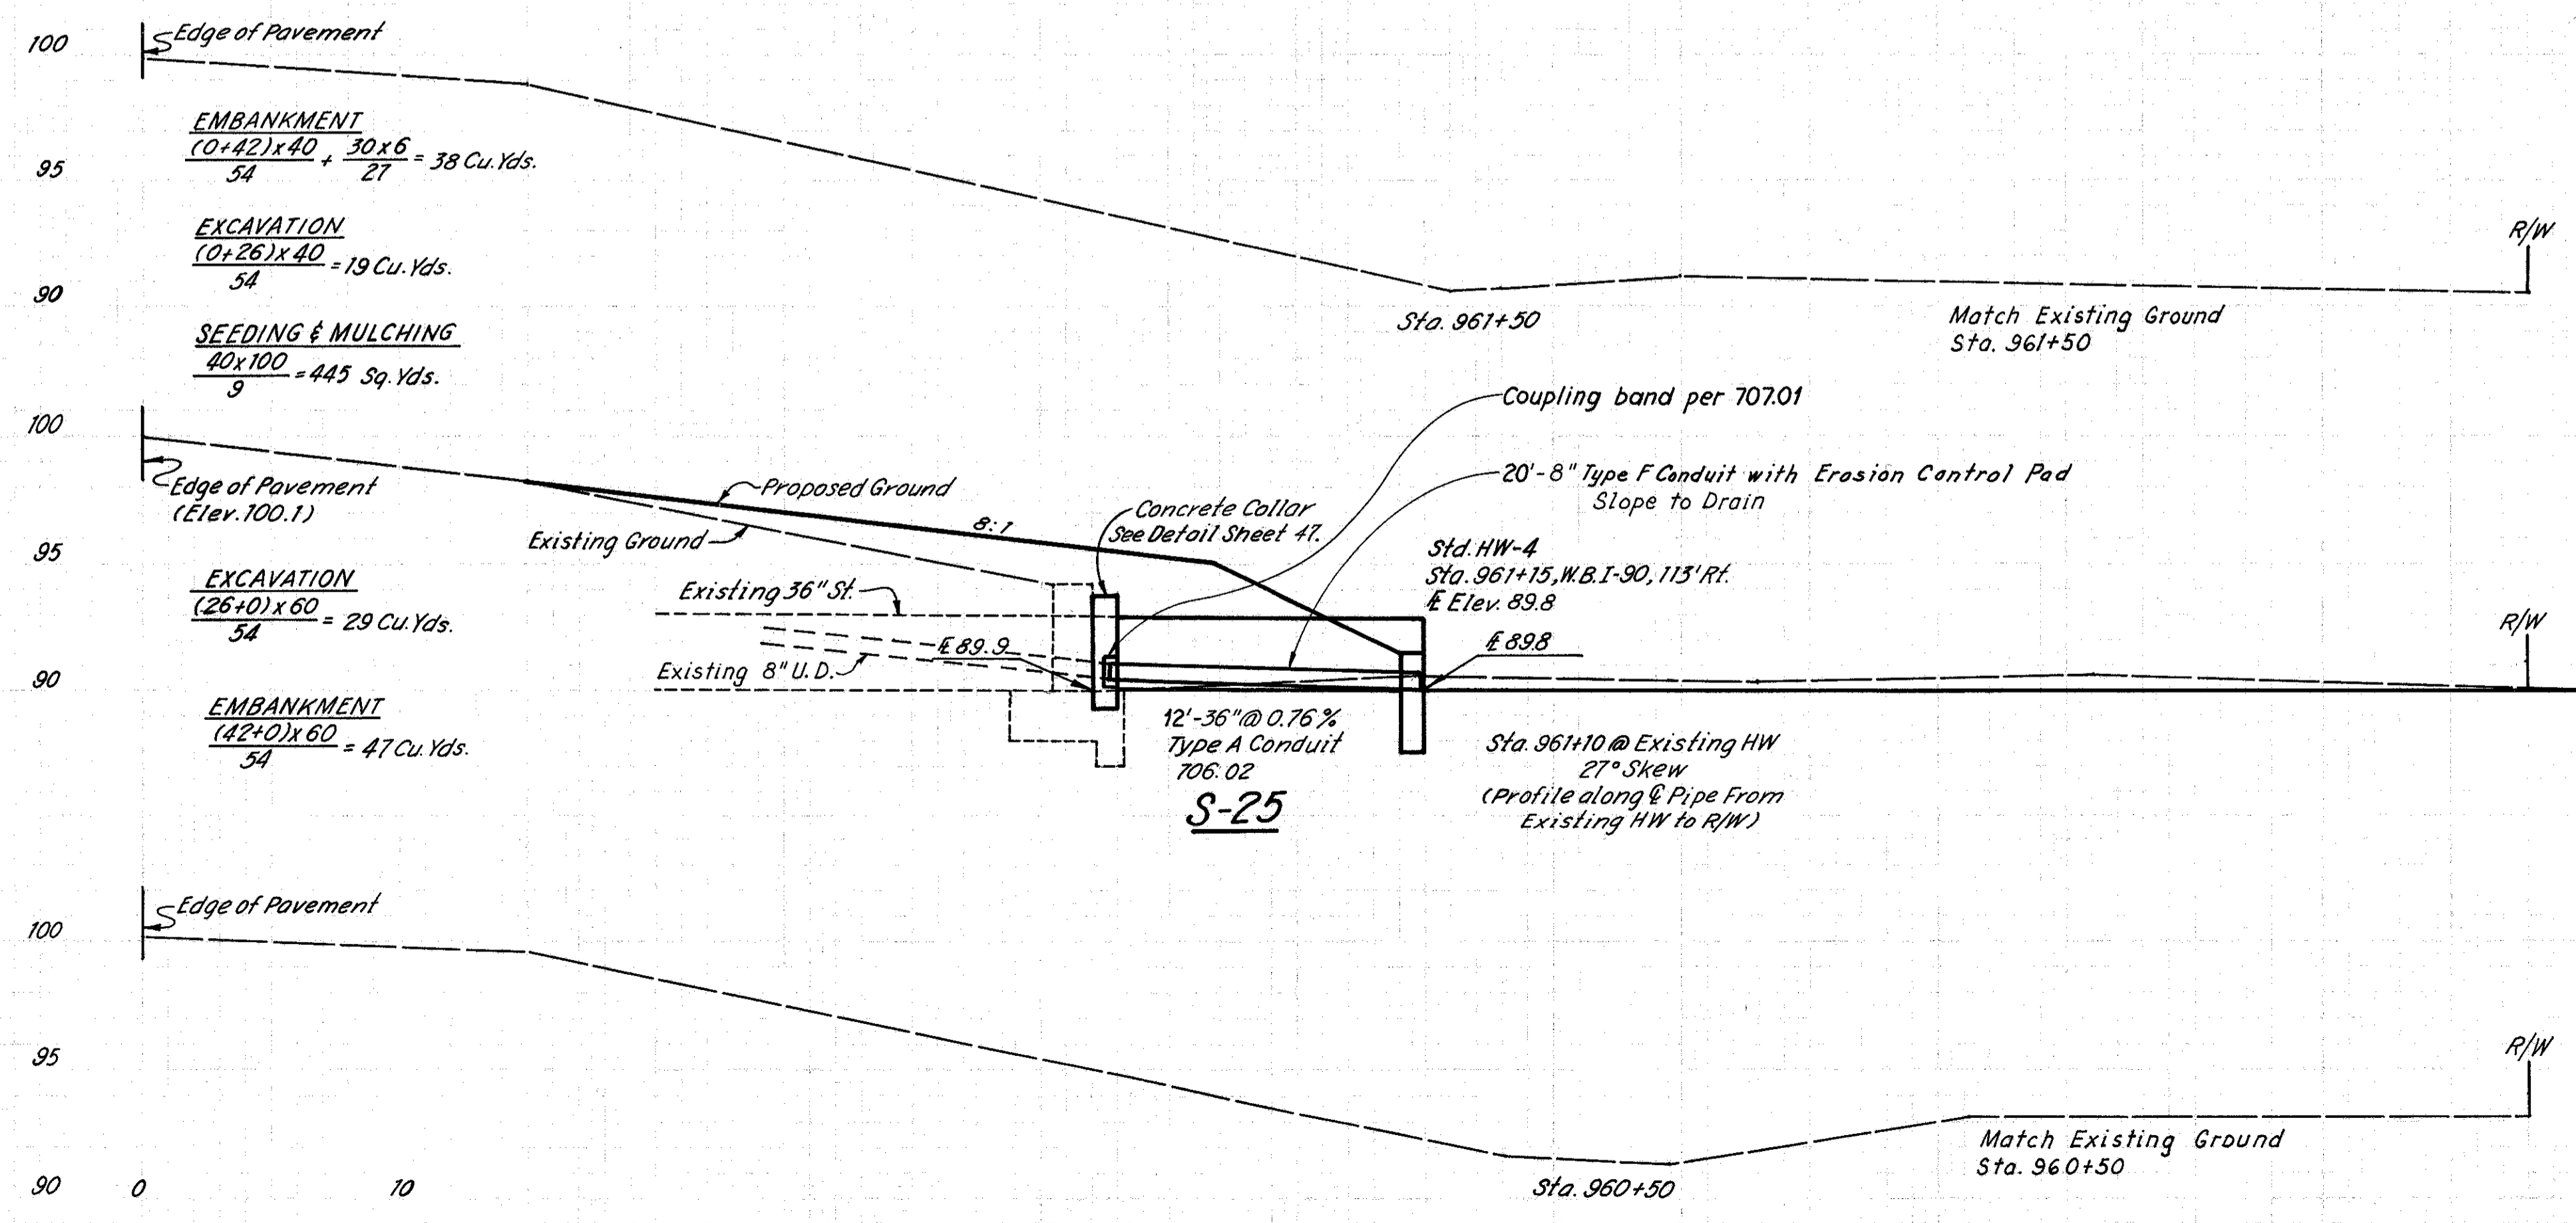

ESTIMATED QUANTITIES S-25

ITEM	DESCRIPTION	QUANTITY	UNIT
203	Excavation	48	Cu. Yds.
203	Embankment	85	Cu. Yds.
602	Concrete Masonry	0.69	Cu. Yds.
603	36" Conduit Type A 706.02 As per plan	12	Lin. Ft.
659	Seeding & Mulching	445	Sq. Yds.
603	8" Conduit Type F	20	Lin. Ft.

(For Plan View See Sheet No. 27)