

SEEDING AND MULCHING


$$\frac{38 \times 100}{9} = 422 \text{ Sq. Yds.}$$

QUANTITIES  
Made: TPM 11-1-72  
Ckd: LJD 11-2-72

EMBANKMENT


$$\frac{(0+105)100}{54} = 195 \text{ Cu. Yds.}$$

10-27-72  
10-30-72  
10-31-72  
11-1-72  
11-2-72  
LJD  
TPM

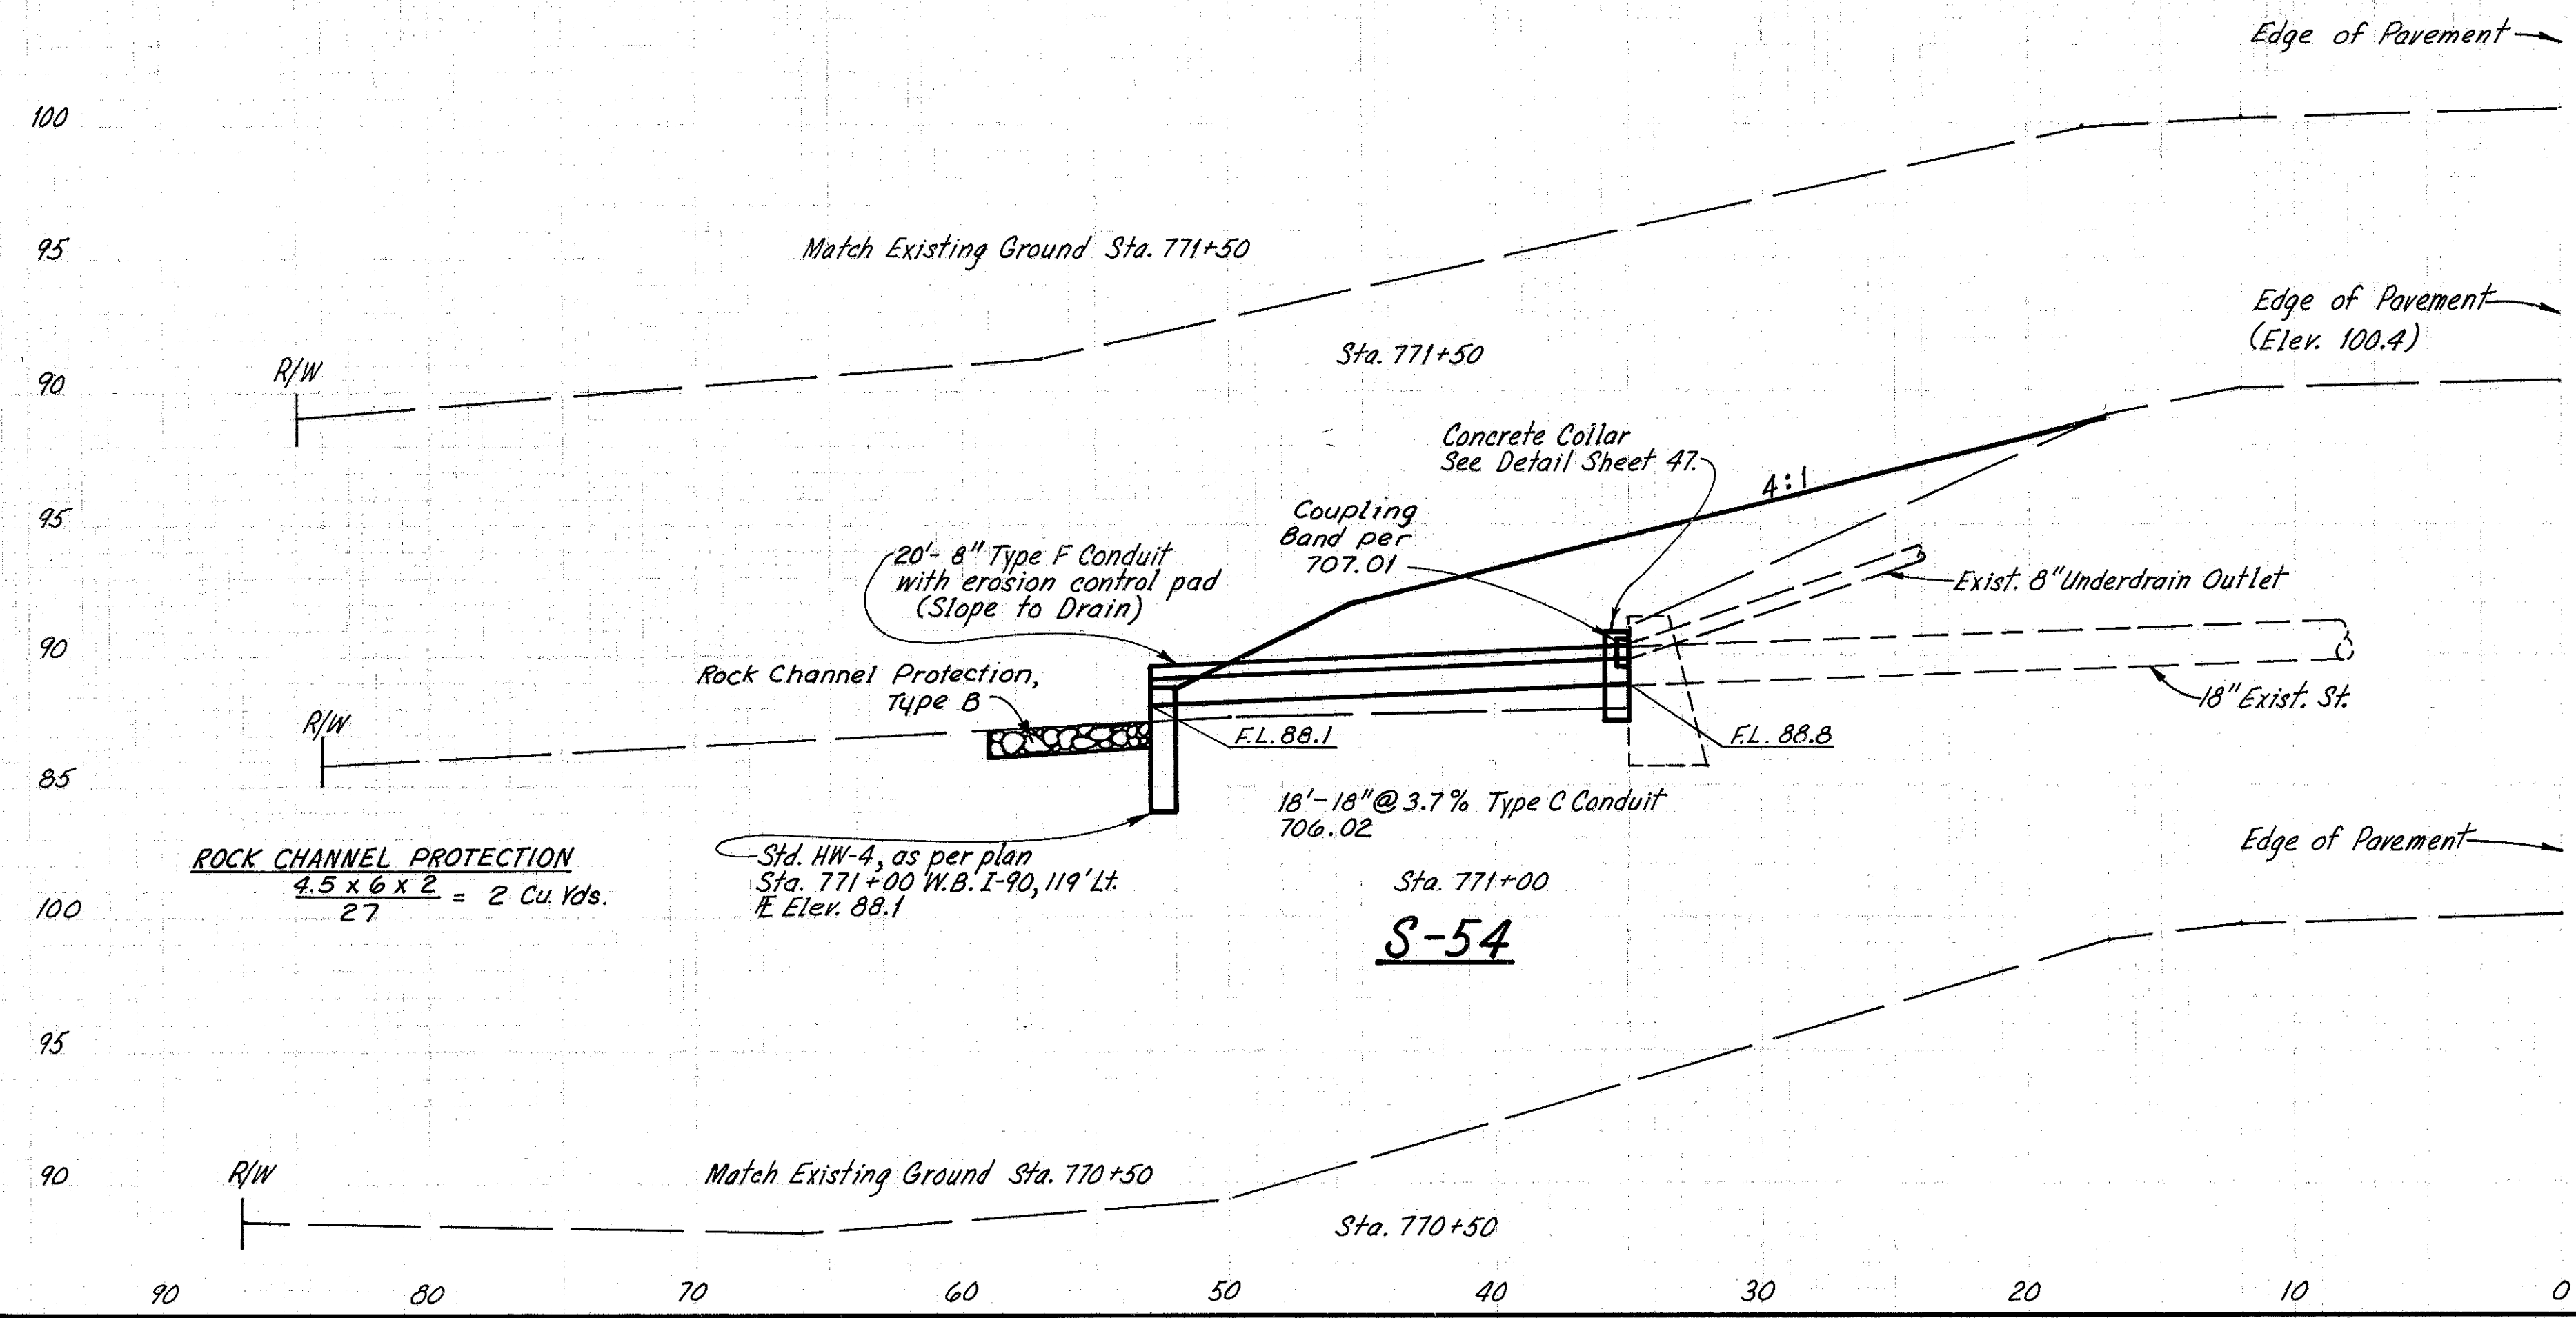

ESTIMATED QUANTITIES S-54			
ITEM	DESCRIPTION	QUANTITY	UNIT
203	Embankment	195	Cu. Yds.
601	Rock Channel Protection Type B	2	Cu. Yds.
602	Concrete Masonry	0.51	Cu. Yds.
603	8" Conduit Type F	20	Lin. Ft.
603	18" Conduit Type C, 706.02 as per plan	18	Lin. Ft.
659	Seeding and Mulching	422	Sq. Yds.

(For Plan View, see Sheet 24)

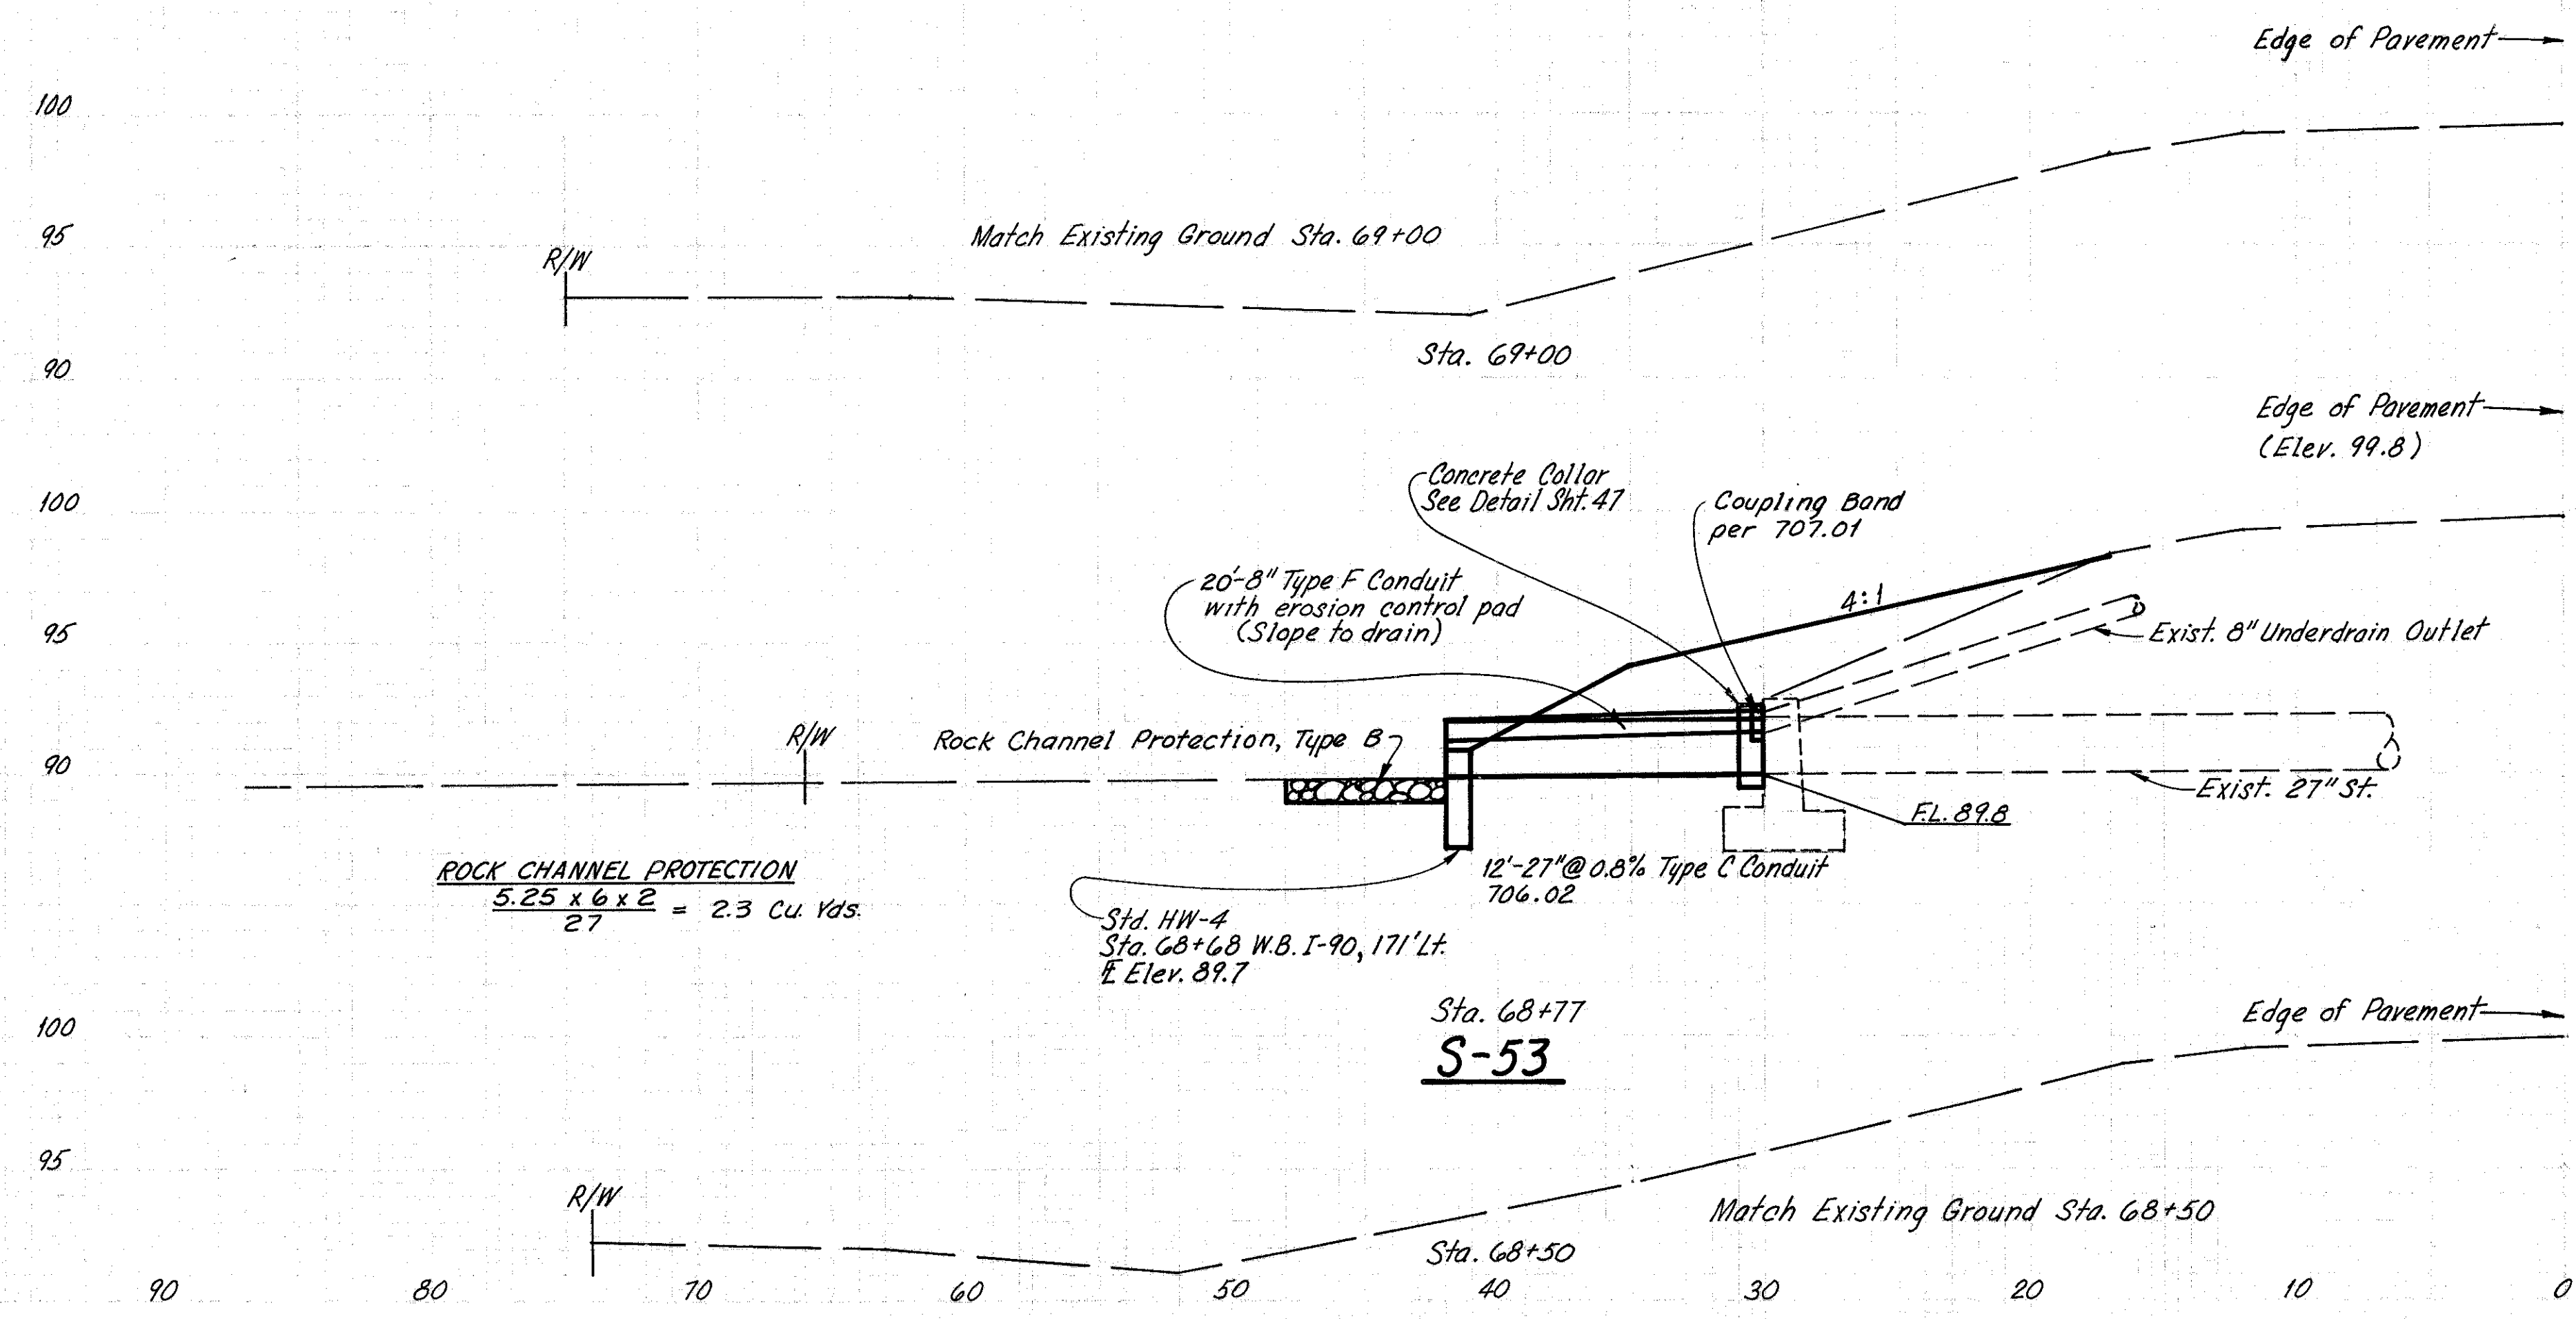

SEEDING AND MULCHING

$$\frac{36 \times 50}{9} = 200 \text{ Sq. Yds.}$$

EMBANKMENT

$$\frac{(0+60)50}{54} = 55.5 \text{ Cu. Yds.}$$

ESTIMATED QUANTITIES S-53			
ITEM	DESCRIPTION	QUANTITY	UNIT
203	Embankment	56	Cu. Yds.
601	Rock Channel Protection Type B	2	Cu. Yds.
602	Concrete Masonry	0.49	Cu. Yds.
603	8" Conduit Type F	20	Lin. Ft.
603	27" Conduit Type C, 706.02, as per plan	12	Lin. Ft.
659	Seeding and Mulching	200	Sq. Yds.

(For Plan View, see Sheet 12)