

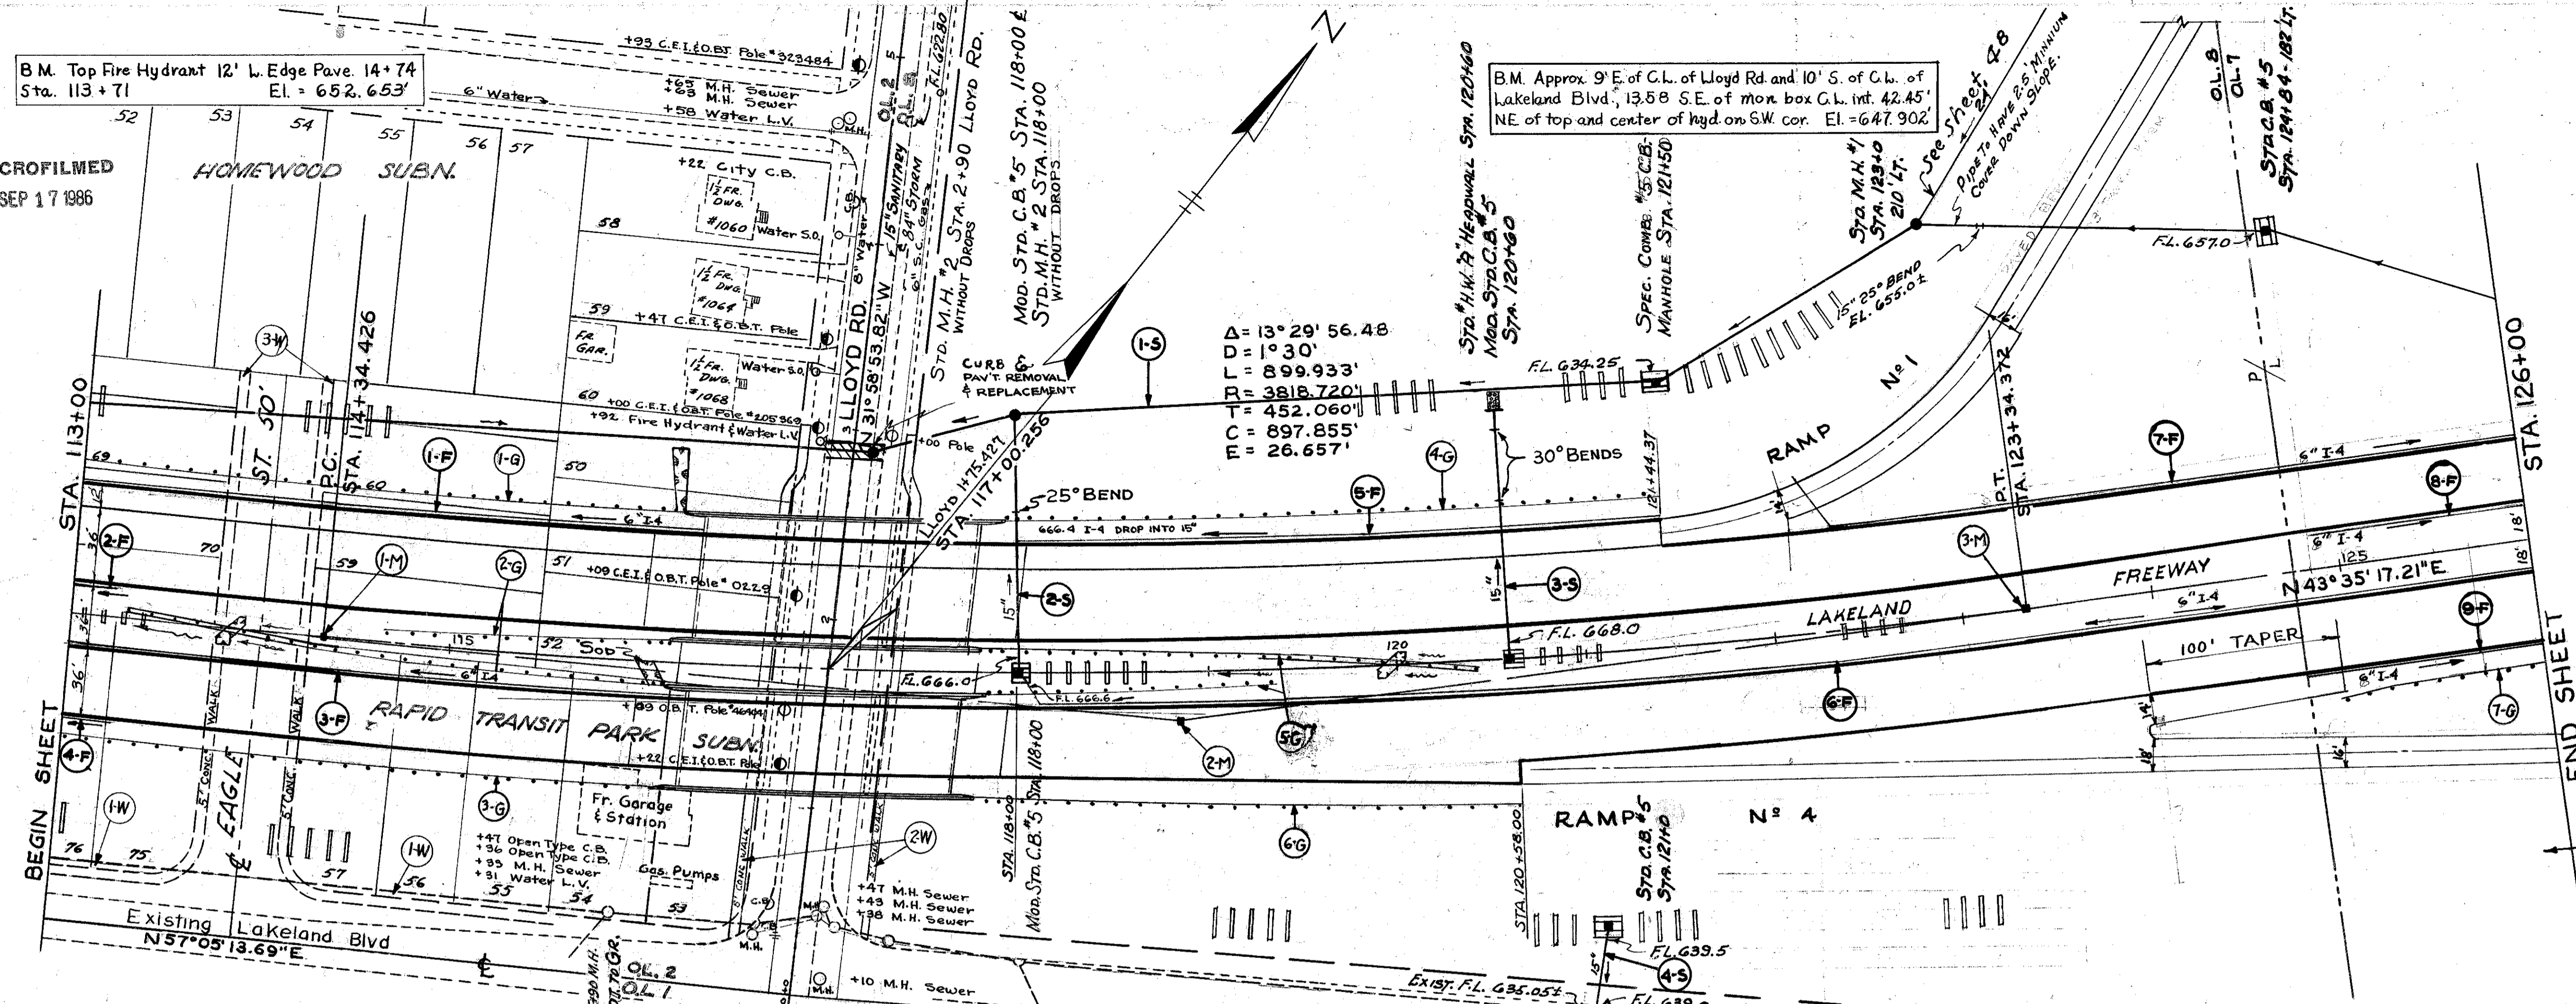


MICROFILMED
SEP 17 1986

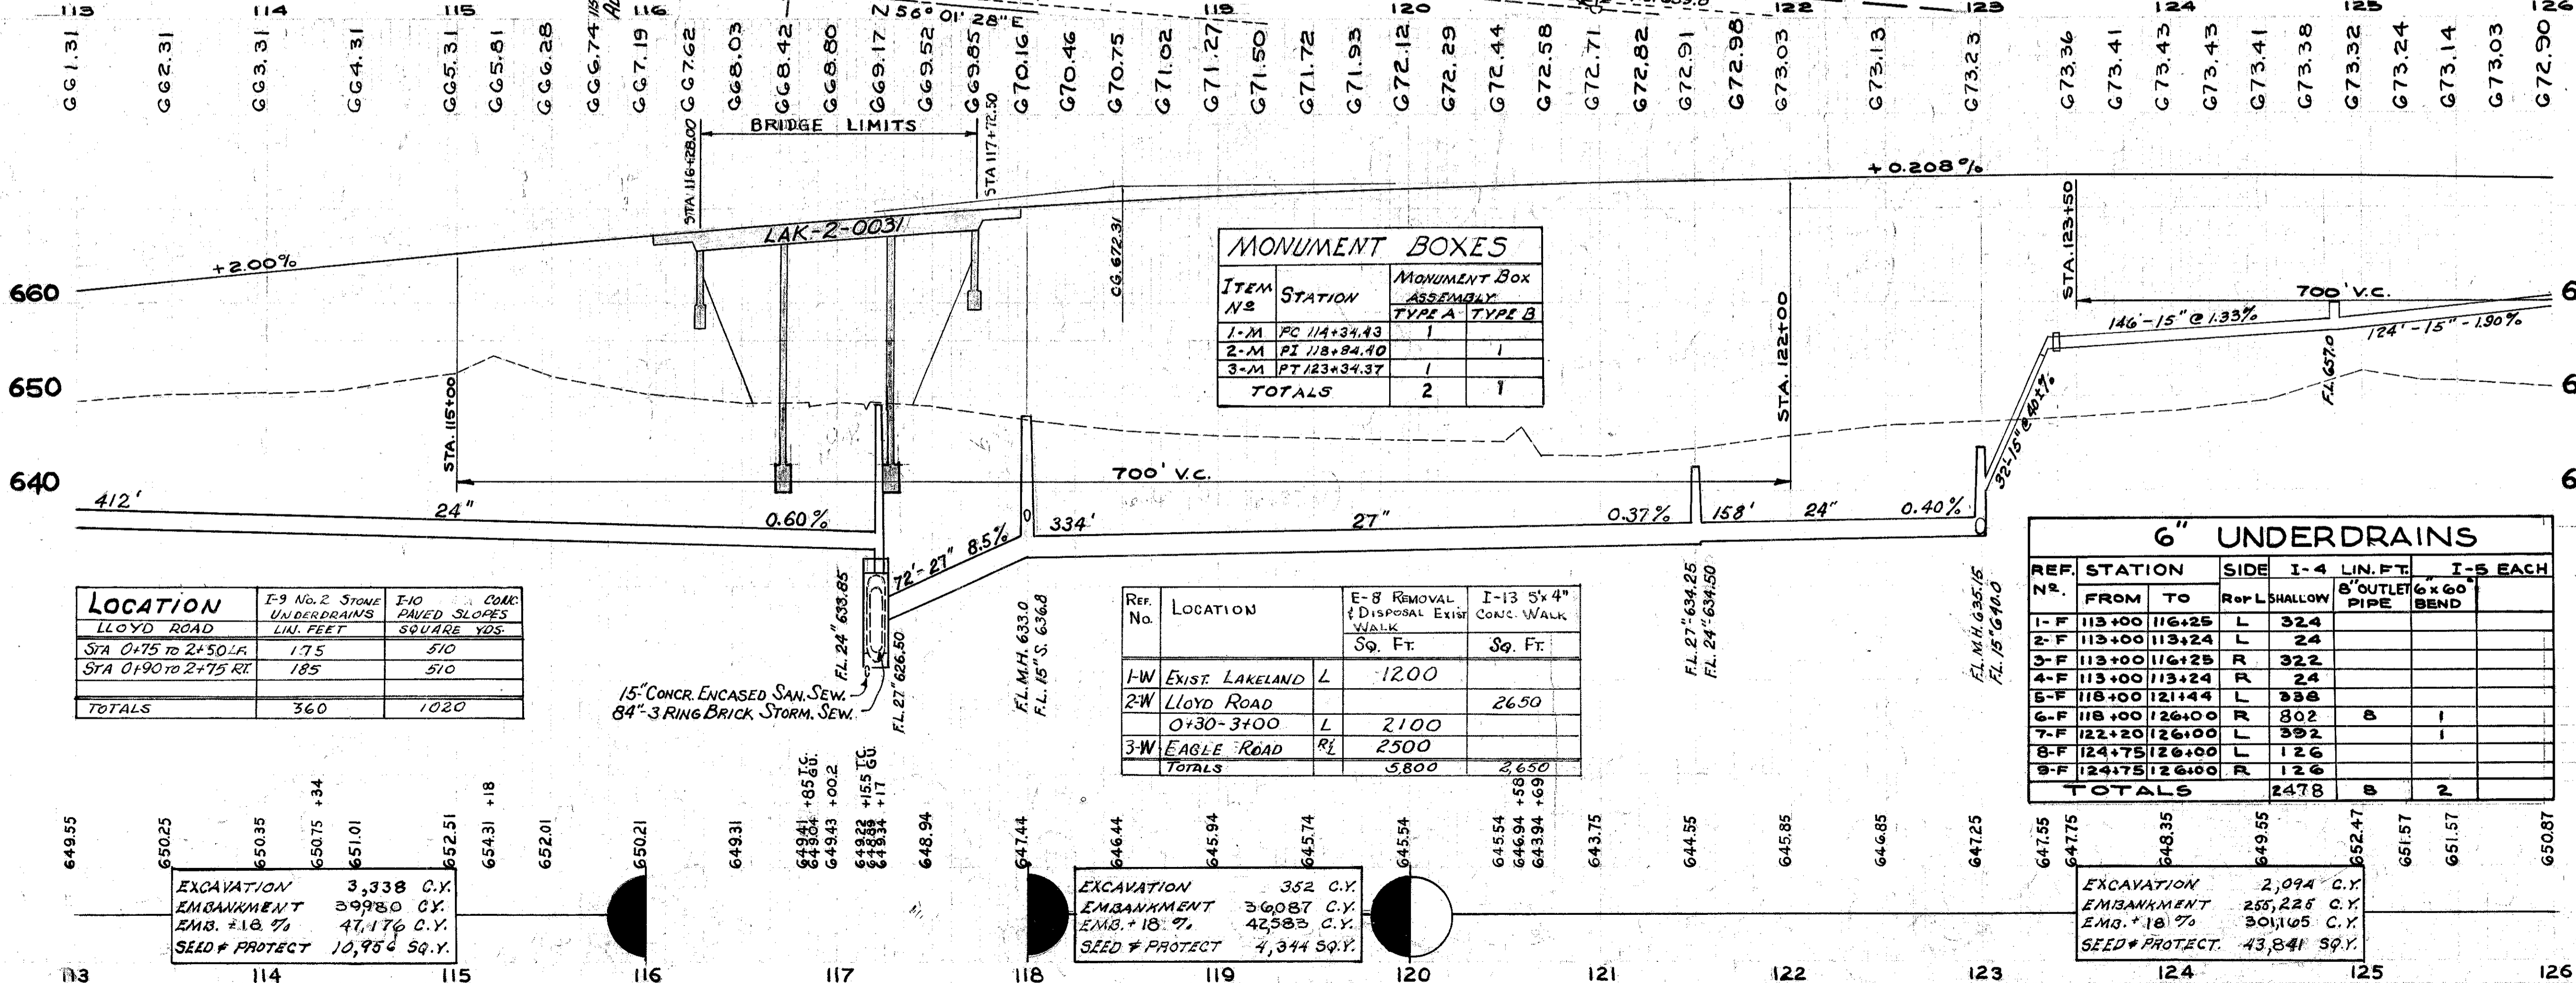

PROPOSED STRUCTURE
 TYPE: continuous reinforced concrete slab with reinforced concrete substructure
 SPANS: 44'-55\"-44' c/c brgs.
 ROADWAY: w.b. lanes 66'0\" f/f parapets
 E.B. lanes 54'0\" f/f parapets
 LOAD FREQUENCY: C.F. 2000(S7)
 (adequate for AASHTO alternate lds.)
 SKEW: 4'-55\" left forward
 WEAR SURFACE: 1\" monolithic concrete
 APPROACH SLABS: AS-1-54 (25' long)
 ALIGNMENT: 1'-30\" curve left
 SUPERELEVATION: 0.036 ft. per ft.

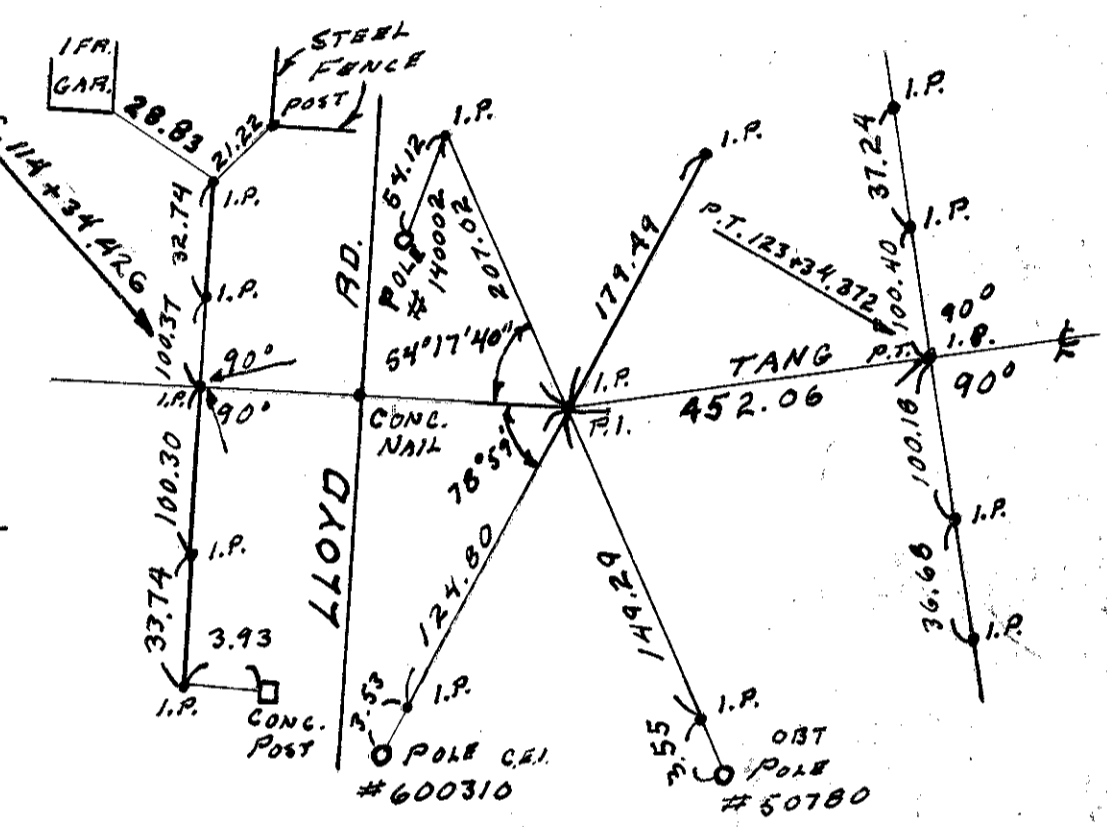

MONUMENT BOXES

ITEM NO	STATION	MONUMENT BOX ASSEMBLY	TYPE A	TYPE B
1-M	PC 114+34.43	1		
2-M	PI 118+84.10	1		
3-M	PT 123+34.37	1		
TOTALS		2	1	

I-15 GUARD RAIL

REF NO	STATIONS	SIDE	STANDARD BARRIER	NO 2-B
	FROM TO		LIN. FT.	LIN. FT.
1-B	113+00 116+20	L	319.0	
2-B	113+30 116+15	L/R	325.0	112.5
3-B	113+00 116+10	R	372.5	
4-B	117+90 121+44	L	344.5	
5-B	117+82 120+70	L/R	325.0	112.5
6-B	117+80 120+58	R	289.5	
7-B	124+95 126+00	R	108.0	
TOTALS			2023.5	225.0

SEE SHEET NO 49 FOR STORM SEWER TABLE.

6\" UNDERDRAINS

REF. NO.	STATION	SIDE	I-4 LIN. FT.	I-5 EACH
	FROM TO	REP L SHALLOW	B' OUTLET PIPE	6x60 BEND
1-F	113+00 116+25	L	324	
2-F	113+00 113+24	L	24	
3-F	113+00 116+25	R	322	
4-F	113+00 113+24	R	24	
5-F	118+00 121+44	L	338	
6-F	118+00 126+00	R	802	1
7-F	122+20 126+00	R	382	
8-F	124+75 126+00	R	126	
9-F	124+75 126+00	R	126	
TOTALS			2478	2

LOCATION	I-9 No. 2 STONE UNDERDRAINS LIN. FEET	I-10 CORR. PAVED SLOPES SQUARE YDS.
LLOYD ROAD		
STA 0+75 TO 2+50 L.R.	175	510
STA 0+90 TO 2+75 R.R.	185	510
TOTALS	360	1020

Ref. No.	LOCATION	E-8 REMOVAL & DISPOSAL EXIST WALK SQ. FT.	I-13 5x4\" CONC. WALK SQ. FT.
1-W	EXIST. LAKELAND	1200	
2-W	LLOYD ROAD		2650
3-W	EAGLE ROAD	2100	
TOTALS		5800	2,650

LOCATION	E-8 REMOVAL & DISPOSAL OF EXIST. PAVT. SQ. YDS.	T-70-9\" PORT. CEMENT CONC. PAVT. SQ. YDS.
LLOYD RD.		
STA 2+90	26	26

LOCATION	E-8 REMOVAL & DISPOSAL OF EXISTING CURB LIN. FT.	I-12 CONC. CURB TYPE 2-A LIN. FT.
LLOYD RD.		
STA 2+90	16	16

LOCATION	EXCAVATION	EMBANKMENT	EMB. #18 %	SEED & PROTECT
LLOYD ROAD	3,338 C.Y.	3,998.0 C.Y.	47,176 C.Y.	10,954 Sq.Y.

LOCATION	EXCAVATION	EMBANKMENT	EMB. #18 %	SEED & PROTECT
LLOYD ROAD	352 C.Y.	3,608.7 C.Y.	42,583 C.Y.	4,344 Sq.Y.

LOCATION	EXCAVATION	EMBANKMENT	EMB. #18 %	SEED & PROTECT
LLOYD ROAD	2,094 C.Y.	255,225 C.Y.	301,105 C.Y.	43,841 Sq.Y.