


DRIVEWAY QUANTITIES		TOTALS	
Item No	Station	Excavation	Quantity
1-A	R 113+60	17.8	2.5
2-A	L 113+60	16.4	3.2
3-A	R 114+15	11.6	2.7
4-A	L 114+65	4.0	2.7
5-A	R 115+30	16.4	3.2
6-A	R 115+30	16.4	3.2
7-A	L 117+06	18.9	3.7
8-A	R 118+80	23.1	4.5
9-A	R 119+05	19.6	3.8
10-A	R 120+13	48.2	9.3
11-A	R 121+57	28.7	5.5
12-A	R 121+82	14.0	2.7
<b>TOTALS</b>		<b>270.5</b>	<b>524</b>

MONUMENT BOXES		
ITEM No	STATION	MONUMENT BOX ASSEMBLY TYPE
1-M	PI 123+21.21	I

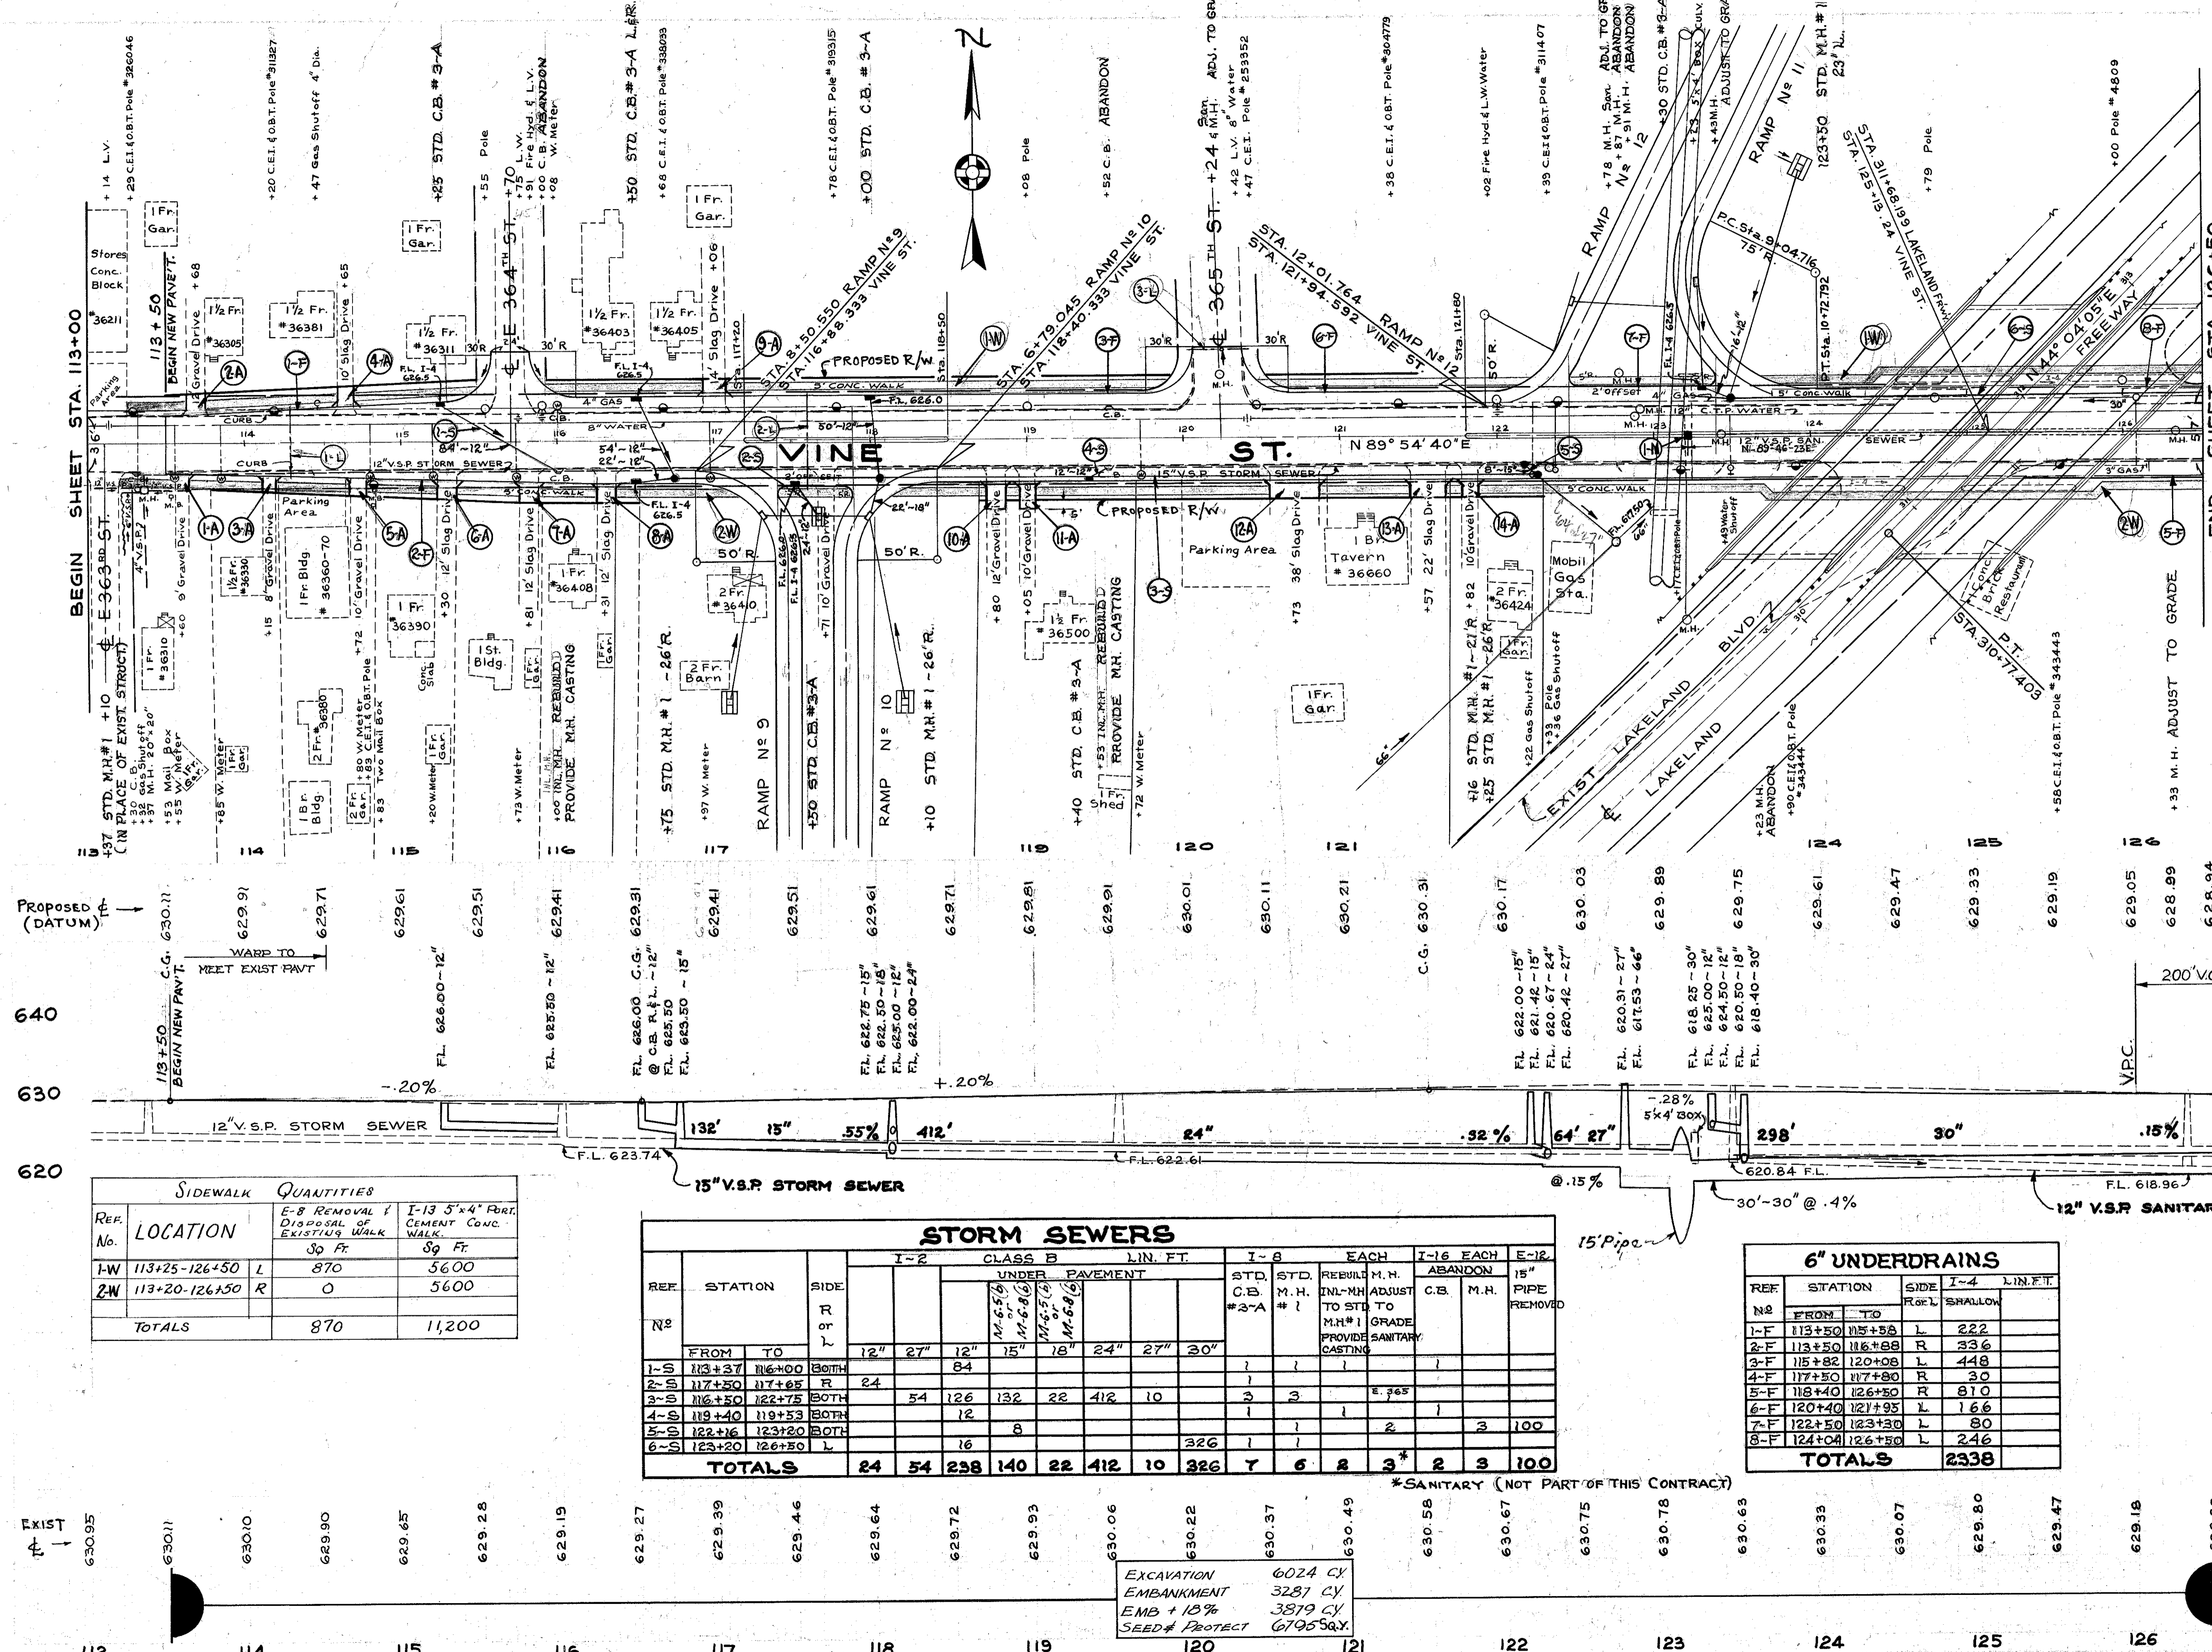

SIDEWALK QUANTITIES			
REF. No.	LOCATION	30 Ft.	36 Ft.
1-W	113+25-126+50	870	5600
2-W	113+20-126+50	0	5600
<b>TOTALS</b>		<b>870</b>	<b>11,200</b>

STORM SEWERS																
REF. No.	STATION	SIDE	CLASS B LIN. FT.						I-8 EACH			I-16 EACH		E-12 15" PIPE REMOVED		
			12"	27"	12"	15"	18"	24"	27"	30"	STD. C.B. #3-A	STD. M.H. #	REBUILD INL-MH TO STD. M.H.#1 GRADE PROVIDE SANITARY CASTING		M.H. ADJUST TO STD. C.B. M.H.	ABANDON
1-S	113+37	BOTH														
2-S	117+50	R	24													
3-S	116+50	BOTH		54	126	132	22	412	10							
4-S	119+40	BOTH			12											
5-S	122+16	BOTH				8										
6-S	123+20	L			16				326							
<b>TOTALS</b>			<b>24</b>	<b>54</b>	<b>238</b>	<b>140</b>	<b>22</b>	<b>412</b>	<b>10</b>	<b>326</b>	<b>7</b>	<b>6</b>	<b>2</b>	<b>3</b>	<b>3</b>	<b>100</b>

6" UNDERDRAINS				
REF. No.	STATION	SIDE	I-4 SHALLOW	LIN. FT.
1-F	113+50	L	222	
2-F	113+50	R	236	
3-F	115+82	L	448	
4-F	117+50	R	30	
5-F	118+40	R	810	
6-F	120+40	L	166	
7-F	122+50	L	80	
8-F	124+04	L	246	
<b>TOTALS</b>			<b>2338</b>	

5-25 ELECTRICAL DUCT				
REF. No.	LOCATION	SIZE	LENGTH	LENGTH
			LIN. FT.	LIN. FT.
1-L	STA 114+30	2-2"	48	
2-L	STA 117+60	2-2"	62	
3-L	E 365 <sup>TH</sup> O+55	1-2" #1-4"		35
<b>TOTALS</b>			<b>110</b>	<b>35</b>

EXCAVATION 6024 CY  
EMBANKMENT 3287 CY  
EMB + 15% 3879 CY  
SEED & PROTECT 6795 SQ.