
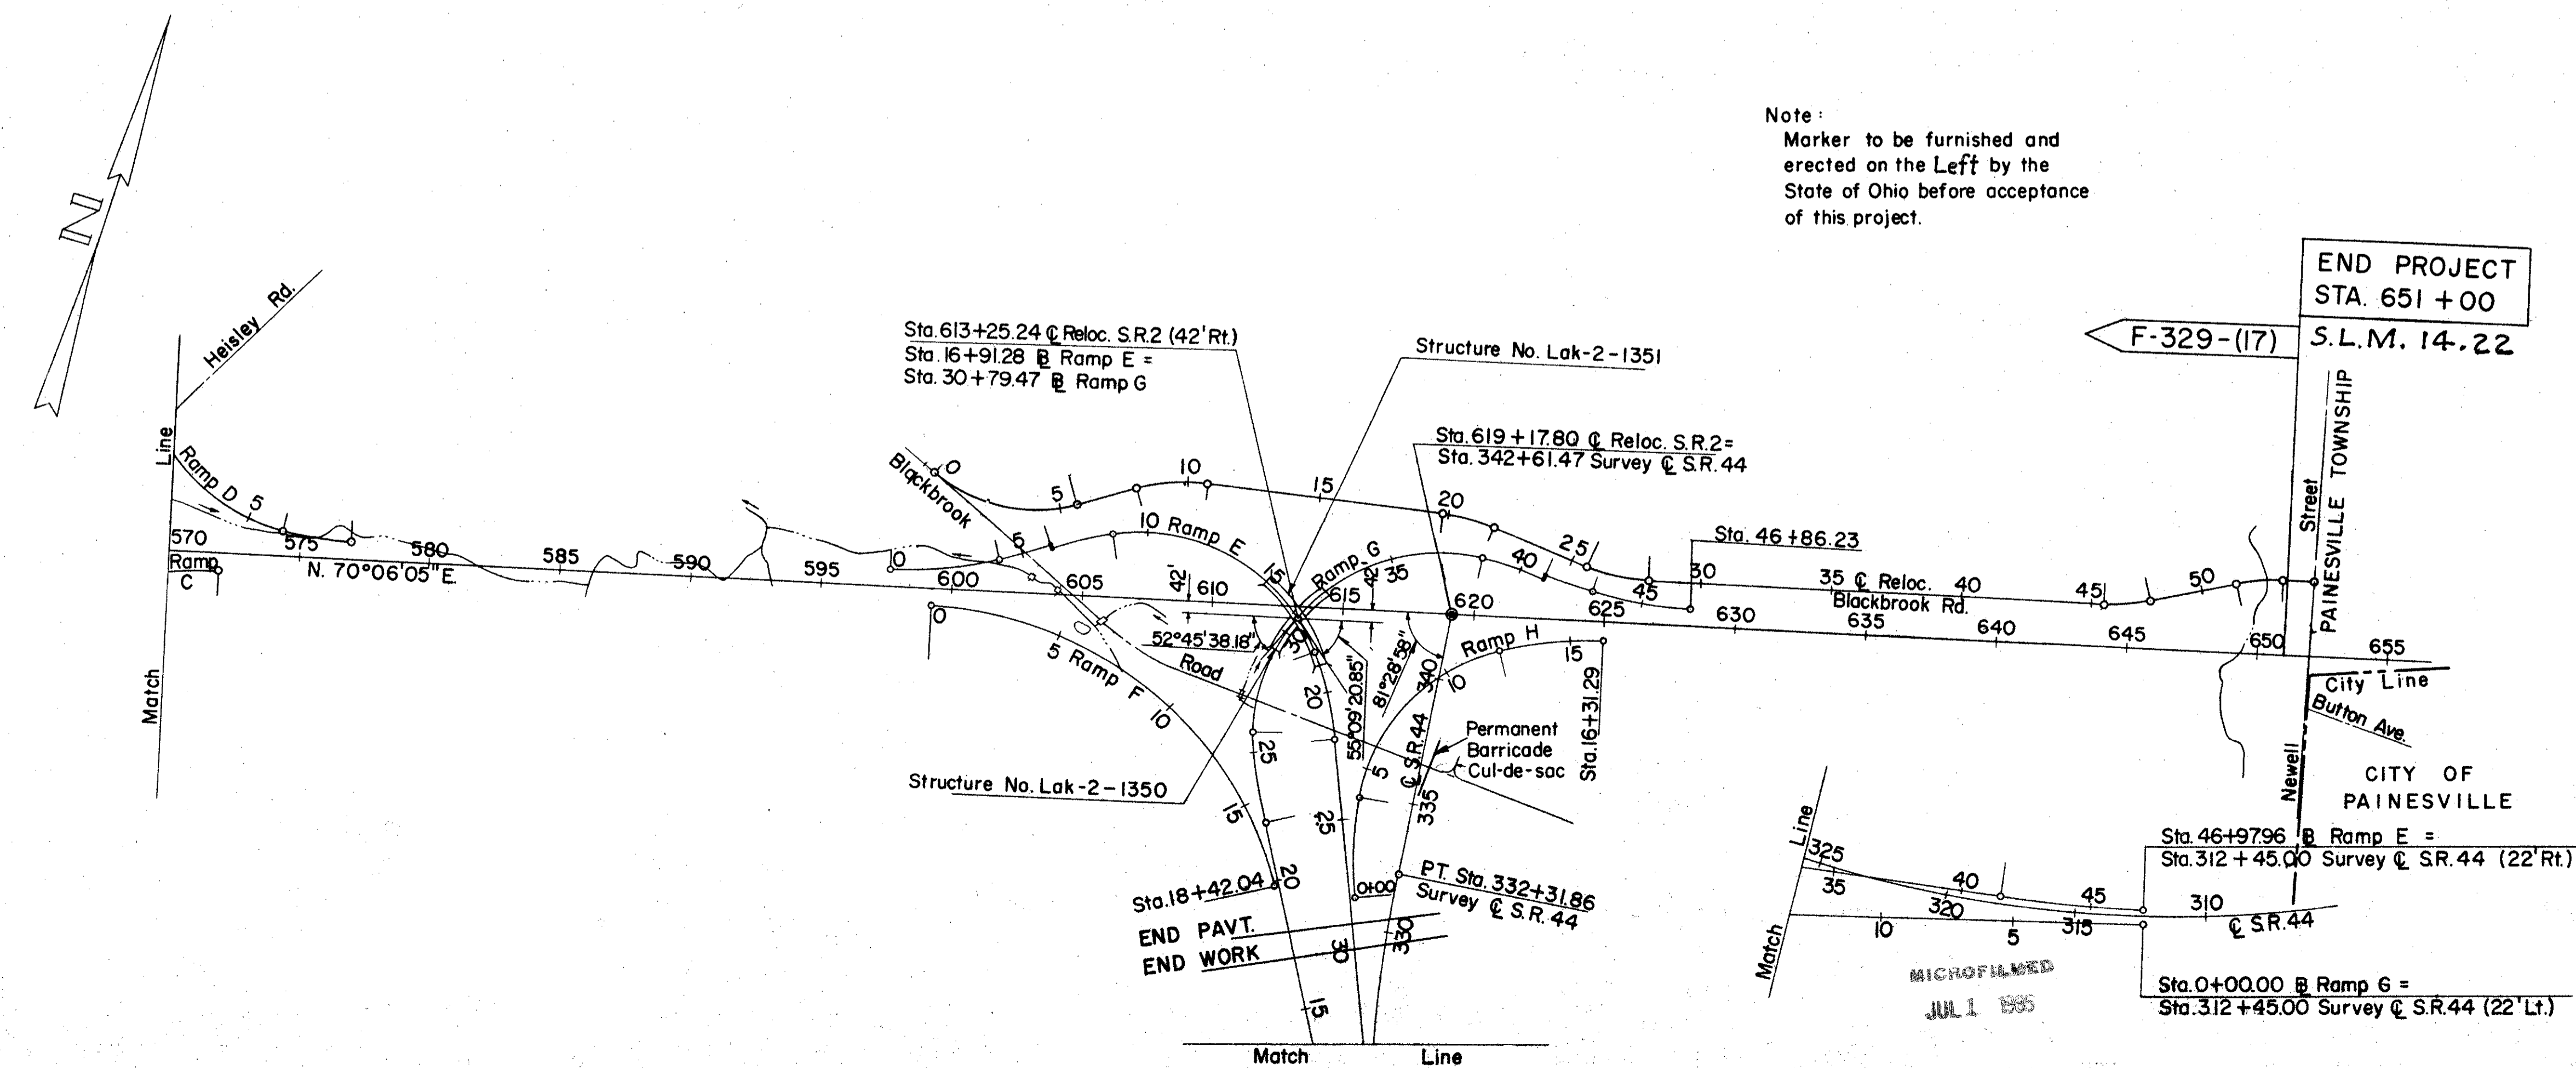


SCHEMATIC LAYOUT PLAN

FED. NO. DIVISION	STATE	PROJECT	12 379
2	OHIO		

LAKE COUNTY
LAK-2-10.35

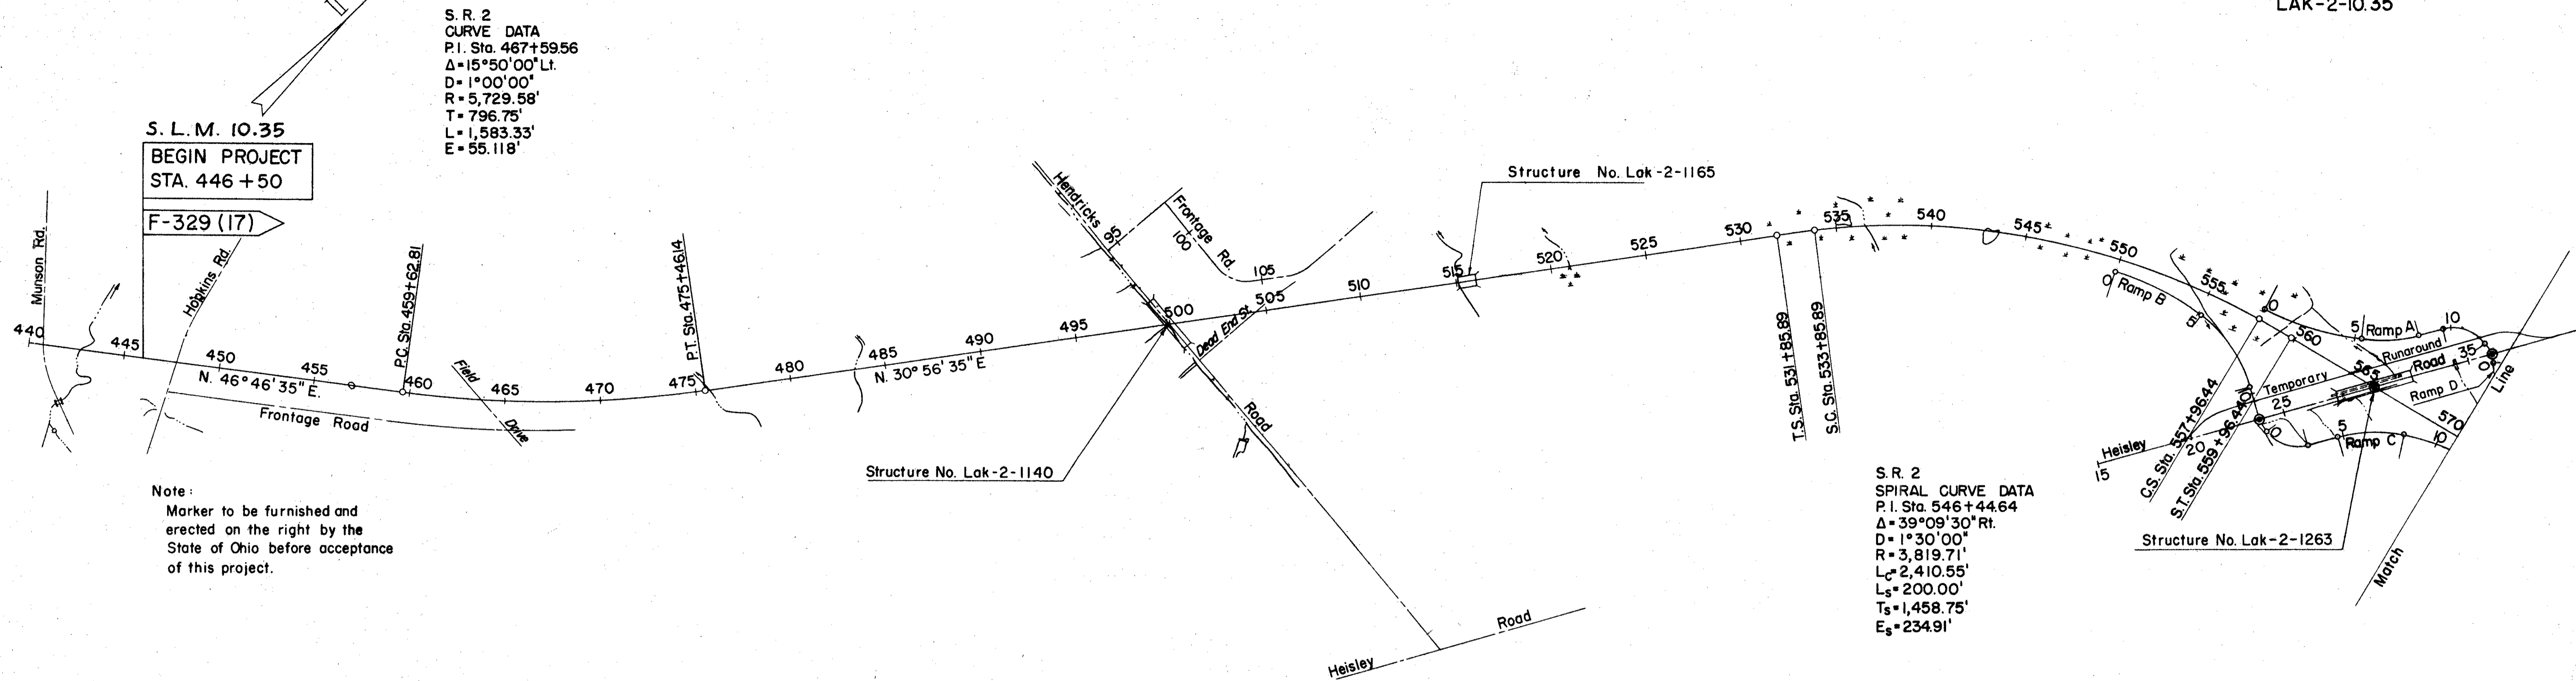

LIGHTS, SIGNS, AND BARRICADES

The Contractor shall, in addition to the general requirements of Sec. G-7.07, on this project perform the following:

- (a) Provide, erect, and maintain movable gates on intersecting roads closed to traffic at all points where local traffic movement terminates.
- (b) Provide, erect, and maintain lights, signs, and barricades at the work limits on all intersecting roads which remain open to traffic.
- (c) Provide, erect, and maintain standard 40" x 24" size "Road Closed" signs, sign supports, and lights at the following locations during periods in which the affected roads are closed to traffic:
 1. Hendricks Road just South of S.R. 2 at the intersection of Heisley Road and Hendricks Road.
 2. Hendricks Road just North of S.R. 2 at the intersection of Hopkins Road and Hendricks Road.

Lights, barricades, and danger and warning signs shall be provided at locations shown above in accordance with Sec. G-7.07. Barricades and gates shall be as detailed on Standard Construction Drawing No. G-7.07. Sign supports and lights for "Road Closed" signs shall be as detailed in the "Ohio Manual of Uniform Traffic Control Devices." Payment for providing, erecting, maintaining, and removing barricades, gates, lights, signs, and sign supports shall be included in the lump sum price bid for "Maintaining Traffic."

Scale: 1" = 400'