


NOTE:  
Remove Depressed Curb and Replace with Type 6 Curb as shown on plan.

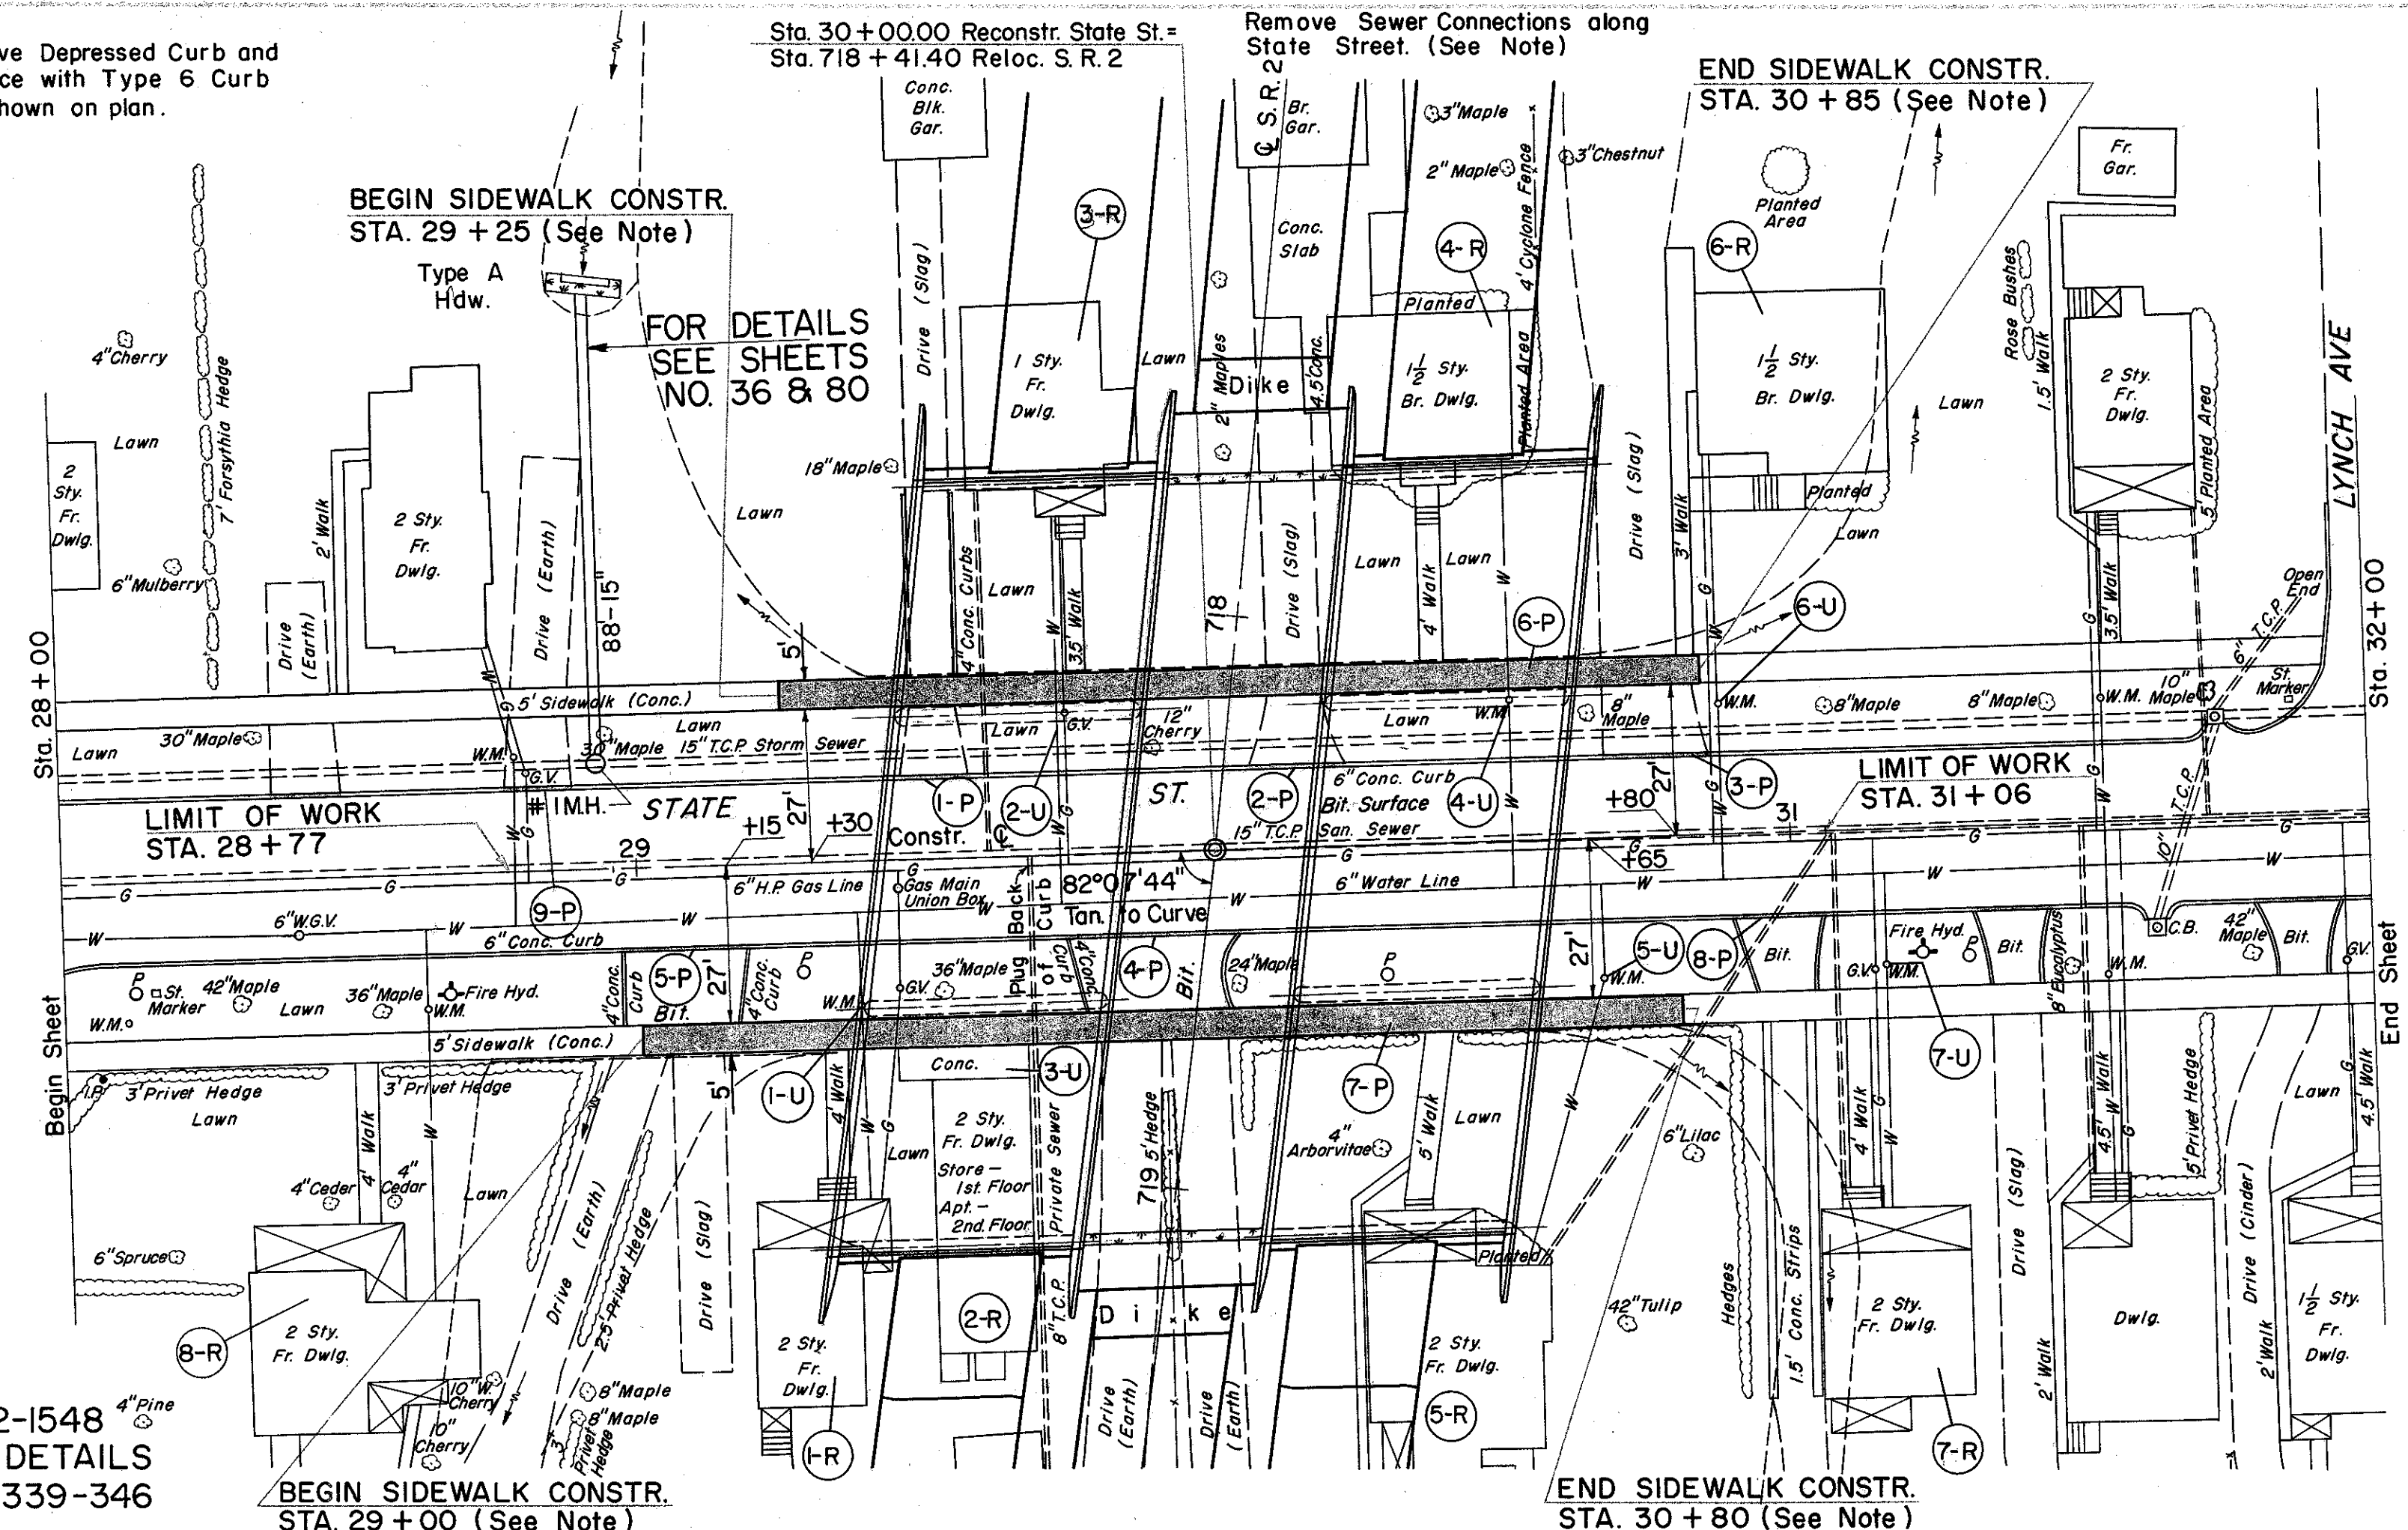

FOR POWER ADJUSTMENTS  
SEE SHEET NO. 287

BRIDGE NO. LAK-2-1548  
FOR STRUCTURE DETAILS  
SEE SHEETS NO. 339-346

(R) ROADWAY

REF. NO.	STATION		SIDE	E-4 GRANULAR BORROW	
	FROM	TO			C.Y.
1-R	29+30		Rt.		131
2-R	29+60		Rt.		212
3-R	29+70		Lt.		205
4-R	30+40		Lt.		217
5-R	30+40		Rt.		264
6-R	31+00		Lt.		270
7-R	31+15		Rt.		162
8-R	28+50		Rt.		249
TOTAL					1710

(P) PAVEMENT

REF. NO.	STATION		SIDE	I-12 CONC. CURB TYPE 6		I-13 CONC. SIDE WALK 4"	
	FROM	TO		L.F.	S.F.	L.F.	S.F.
1-P	29+45	29+57	Lt.	12			
2-P	30+05	30+22	Lt.	17			
3-P	30+67	30+85	Lt.	18			
4-P	29+74	30+04	Rt.	30			
5-P	28+96	29+19	Rt.	23			
6-P	29+25	30+85	Lt.		800		
7-P	29+00	30+80	Rt.		900		
8-P	30+89	31+06	Rt.	17			
9-P	28+77	28+90	Lt.	13			
TOTAL				130	1700		

(U) UTILITIES

REF. NO.	STATION		SIDE	I-124.08 SERVICE STOPS & BOXES REMOVED		I-124.11 WATER METERS & BOXES REMOVED	
	FROM	TO		EA.	EA.	EA.	EA.
1-U	29+38		Rt.	1			
2-U	29+74		Lt.	1			
3-U	29+60		Rt.	1			
4-U	30+52		Lt.	1			
5-U	30+66		Rt.	1			
6-U	30+88		Lt.	1			
7-U	31+16		Rt.	1			
TOTAL				7	7		

Excavation	59 C.Y.
Backfill	9 C.Y.
Paving	10 C.Y.

