



| PARTICIPATION | | ESTIMATED QUANTITIES | | | | CALC. BY: LEL DATE: 6/08 CHK'D BY: P.JL DATE: 6/08 | |
|---------------|---------|----------------------|-----------|-----------------|-------|--|---------------------------------|
| I REHAB | II TRAC | ITEM | EXTENSION | STRUCTURE TOTAL | UNIT | DESCRIPTION | AS PER PLAN STRUCTURE SHEET NO. |
| LUMP | LUMP | 503 | 11100 | LUMP | LUMP | COFFERDAMS, CRIBS AND SHEETING | |
| 37 | 112 | 512 | 10101 | 149 | SQ YD | SEALING OF CONCRETE SURFACES (EPOXY-URETHANE), AS PER PLAN "A" | 3/3 |
| 176 | 529 | 512 | 10101 | 705 | SQ YD | SEALING OF CONCRETE SURFACES (EPOXY-URETHANE), AS PER PLAN "B" | 3/3 |
| 2110 | 6330 | 840 | 20000 | 8440 | SQ FT | MECHANICALLY STABILIZED EARTH WALL | |
| 1906 | 5718 | 840 | 21001 | 7624 | CU YD | WALL EXCAVATION, AS PER PLAN | |
| 263 | 791 | 840 | 22000 | 1054 | SQ YD | FOUNDATION PREPARATION | |
| 2606 | 7819 | 840 | 23000 | 10425 | CU YD | SELECT GRANULAR BACKFILL | |
| 223 | 668 | 840 | 25010 | 891 | FT | 6" DRAINAGE PIPE, PERFORATED | |
| 4 | 13 | 840 | 25020 | 17 | FT | 6" DRAINAGE PIPE, NON-PERFORATED | |
| 107 | 321 | 840 | 26000 | 428 | FT | CONCRETE COPING | |
| 2110 | 6330 | 840 | 26050 | 8440 | SQ FT | AESTHETIC SURFACE TREATMENT | |
| 1 | 4 | 840 | 27000 | 5 | DAYS | ON-SITE ASSISTANCE | |
| LUMP | LUMP | 840 | 28000 | LUMP | LUMP | SGB INSPECTION AND COMPACTION TESTING | |

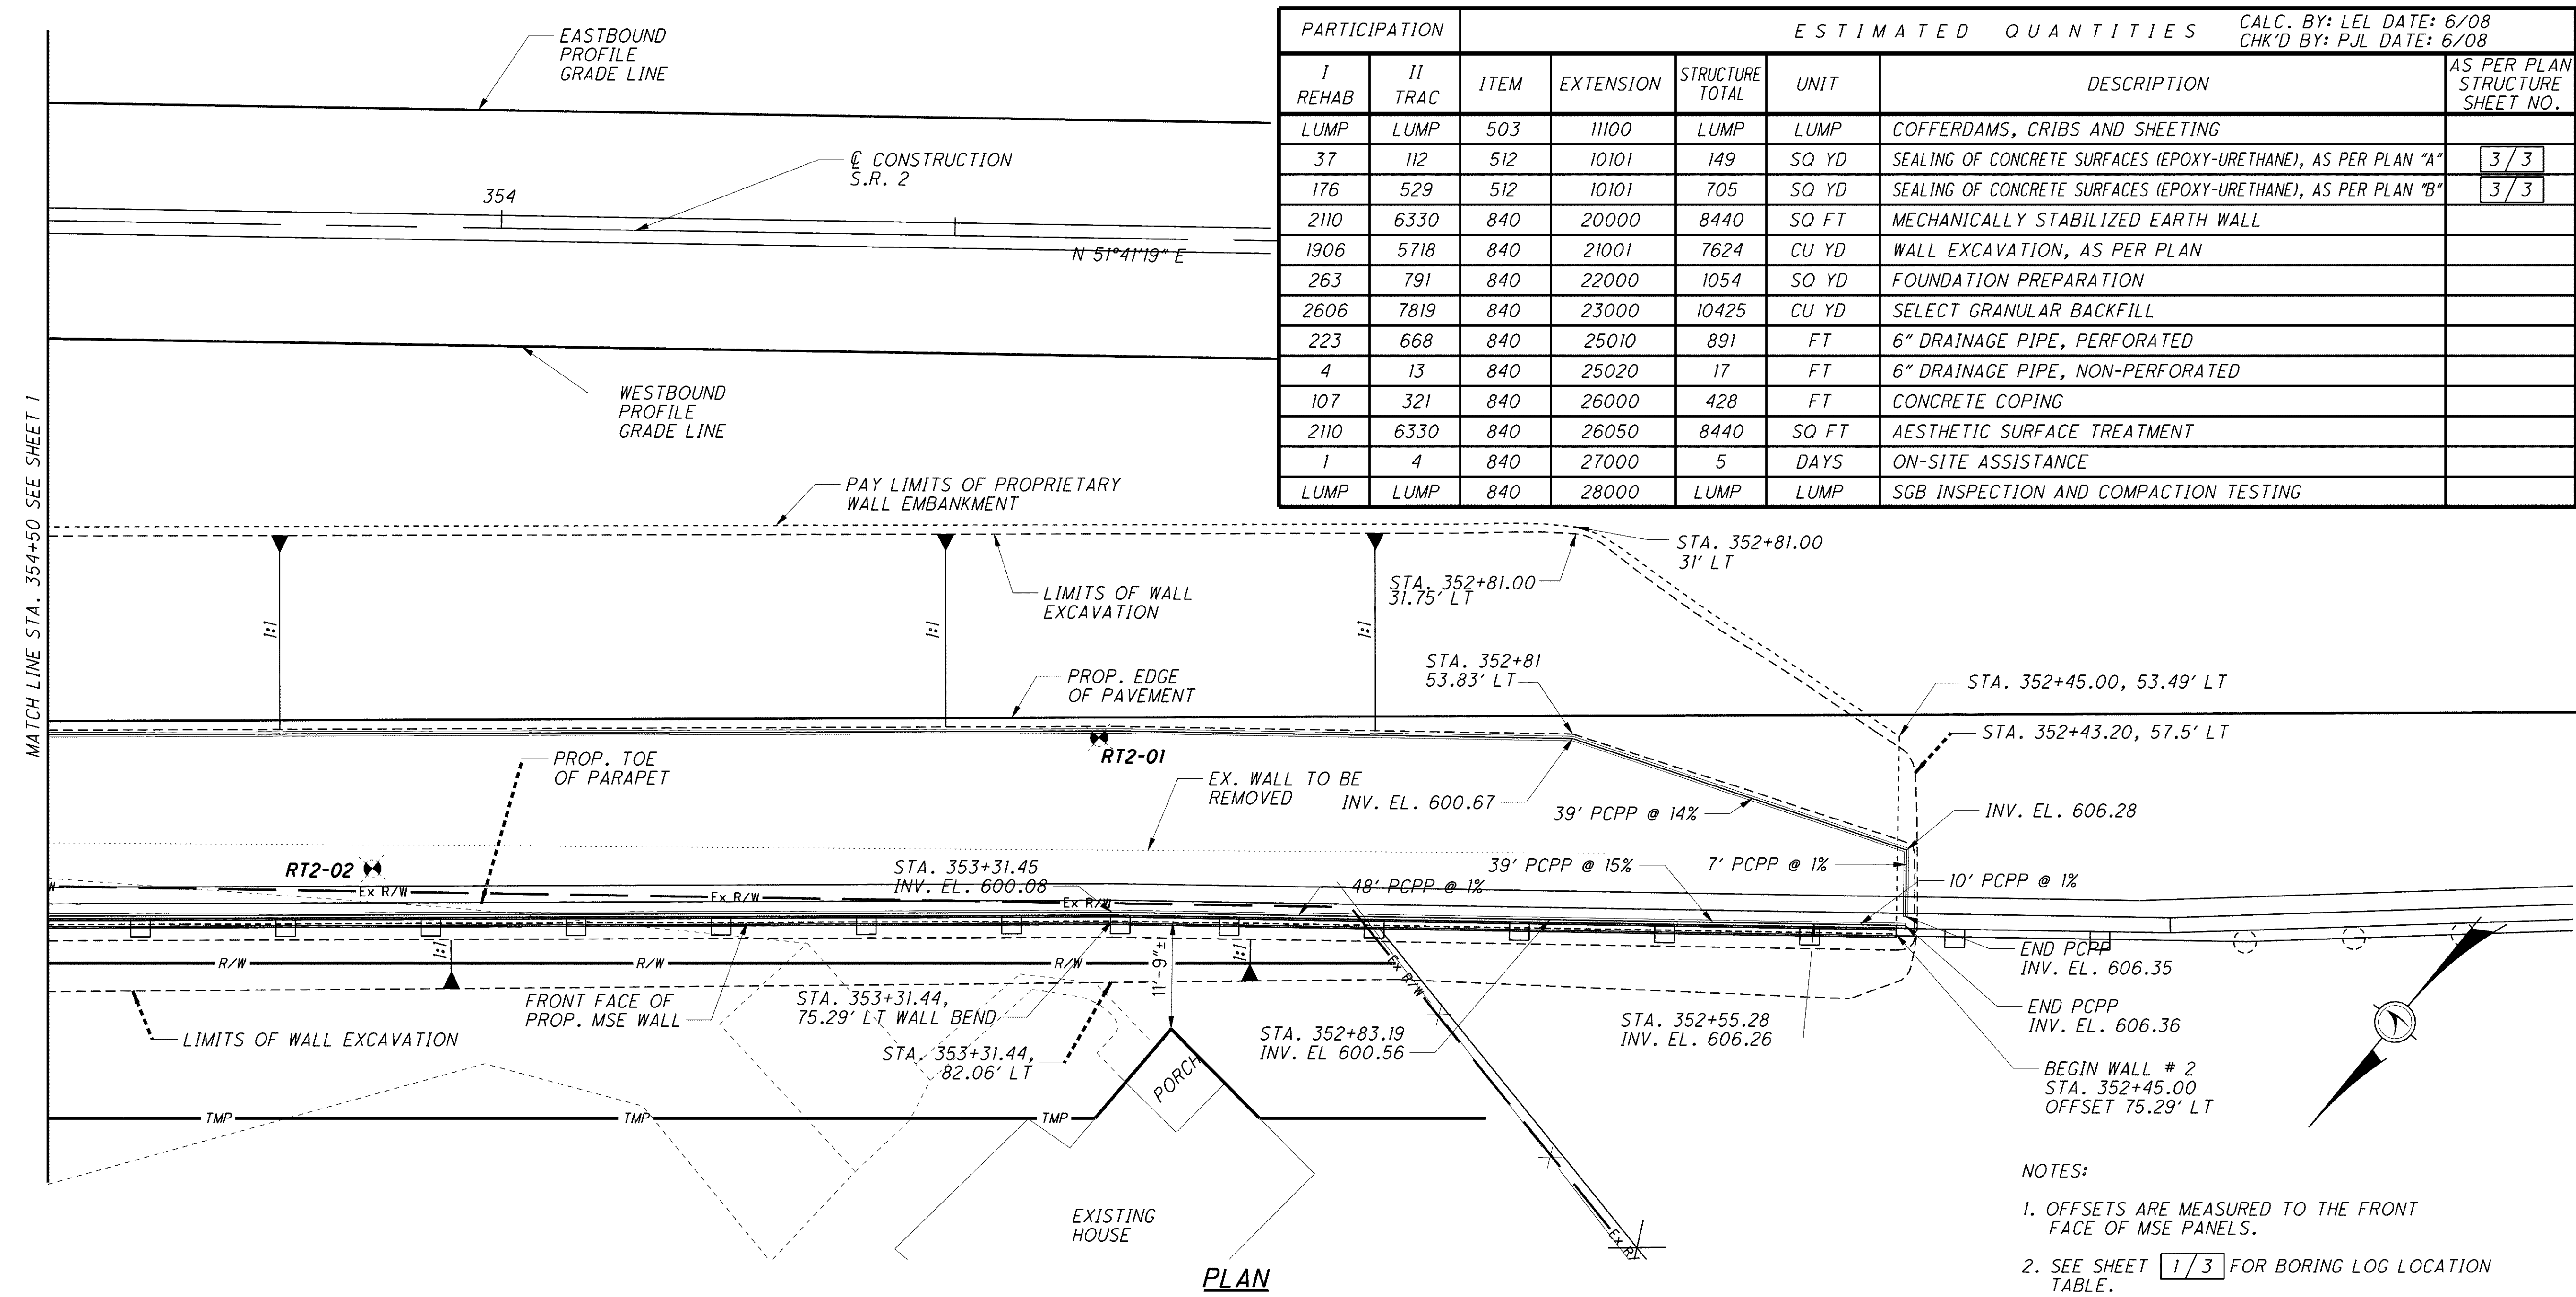

- NOTES:**
1. OFFSETS ARE MEASURED TO THE FRONT FACE OF MSE PANELS.
 2. SEE SHEET 1/3 FOR BORING LOG LOCATION TABLE.

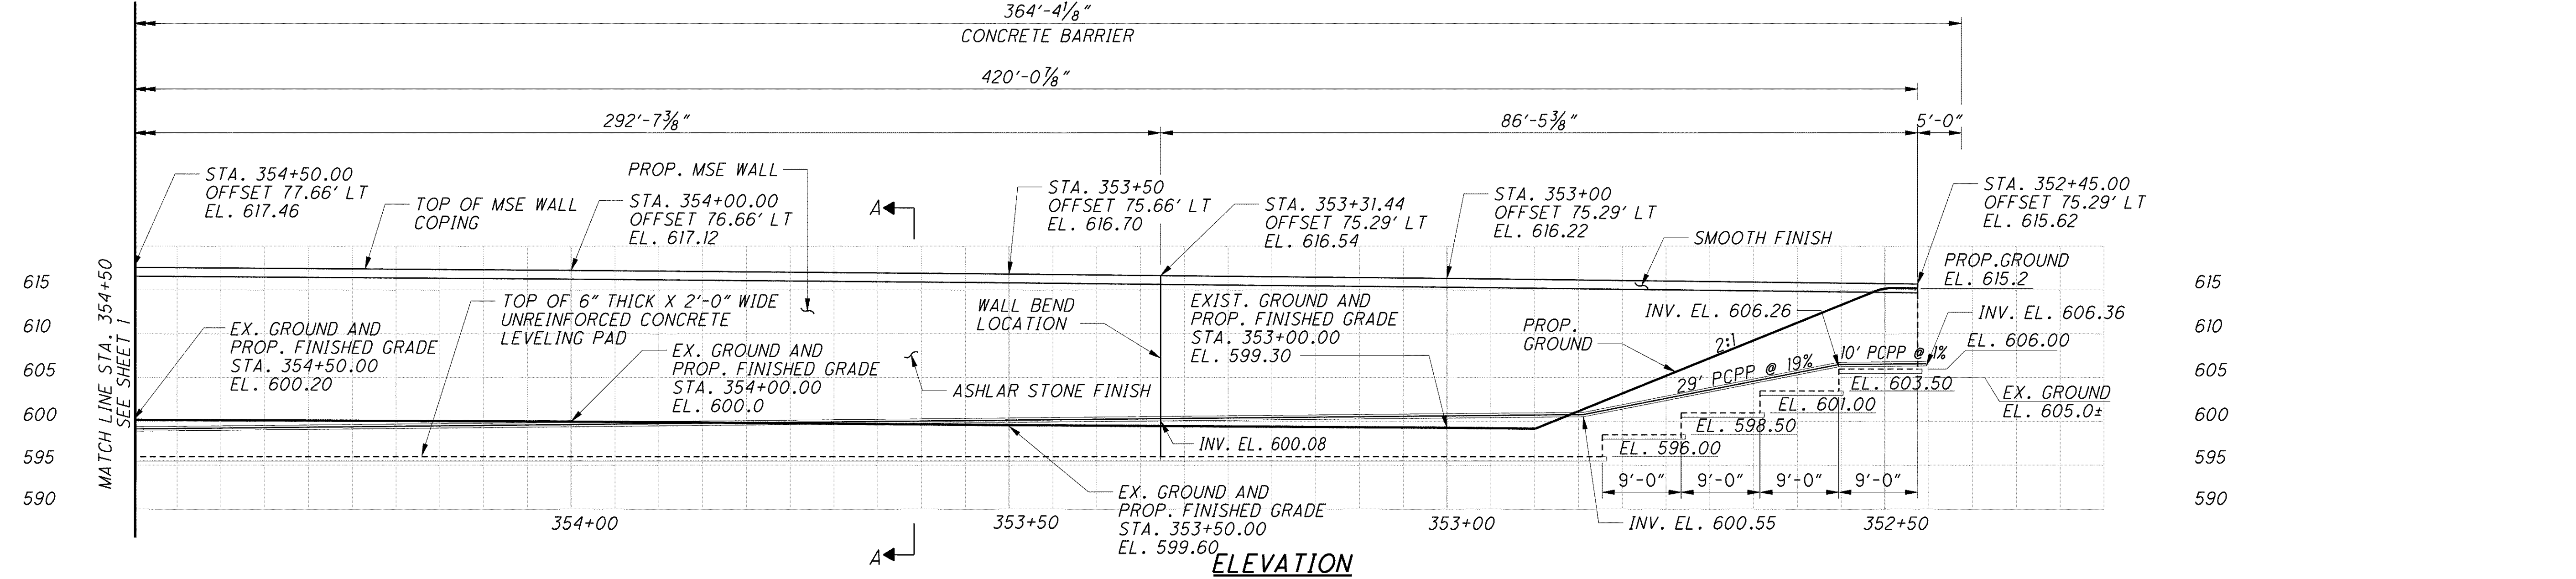

DESIGN AGENCY: **PARSONS BRINCKERHOFF OUADE & DOUGLAS, INC.**
614 W. SUPERIOR AVE., SUITE 400
CLEVELAND, OHIO 44113

DATE: 7/7/07
REVIEWED: RJO
DRAWN: BKJ
DESIGNED: BMG
CHECKED: P.JL

RETAINING WALL #2
PLAN & ELEVATION 2 OF 2

LAK-2-3.32
PID No. 13486

2 / 3

955
1679

G:\Project\lak\13486\structures\wall_002\sheets\13486_002GM002.dgn 8/7/2008 2:45:44 PM djozity