


j:\LAK\13486\bridge\LAK002_0400C\sheets\02_0400CRL005.dgn 03-JUL-2008 2:03PM lintn

REINFORCING SCHEDULE

MARK	LEFT BRIDGE	RIGHT BRIDGE	TOTAL REQ'D	LENGTH	TYPE	DIMENSIONS						LEFT BRIDGE WT.(LBS.)	RIGHT BRIDGE WT.(LBS.)	TOTAL WEIGHT (LBS.)		
						A	B	C	D	E	RAD.				INC.	
* APPROACH SLAB																
AS501	520	520	1040	30'-0"	STR.								16271	16271	32542	
AS502	65	65	130	16'-3"	STR.								1102	1102	2204	
AS503	65	65	130	10'-10"	STR.								734	734	1468	
AS504	65	65	130	11'-3"	STR.								763	763	1526	
AS505	141	142	283	29'-6"	STR.								4338	4369	8707	
AS506	67	65	132	17'-9"	STR.								1240	1203	2443	
AS507	SER.	SER.	SER.	TO	STR.								0'-1 3/4"	155	311	466
	5	5	5	29'-6"												
	1	2	3	30'-7"												
AS508	SER.	SER.	SER.	TO	STR.								0'-2"	161	322	483
	5	5	5	31'-3"												
	1		1	30'-8"												
AS509	SER.		SER.	TO	STR.								0'-2"	158		158
	5		5	30'-0"												
	1		1	31'-8"												
AS510	SER.		SER.	TO	STR.								0'-2"	163		163
	5		5	31'-0"												
AS511	6	12	18	18'-10"	STR.								118	236	354	
AS512	6		6	19'-6"	STR.								122		122	
AS513	16	16	32	10'-0"	STR.								167	167	334	
AS514	6	6	12	5'-6"	25	1'-8"	2'-5"	1'-4"	0'-1 1/2"	0'-5"			34	34	68	
AS515	10	10	20	5'-6"	STR.								57	57	114	
AS516	33	32	65	7'-5"	23	1'-1"	3'-2"	3'-0"	0'-5 1/4"	0'-2 3/4"			255	248	503	
AS517	62	62	124	9'-11"	23	1'-1"	4'-5"	4'-3"	0'-5 1/4"	0'-2 1/4"			641	641	1282	
AS601	2	2	4	29'-7"	STR.								89	89	178	
AS602	1	2	3	18'-9"	19	15'-9"	3'-0"	0'-3"					28	56	84	
AS603	1		1	19'-4"	19	16'-4"	3'-0"	0'-3"					29		29	
	4	4	8	5'-2"			4'-4"									
AS604	SER.	SER.	SER.	TO	1	1'-0"	TO						0'-1"	288	288	576
	10	10	10	4'-5"			3'-7"									
AS605	20	20	40	4'-4"	1	1'-0"	3'-6"						130	130	260	
AS606	95	94	189	3'-8"	1	1'-0"	2'-10"						523	518	1041	
AS607	33	32	65	3'-6"	30	0'-10"	1'-11"	1'-1"	0'-4 3/8"				173	168	341	
AS608	30	30	60	4'-0"	34	2'-0"	1'-0"	1'-0"	0'-2 1/4"				180	180	360	
AS609	62	62	124	3'-4"	33								310	310	620	
AS610	4	4	8	1'-10"	35	0'-3"	1'-0"	1'-0"					11	11	22	
AS611	12	12	24	7'-1"	1	4'-3"	3'-0"						128	128	256	
AS612	62	62	124	4'-10"	30	0'-10"	3'-2"	1'-1"	0'-7 1/4"				450	450	900	
AS613	2	2	4	3'-4"	STR.								10	10	20	
AS1001	349	350	699	30'-11"	16	29'-6"							46429	46562	92991	
AS1002	3		3	31'-6"	16	30'-1"							407		407	
APPROACH SLAB TOTAL												75,665	75,358	151,023		

* FOR INFORMATION ONLY. COST OF APPROACH SLAB REINFORCING INCLUDED WITH ITEM 526, REINFORCING CONCRETE APPROACH SLABS (T = 17"), AS PER PLAN

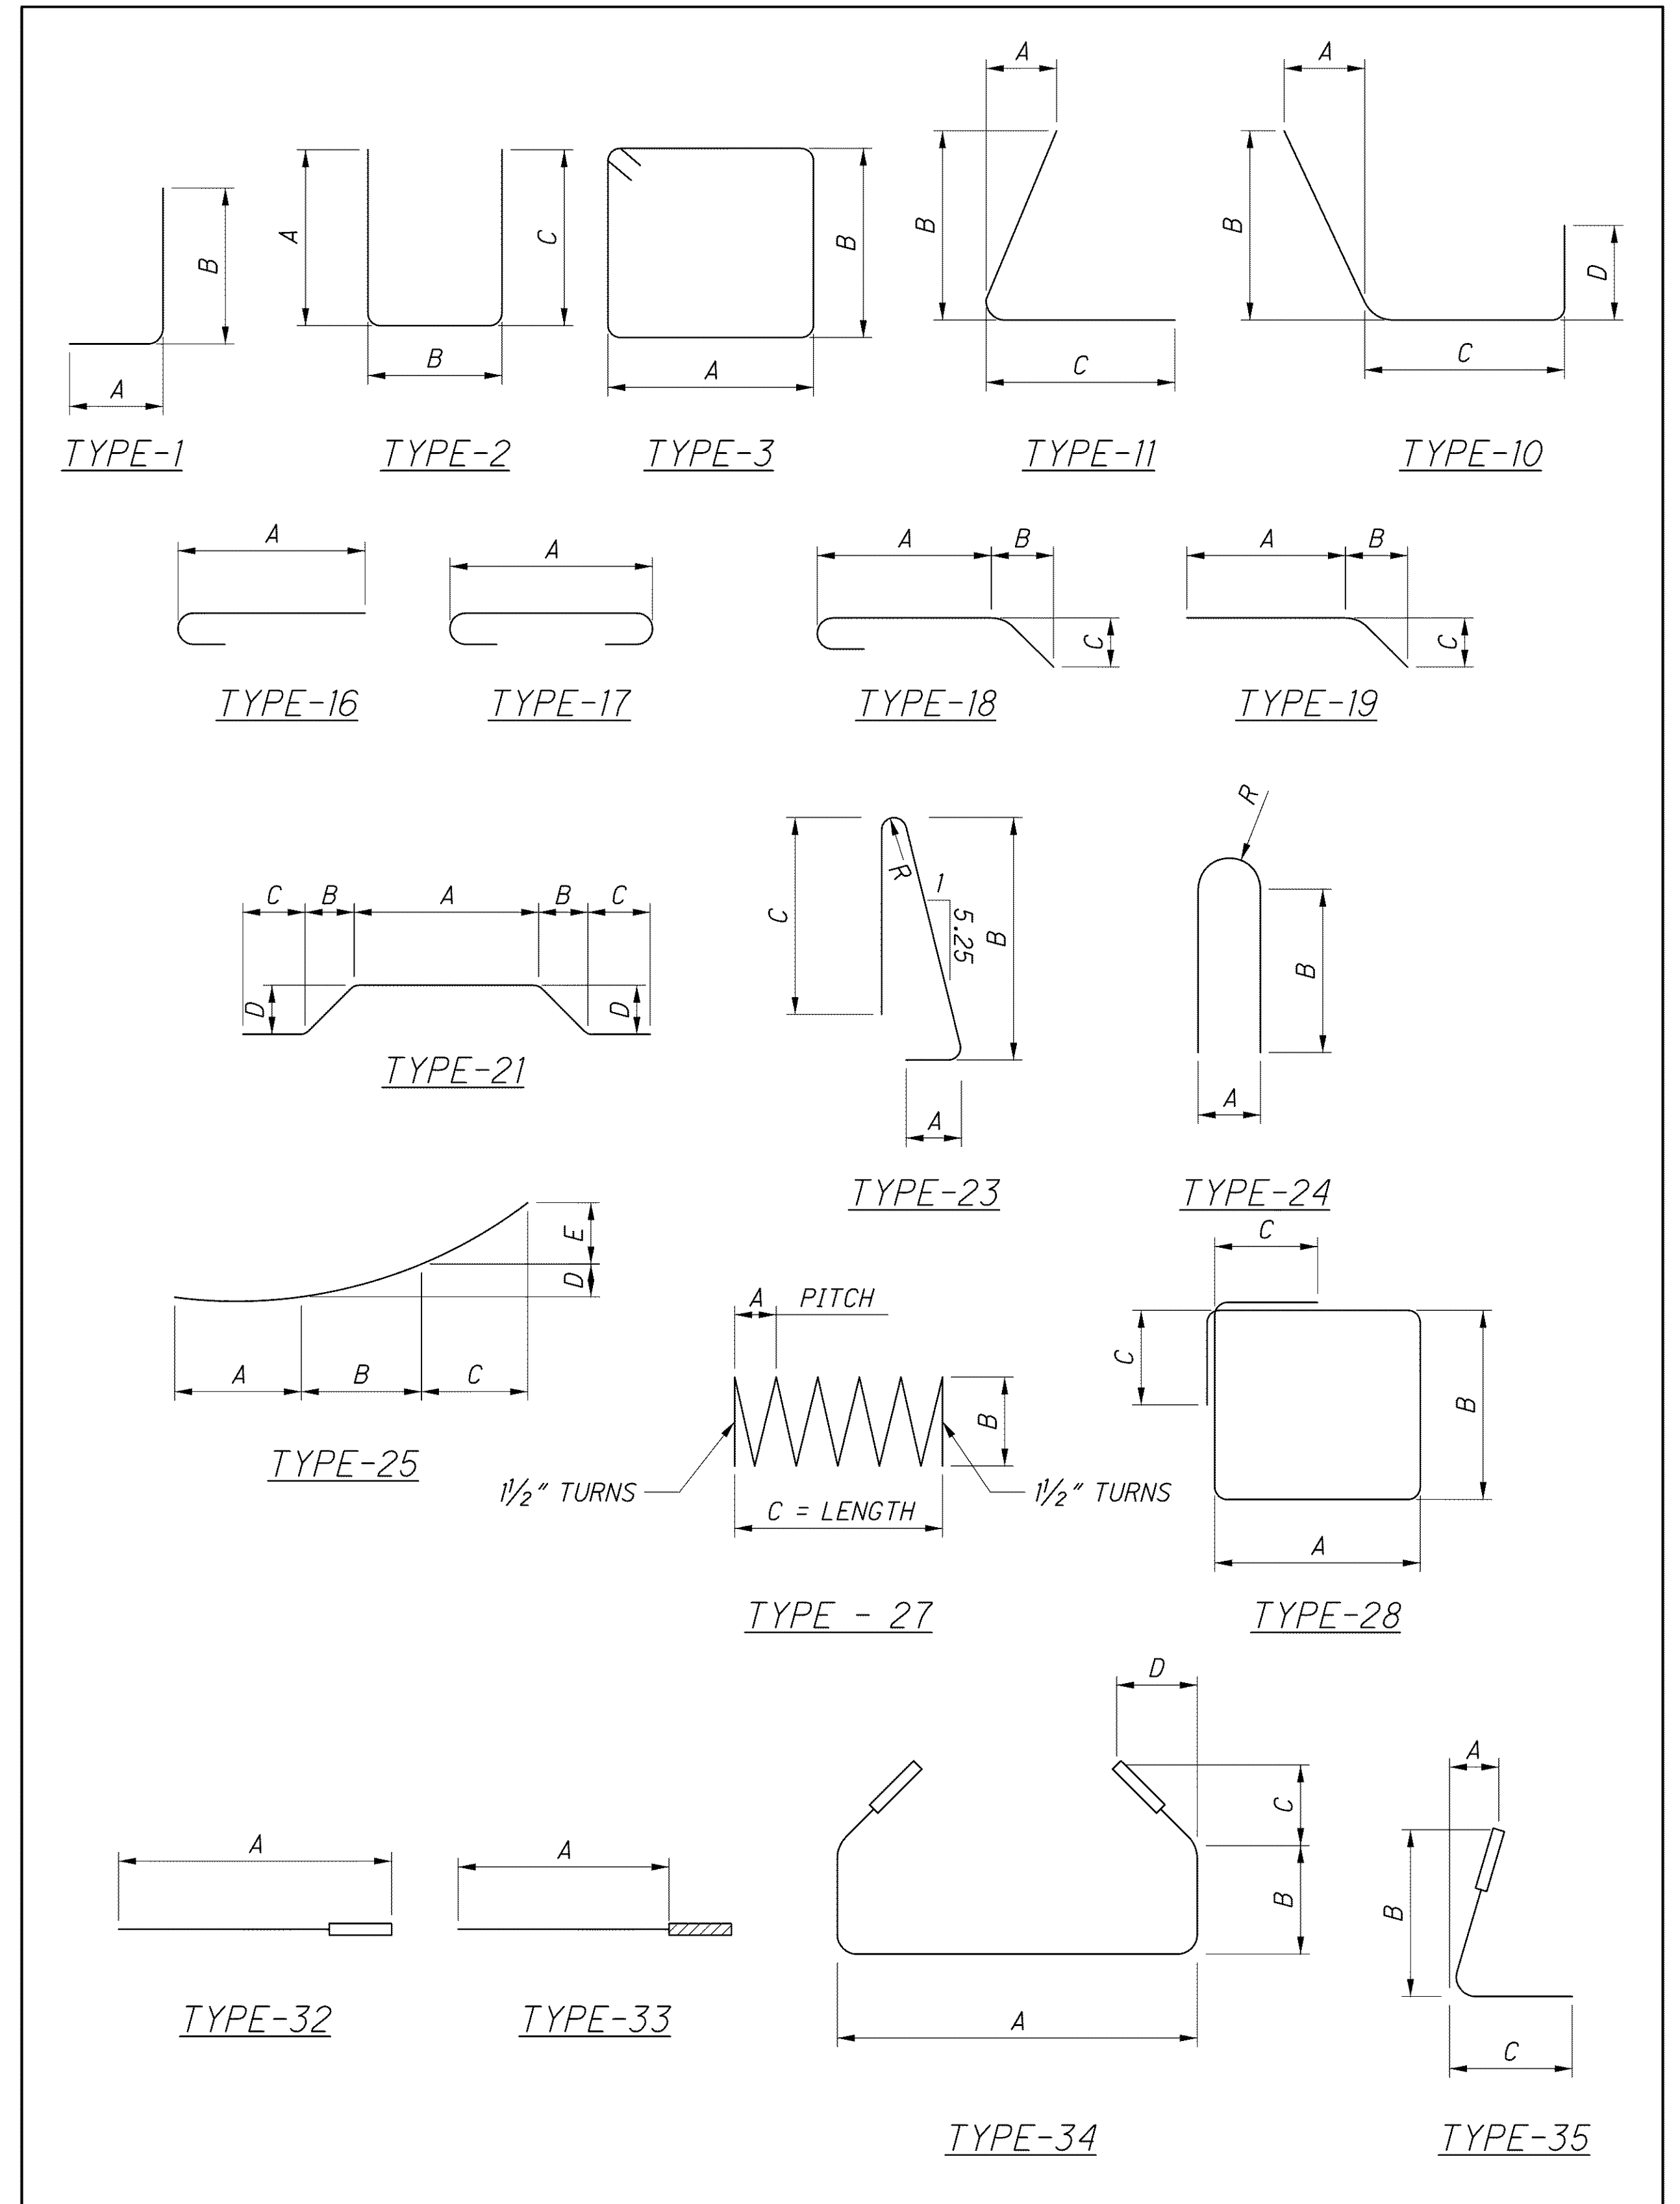

NOTE:
FOR NOTES AND ABBREVIATIONS, SEE SHEET 63/67.