


J:\LAK\13486\bridge\LAK002_0486C\sheets\02_0486CFP002.dgn 03-JUL-2008 1:39PM lintn

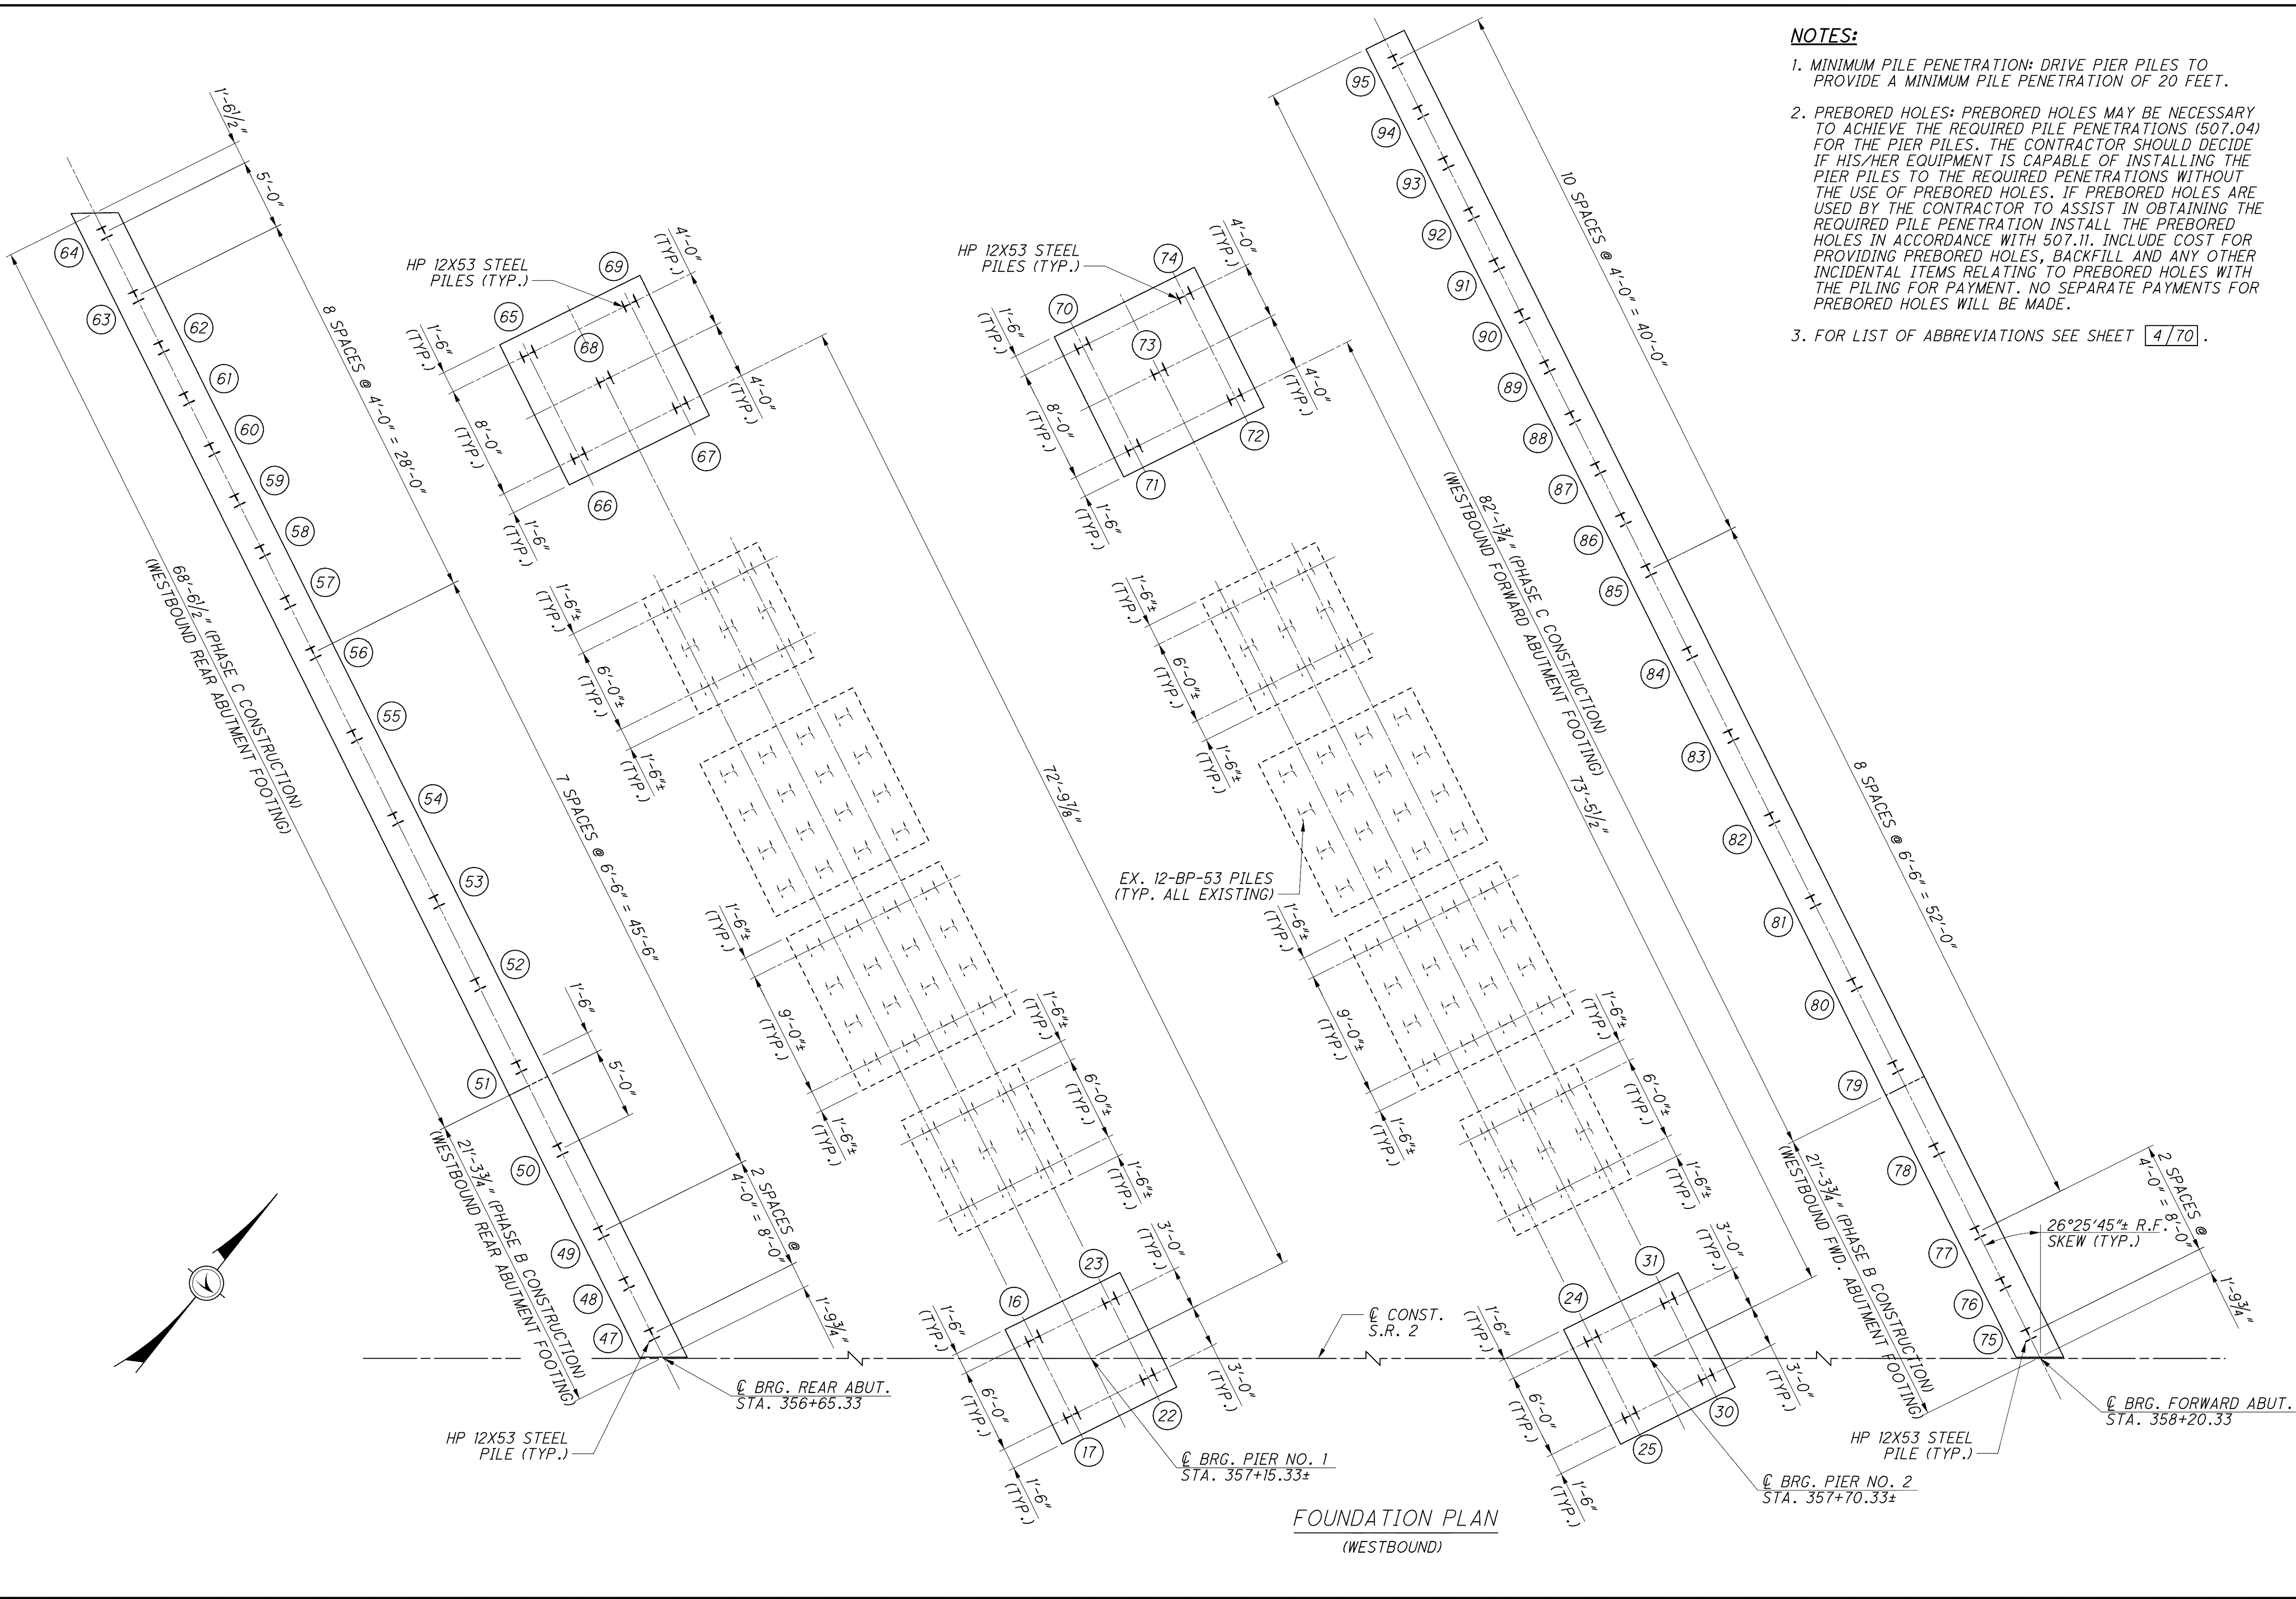

- NOTES:**
1. MINIMUM PILE PENETRATION: DRIVE PIER PILES TO PROVIDE A MINIMUM PILE PENETRATION OF 20 FEET.
 2. PREBORED HOLES: PREBORED HOLES MAY BE NECESSARY TO ACHIEVE THE REQUIRED PILE PENETRATIONS (507.04) FOR THE PIER PILES. THE CONTRACTOR SHOULD DECIDE IF HIS/HER EQUIPMENT IS CAPABLE OF INSTALLING THE PIER PILES TO THE REQUIRED PENETRATIONS WITHOUT THE USE OF PREBORED HOLES. IF PREBORED HOLES ARE USED BY THE CONTRACTOR TO ASSIST IN OBTAINING THE REQUIRED PILE PENETRATION INSTALL THE PREBORED HOLES IN ACCORDANCE WITH 507.11. INCLUDE COST FOR PROVIDING PREBORED HOLES, BACKFILL AND ANY OTHER INCIDENTAL ITEMS RELATING TO PREBORED HOLES WITH THE PILING FOR PAYMENT. NO SEPARATE PAYMENTS FOR PREBORED HOLES WILL BE MADE.
 3. FOR LIST OF ABBREVIATIONS SEE SHEET 4/70.

FOUNDATION PLAN
(WESTBOUND)

DESIGN AGENCY		DATE	6-19-08
PARSONS BRINCKERHOFF QUADE & DOUGLAS, INC. 614 W. SUPERIOR AVE., SUITE 400 CLEVELAND, OHIO 44113		REVIEWED	RJO
DRAWN		LEL	REVIS
DESIGNED		P.JL	CHECKED
WESTBOUND FOUNDATION LAYOUT PLAN		EBS	
BRIDGE NO. LAK-2-0486 L&R		STRUCTURE FILE NUMBER	4300696 (L) 4300726 (R)
STATE ROUTE 2 OVER ERIE ROAD			
LAK-2-3.32			
PID No. 13486			
16 / 70			
1408			
1679			