



SCHEMATIC LAYOUT PLAN

FED. RD. DIVISION	STATE	PROJECT	14 297
2	OHIO	F-U-UG-329 (15)	

LAKE COUNTY
LAK-2-4.42

LIGHTS, SIGNS & BARRICADES
 The Contractor shall, in addition to the general requirements of Sec. G-7.07 on this project perform the following:

- (a) Provide, erect and maintain movable gates on intersecting roads closed to traffic at all points where local traffic movement terminates.
- (b) Provide, erect and maintain lights, signs & barricades at the work limits on all intersecting roads which remain open to traffic.
- (c) Provide, erect & maintain standard 40"x24" size "Road Closed" signs, sign supports & lights at the following affected locations during periods in which the affected roads are closed to traffic:
 1. On Stevens Blvd. at E. 364th St.
 2. On Stevens Blvd. at Center St.
 3. On Ben Hur Ave. at Vine St. (S.R. 640)
 Lights, barricades, and danger and warning signs shall be provided at locations shown in accordance with Sec. G-7.07. Barricades and gates shall be as detailed on Standard Construction Drawing No. G-7.07. Sign supports and lights for "Road Closed" signs shall be as detailed in the "Ohio Manual of Uniform Traffic Control Devices."
 Payment for providing, erecting, maintaining and removing barricades, gates, lights, signs & sign supports shall be included in the lump sum price bid for "Maintaining Traffic."

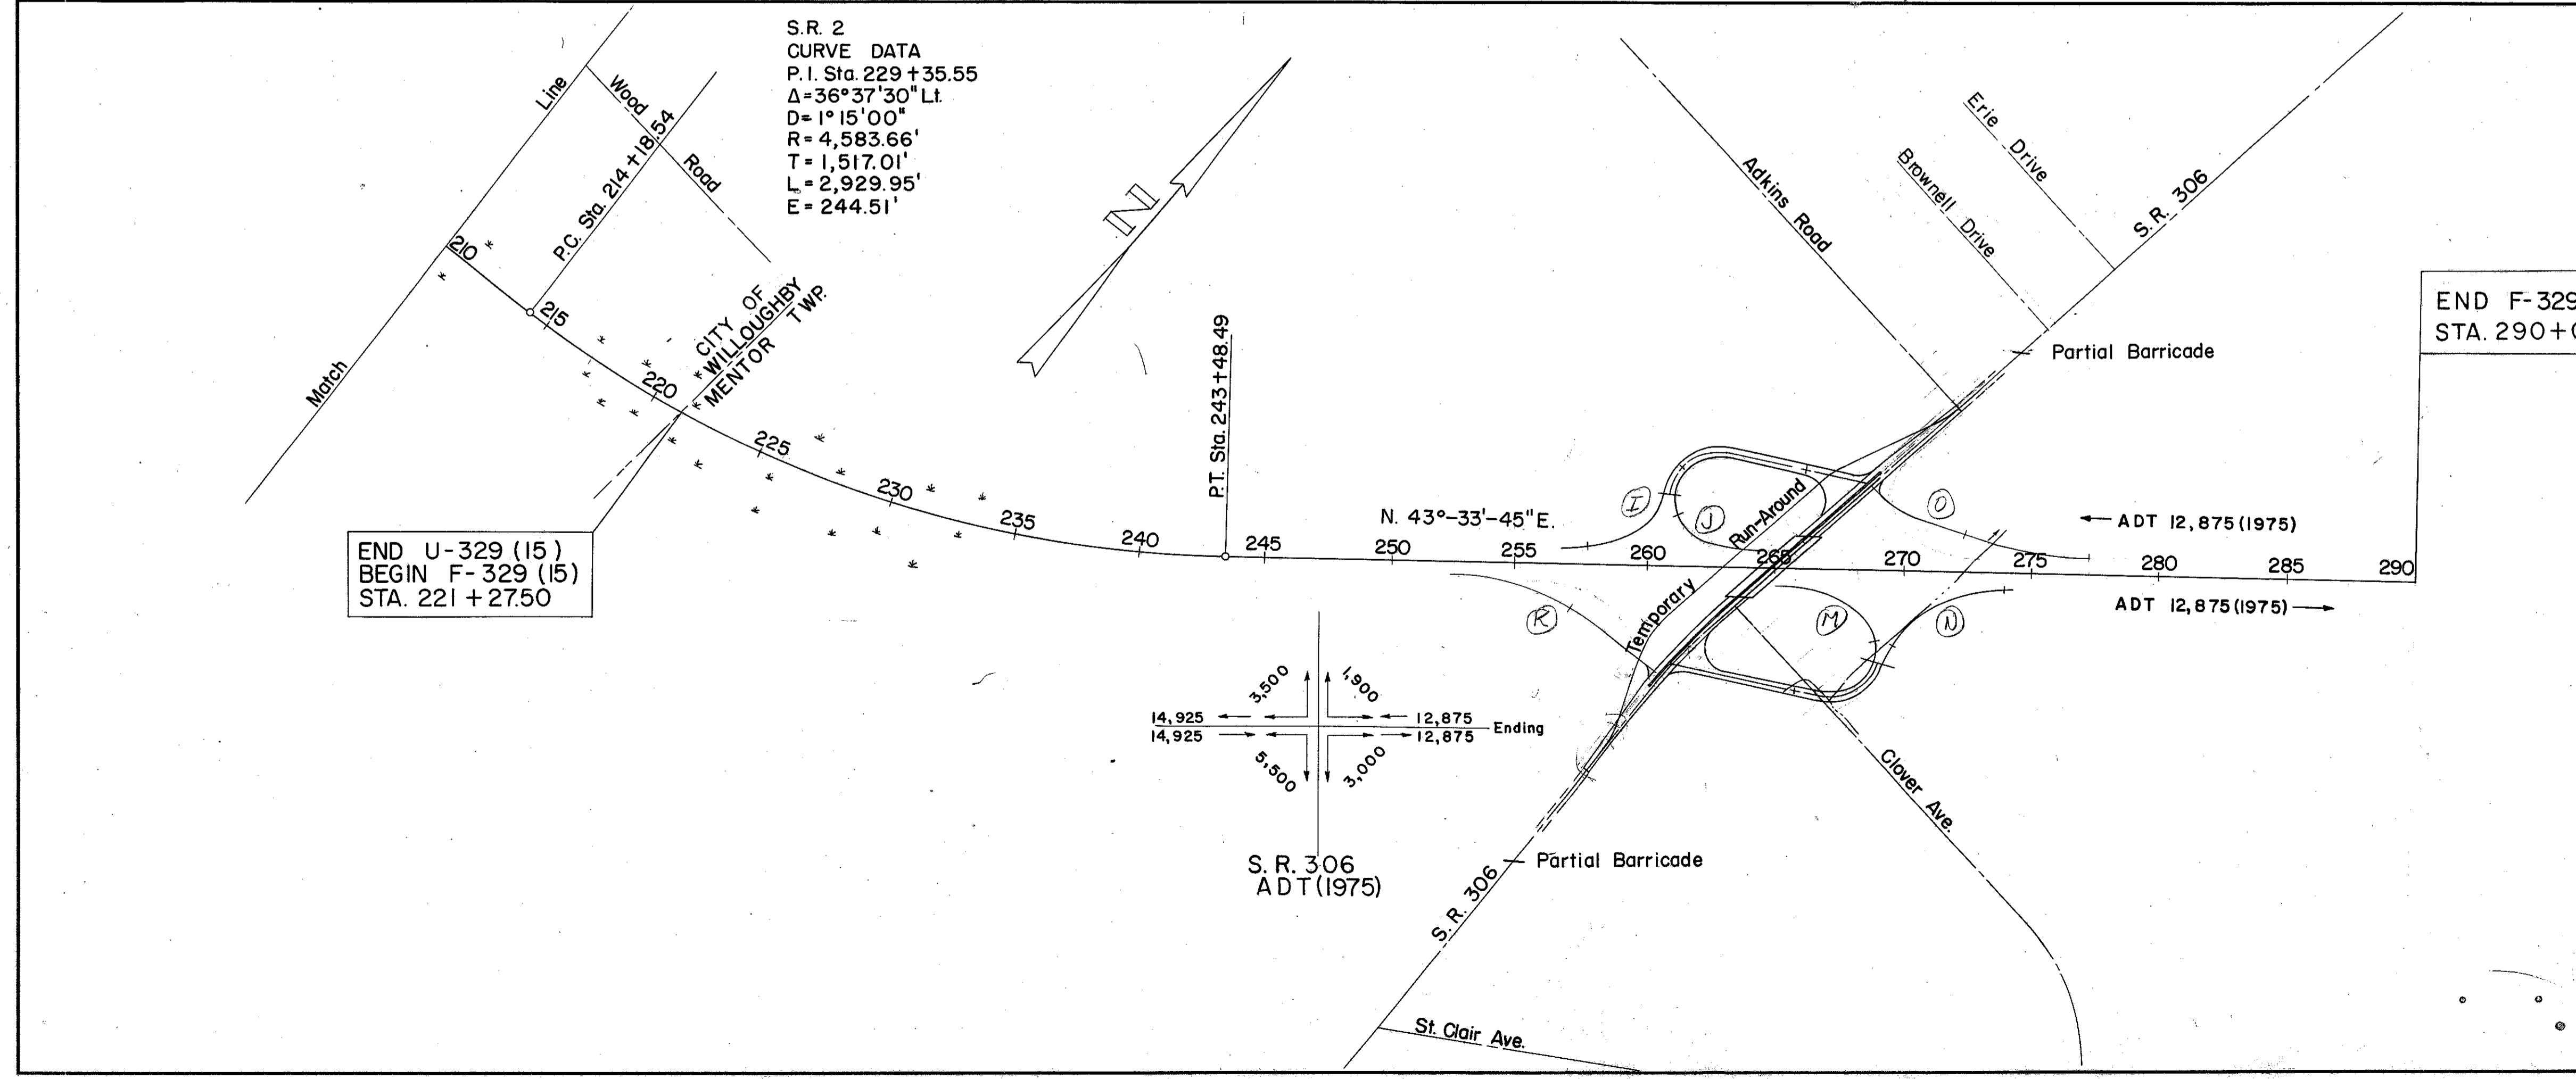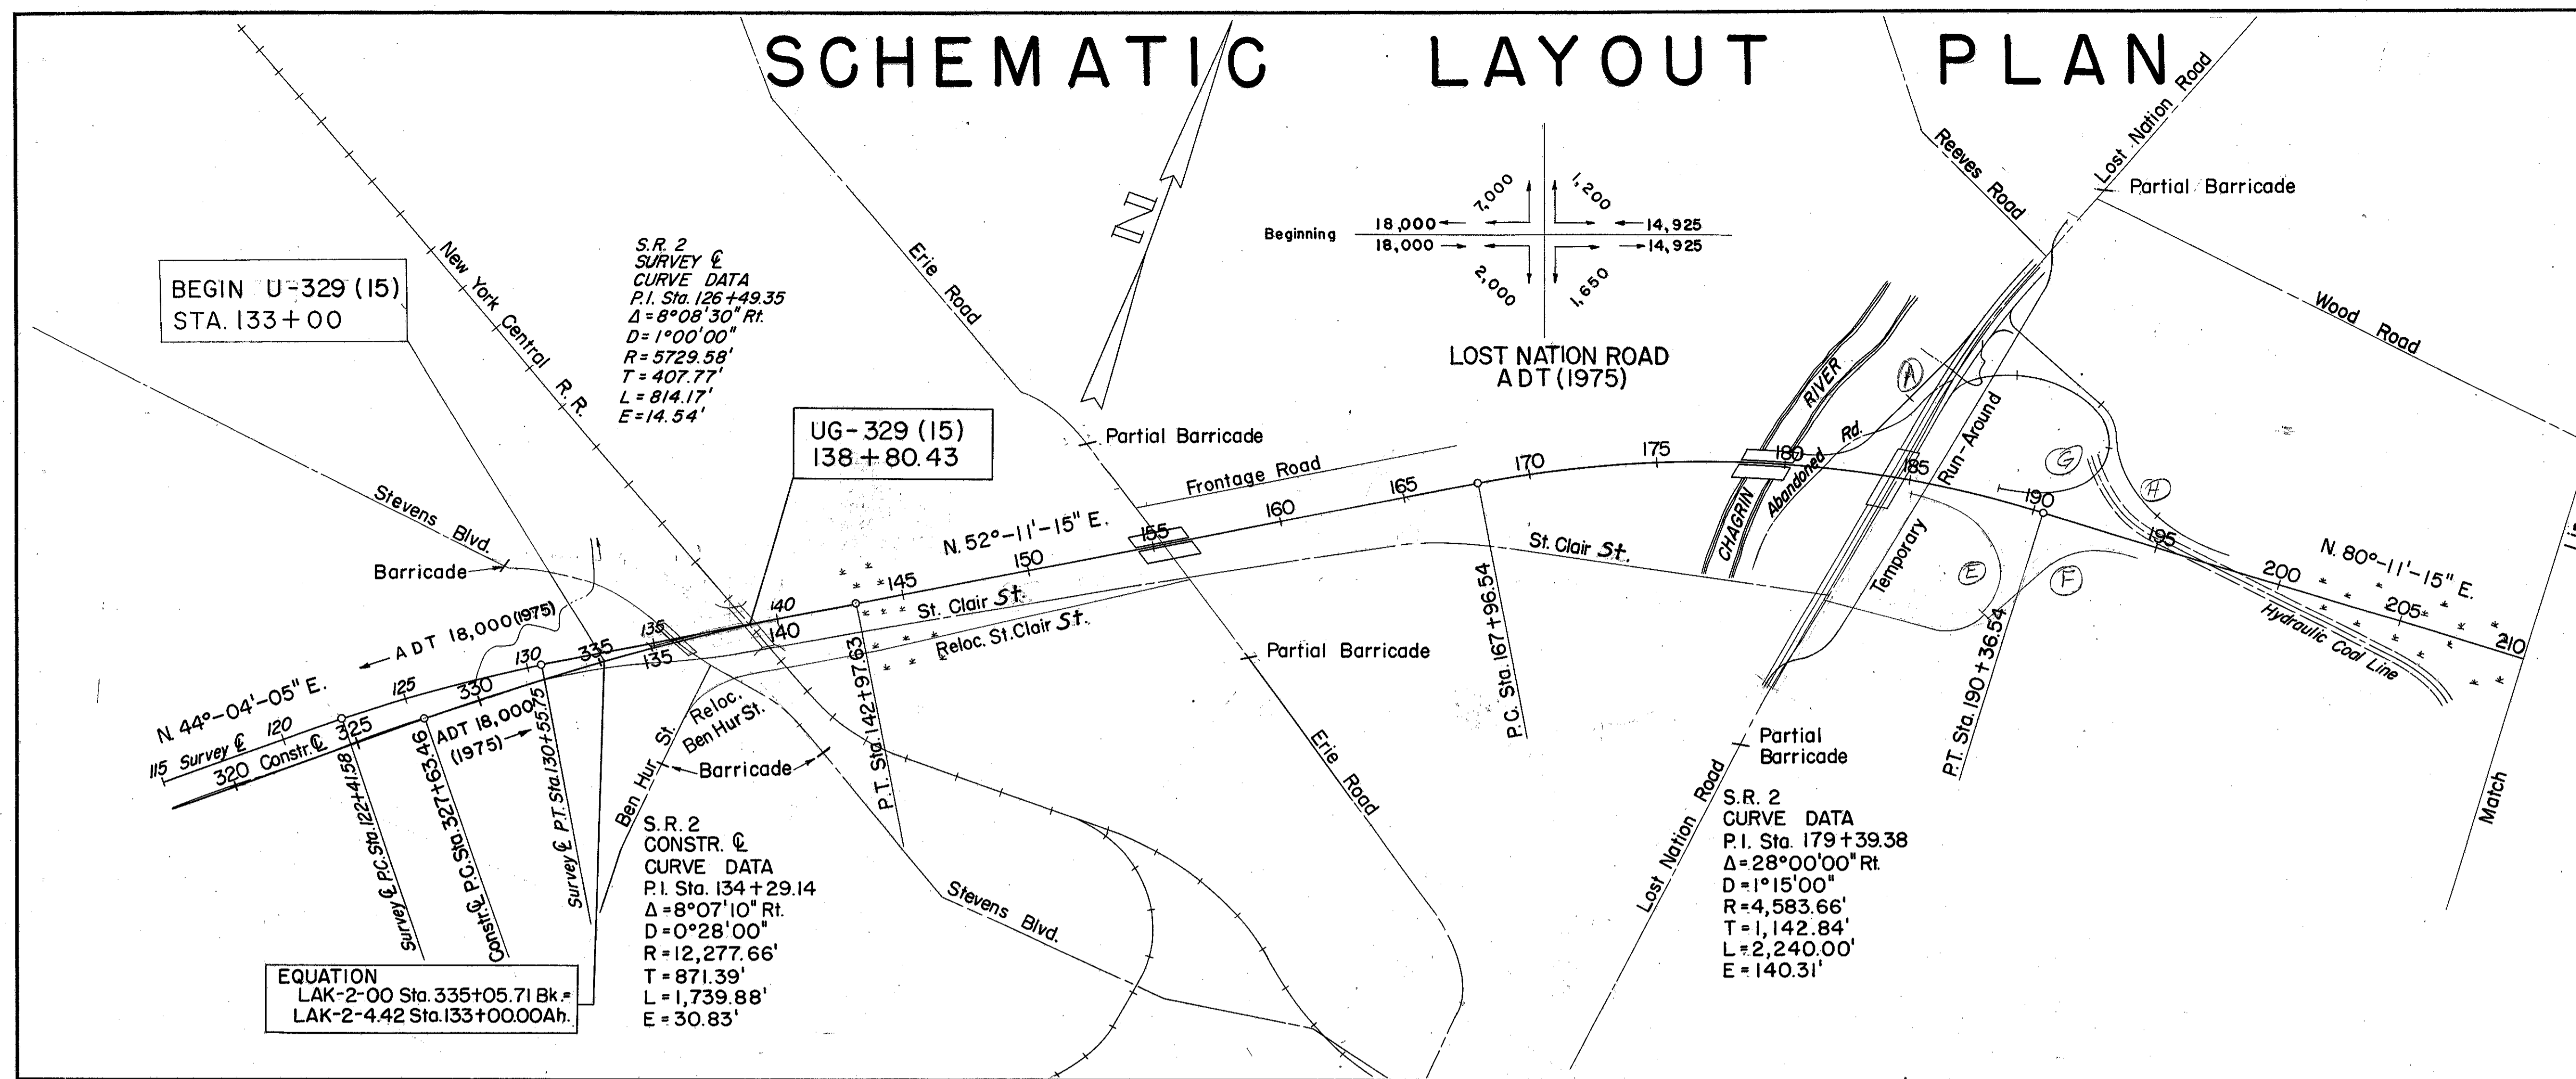

The Contractor shall provide and maintain lights, signs and/or signals at all points where local traffic movement terminates from the intersection of the project on the schematic layout, during the period the local roads are closed for reconstruction. Barricades, gates and movable gates shall be 40"x24" size and shall be in accordance with the Ohio Manual of Uniform Traffic Control Drawing No. G-7.07. Payment for providing, erecting, maintaining and removing lights, signs and sign supports shall be included in the lump sum price bid for "Maintaining Traffic."

Scale: 1" = 400'