


STA. 0+00 OF F.A.P. 519-G  
= STA. 0+00 OF F.A.P. 519-G(2)

FED. RD. DIST. NO.	STATE	F.A.P. NO.	FISCAL YEAR
10	OHIO	519-G(2) 277(2)	1939

4  
12

LAKE COUNTY  
S.H.2 SEC. WICKLIFFE, WILLOWICK,  
I.B. & WILLOUGHBY (PT.)  
ROADSIDE IMPROVEMENT

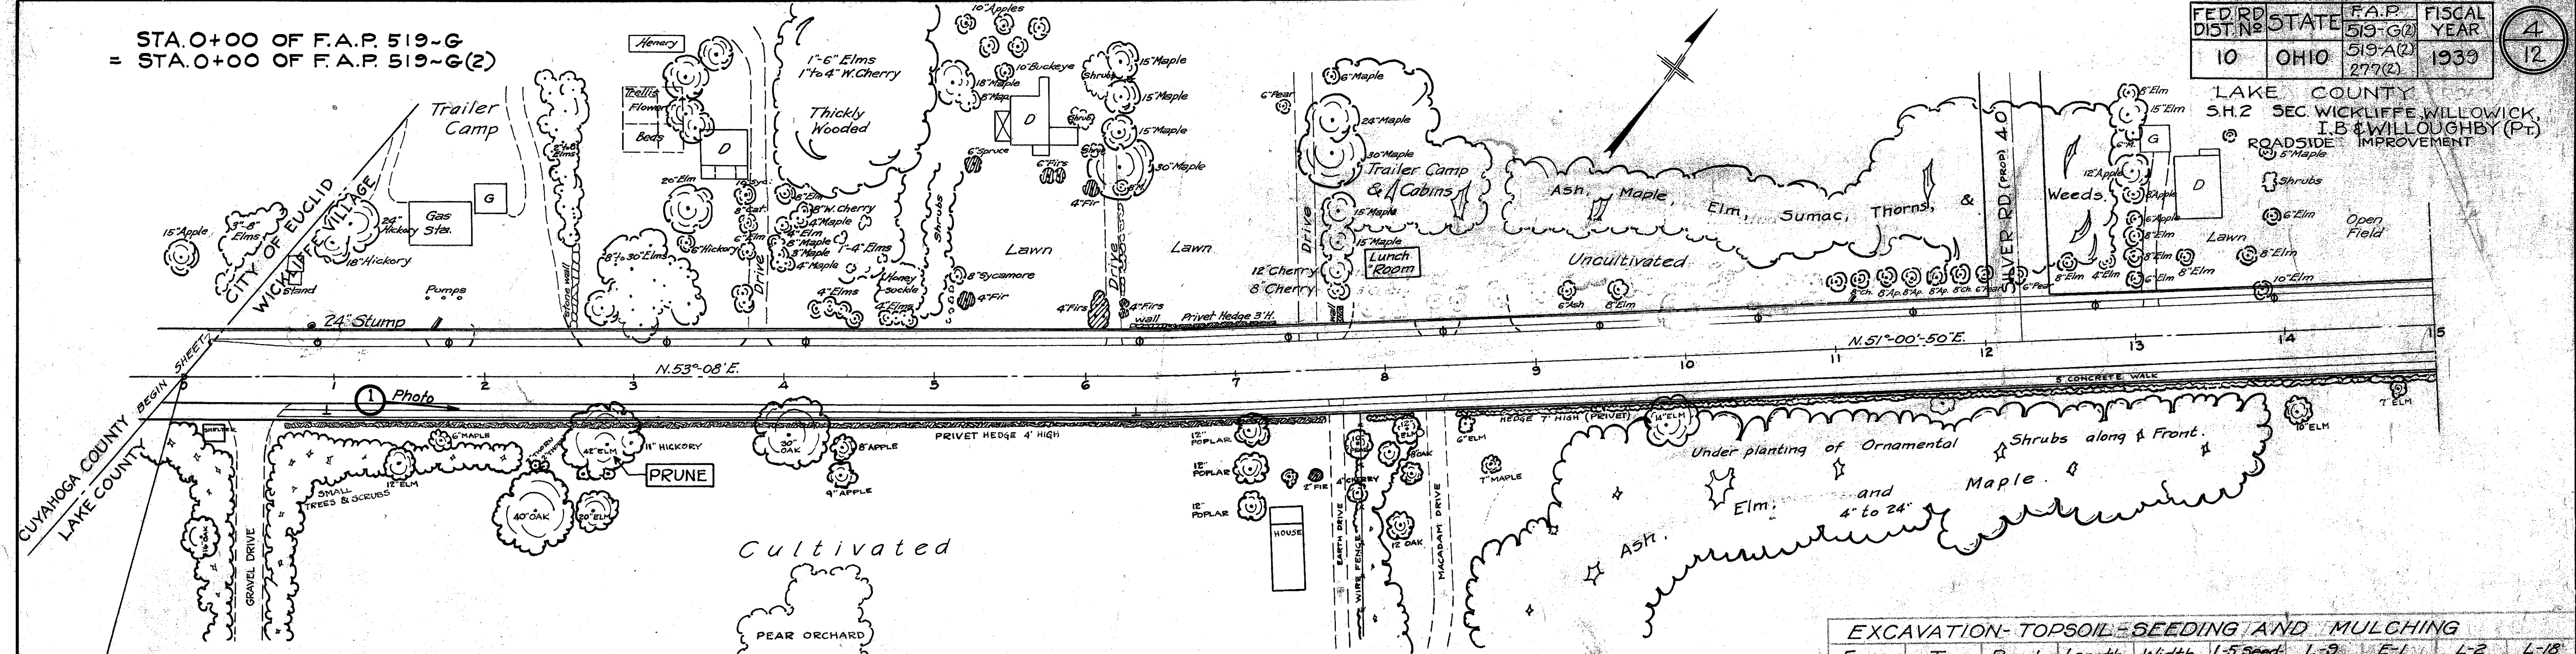

STA. 0+00  
BEGIN F.A.P. 519-G(2)

QUANTITIES FOR SHEET NO 4 F.A.P. 519-G(2)

Item	Quantity	Unit	Materials & Operations	Condition	Sizes Caliper (Inches) Height (Feet)	Spacing
L-14	5	Each	Acer saccharum (Sugar Maple)		1 1/2 to 1 3/4	as shown
E-1	34	Cu. Yds.	Roadway excavation (unclassified)			
L-2	324	Sq. Yds.	Topsoil furnished & placed (areas seeded under item L-9)			
L-9	1047	Sq. Yds.	Seeding			
L-5	1021	Sq. Yds.	Seeding and renovating existing sod			
L-9	190	Lbs.	Commercial fertilizer #1, @ 20 lbs. per 1000 sq. ft.			
L-9	92	Lbs.	Commercial fertilizer #2, @ 10 lbs. per 1000 sq. ft.			
L-18	2068	Sq. Yds.	Straw Mulch (including stabilizing)			
E-9	1	Each	Trees to be removed & stabilized			
L-17	1	Each	Pruning existing trees, 36 inch			

EXCAVATION-TOPSOIL-SEEDING AND MULCHING

From Station	To Station	R or L of E.	Length in ft.	Width in ft.	L-5 Seeding Rod Sq. Yds.	L-9 Seeding Sq. Yds.	E-1 Pkwy Exc. Cu. Yds.	L-2 Topsoil Sq. Yds.	L-18 Mulching Sq. Yds.
0+70	20+40	R	1970	4.5	985				985
3+72	5+00	L	128	3		43	5	43	43
6+30	13+00	L	670	3		224	25	224	224
16+42	18+50	L	208	3	69				69
21+15	29+60	L	845	4.5		422			422
21+19	29+11	R	792	4.5		396			396
18+50	20+50	L	200	3		67	7	67	67
Totals					1054	1152	37	334	2206
Deduct for Side approaches & drives in above sta.					33	105	3	10	138
TOTALS FOR SHEET					1021	1047	34	324	2068

