


FEDERAL AID DISTRICT	STATE	U.S.P.W.H. PROJECT No.	FISCAL YEAR
10	OHIO	NRM 519-F	1935

2A
8

S.H. 2
LAKE

SEC. WILLOUGHBY (PT)
COUNTY

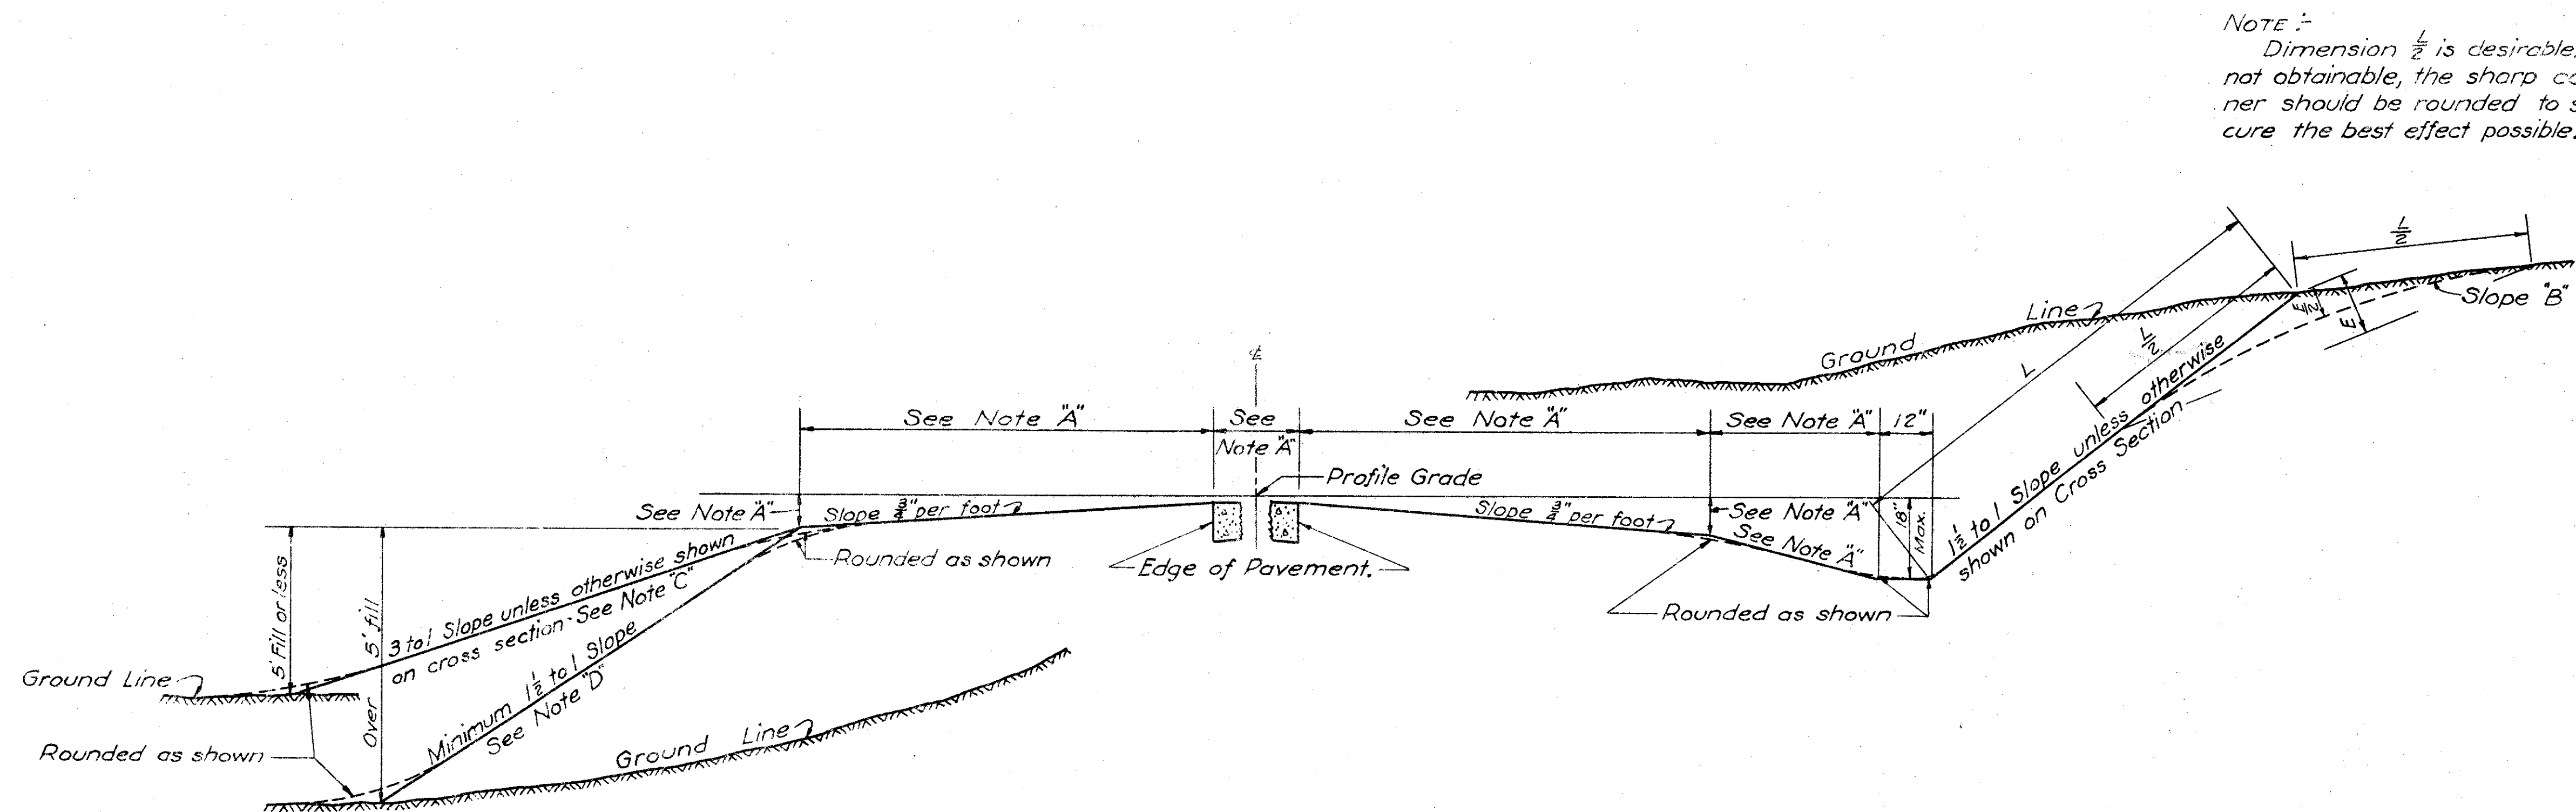

NOTE :-

Solid lines represent Standard Typical Section. Dotted lines represent revised Typical Section to be used as noted.

This section shall be used except where such use would involve prohibitive right of way expenditure.

When excessive right of way is involved, an attempt should be made to get the consent of the property owner to round Slope B to such an extent as will offset slaughting.

The intent of the revised typical section is to secure a more pleasing appearance of the roadway and a section less susceptible to erosion or wash.

The item of trimming or rounding of corners is included in unit price estimated for Item E-5, Finishing Berms, Ditches and Slopes.

NOTE A. Dimensions shown on detailed Typical Section on preceding sheet shall apply.

NOTE C & D. 3 to 1 fill slopes shall be used except where such use involves prohibitive Right of Way expenditure. Where expensive Right of Way is involved, the 3 to 1 slopes shall be modified to carry fill to the present Right of Way line.