
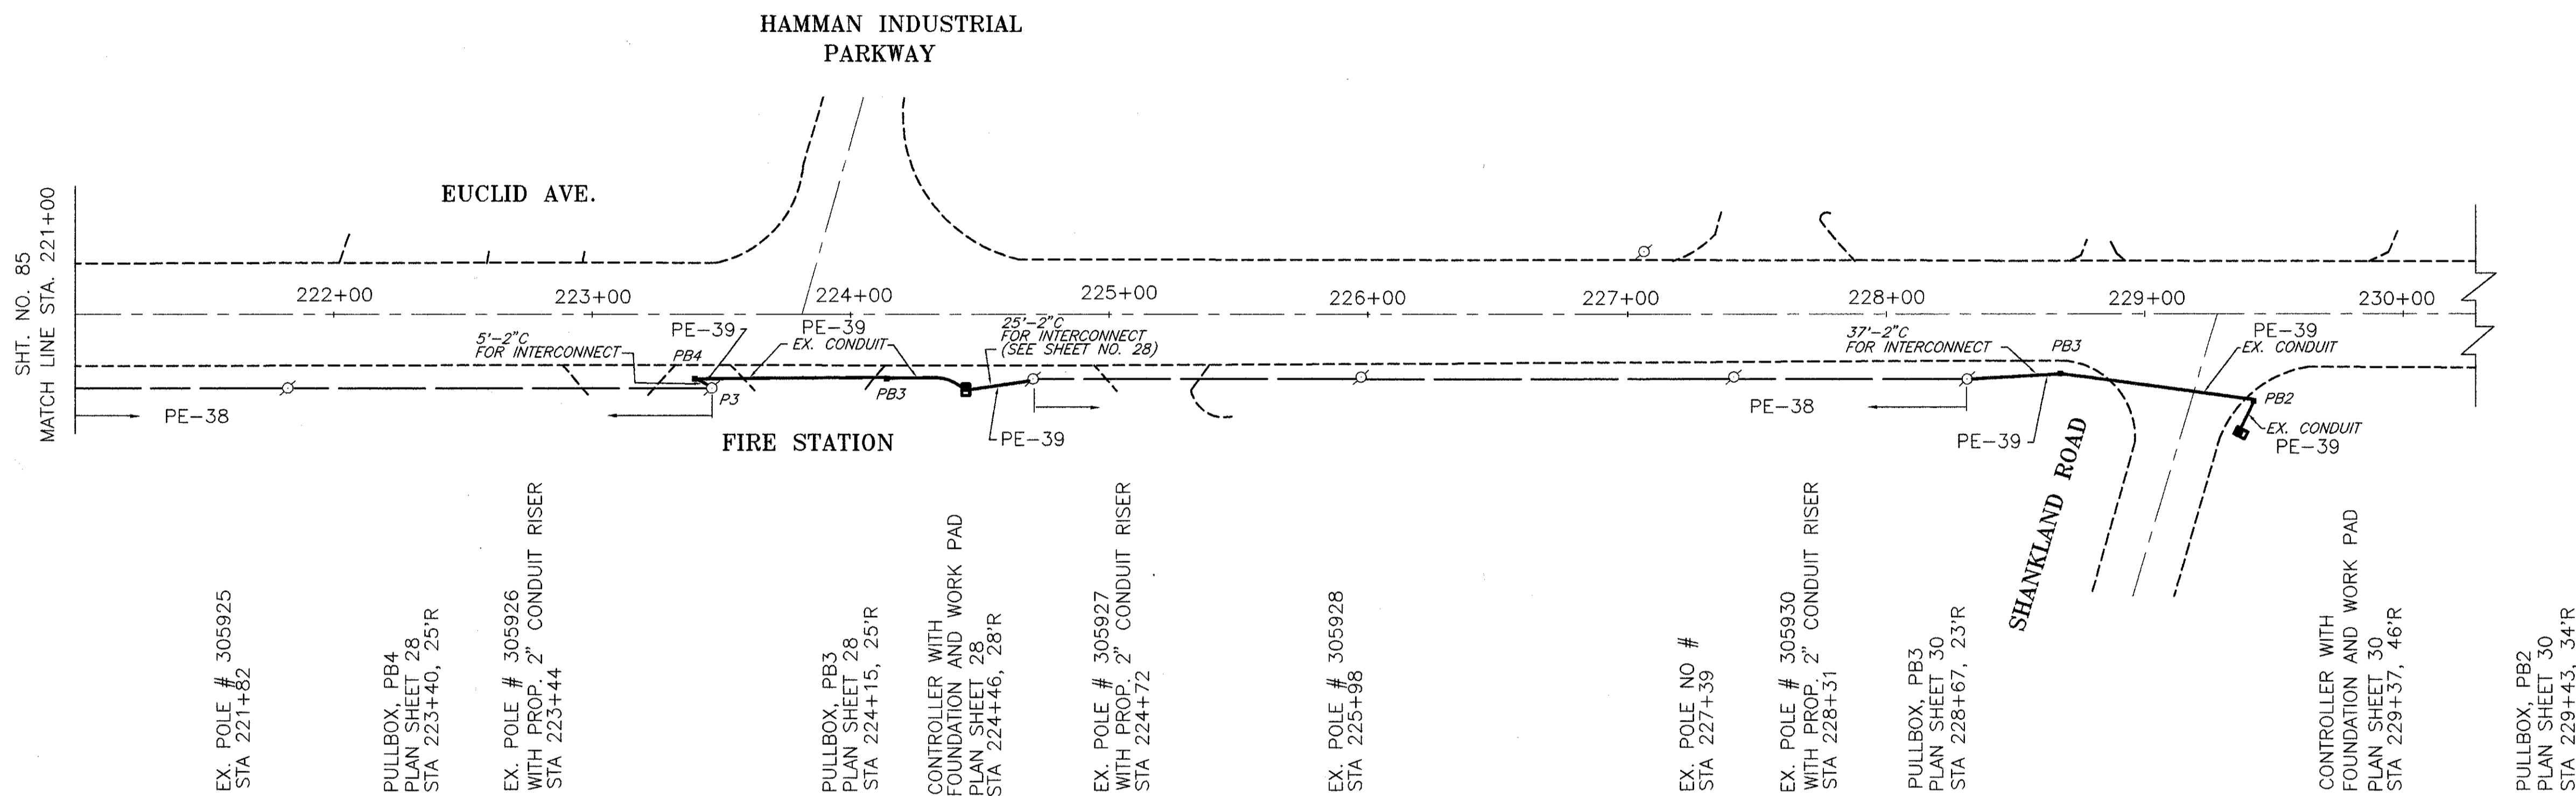


# EUCLID AVE. (U.S.20) SYSTEM INTERCONNECT

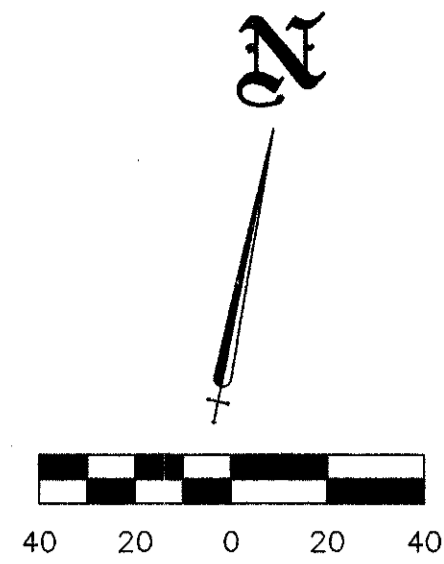

- NOTES:
1. PHASE SPLITS SHALL INCLUDE ALL GREEN PLUS YELLOW & ALL RED
  2. PERMISSIVES SHALL START AT THE ZERO POINT OF THE CYCLE
  3. OFFSETS SHALL BE REFERENCED TO THE BEGINNING OF PHASE 2 YELLOW

|                      | DIAL 1          | DIAL 2                   | DIAL 3                   |
|----------------------|-----------------|--------------------------|--------------------------|
| CYCLE LENGTH         | 85              | 100                      | 120                      |
| PHASE 1 SPLIT        | 16 %            | 12 %                     | 22 %                     |
| PHASE 2 SPLIT        | 68 %            | 75 %                     | 61 %                     |
| PHASE 3 SPLIT        | 16 %            | 13 %                     | 17 %                     |
| PHASE 4 SPLIT        | 16 %            | 12 %                     | 22 %                     |
| PHASE 5 SPLIT        | 14 %            | 11 %                     | 18 %                     |
| PHASE 6 SPLIT        | 68 %            | 75 %                     | 61 %                     |
| PHASE 8 SPLIT        | 16 %            | 13 %                     | 17 %                     |
| PERMISSIVE           | 10 %            | 10 %                     | 10 %                     |
| OFFSET               | 98 %            | 83 %                     | 89 %                     |
| TIME OF DAY SCHEDULE | ALL OTHER TIMES | 6:30AM TO 9:00AM MON-SAT | 3:30PM TO 6:30PM MON-SAT |

EUCLID AVE. AND SHOPING CTR./PARKHILL MED. CTR.  
COORDINATION TIMING