


L.P. Gramblet.

Kate M. Bennett.

FED. RD. DIST. NO.	STATE	FED. AID PROJECT	FISCAL YEAR
10	OHIO	4(A)	1939

9  
68

CLEVELAND-BUFFALO ROAD  
S.H. No. 2 SEC. J (PT)  
LAKE COUNTY

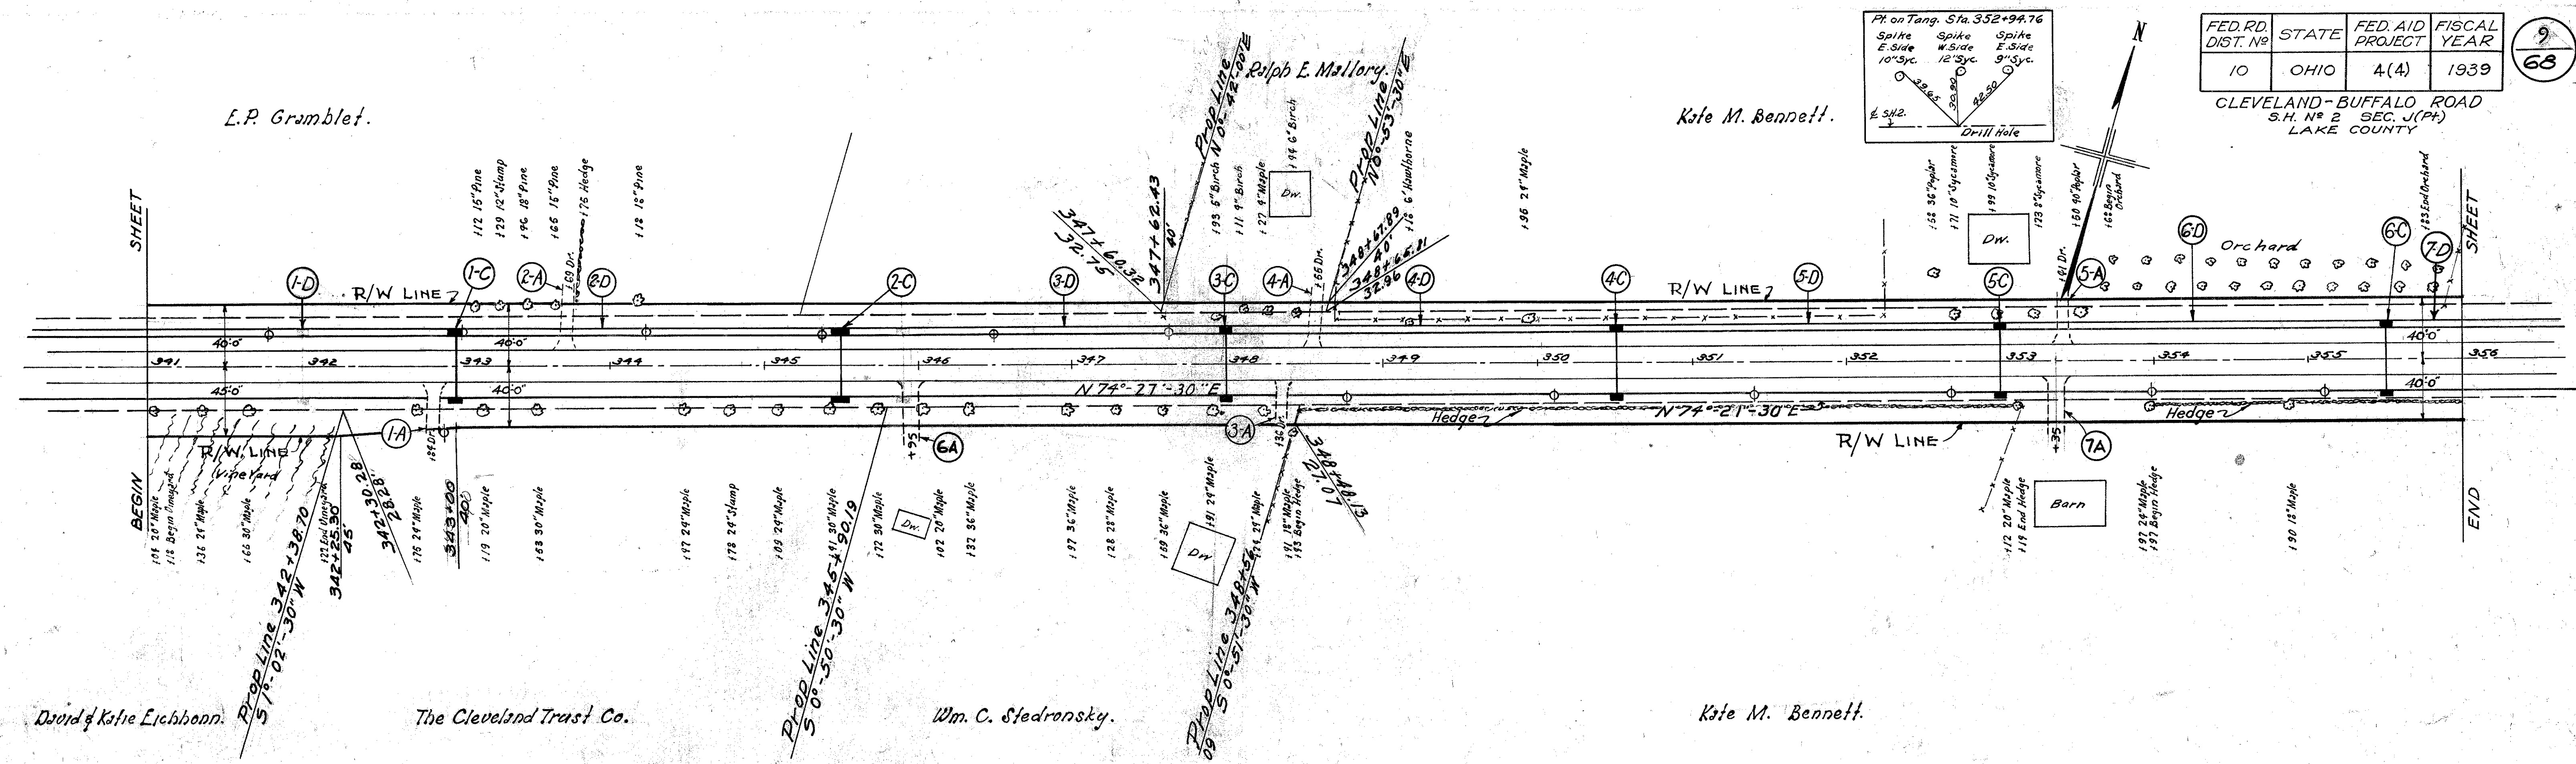

David & Katie Eichbaum.

The Cleveland Trust Co.

Wm. C. Stedronsky.

Kate M. Bennett.


B.M. #40 Sta. 345+10  
Spike in root 24' maple  
28' to R. of E.  
Elev. = 674.66

No.	Station	Dist. from	Size & Kind	Side	Work
1	341+04	28'	24' Maple	R	
2	341+36	28'	24' Maple	R	
3	341+65	28'	30' Maple	R	

B.M. #41 Sta. 349+36  
Spike in root 24' hickory  
30' to L. of E.  
Elev. = 677.62

Station	From	To	No. of S of E	Sq. Ft.	Seal Only E-10 Lin. Ft.
346+64	346+74		10'	100	20
Total				100	20
Total Square Yards				71	

B.M. #42 Sta. 354+87  
Spike in root 18' maple  
28.5' to R. of E.  
Elev. = 679.03

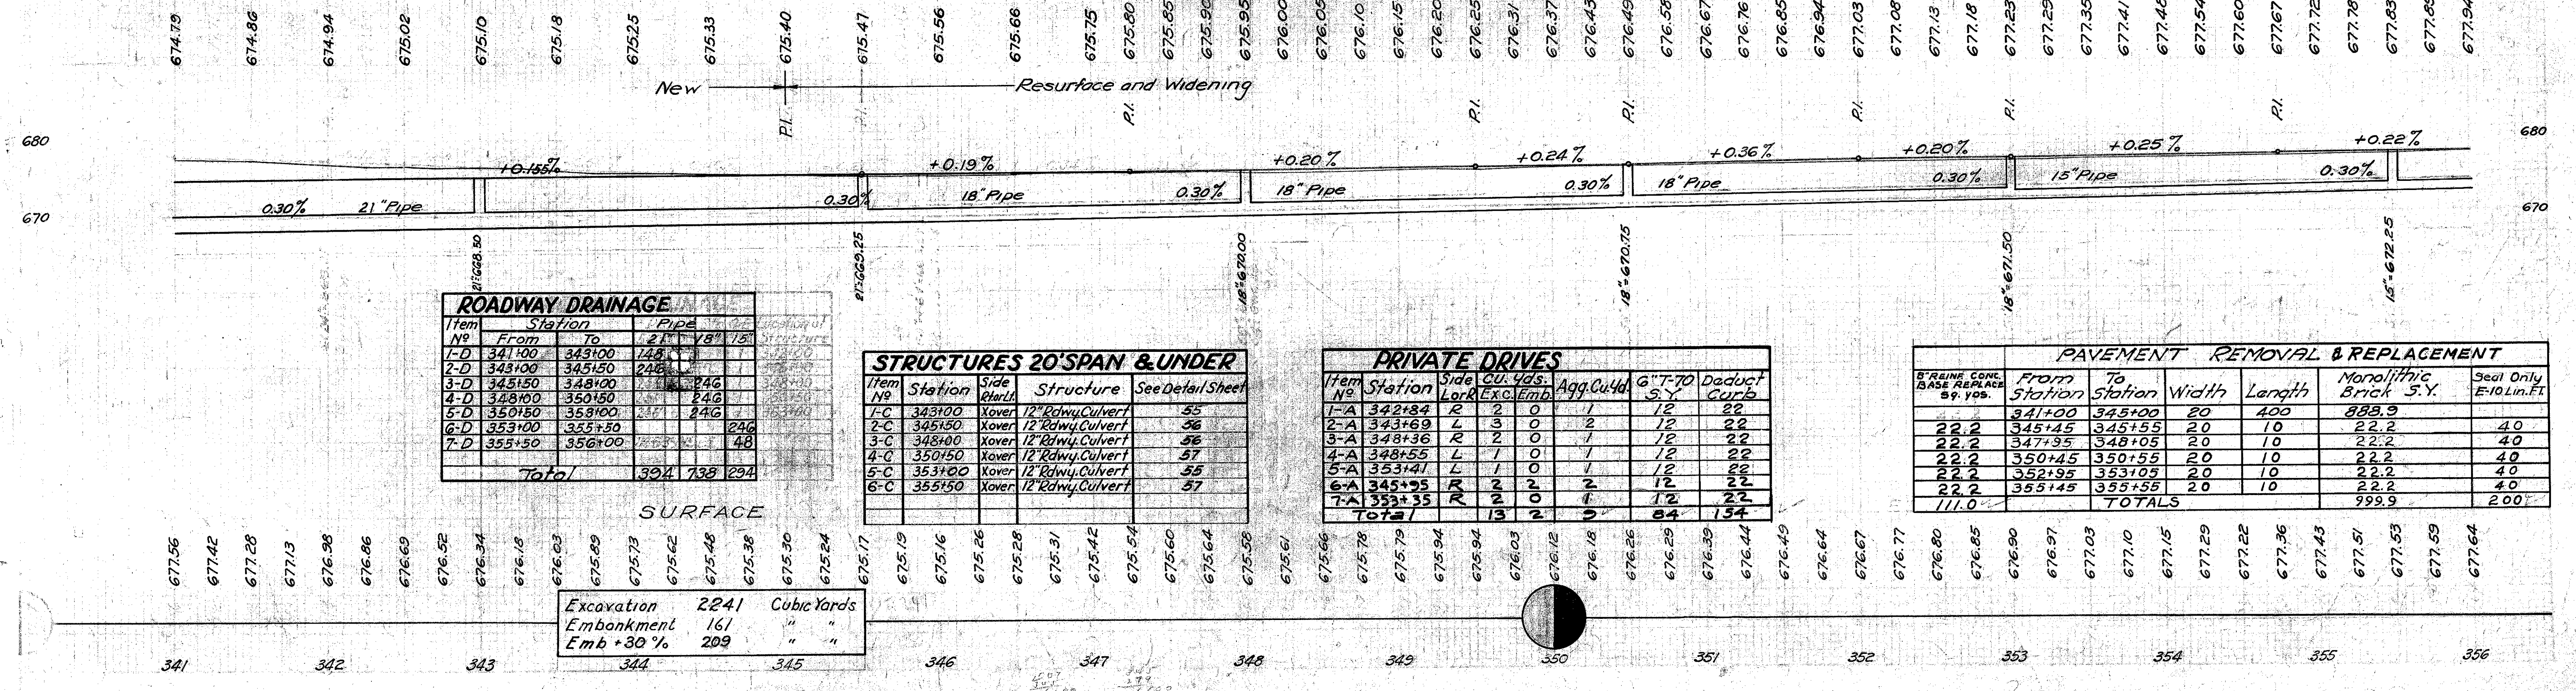

Item No.	Station	From	To	Pipe	Length
1-D	341+00	343+00	148'	21"	
2-D	343+00	345+150	215'	18"	
3-D	345+150	348+100	250'	18"	
4-D	348+100	350+150	250'	18"	
5-D	350+150	353+100	320'	18"	
6-D	353+100	355+50	225'	15"	
7-D	355+50	356+100	150'	15"	
Total		394'	133'	294'	

Item No.	Station	Side	Structure	See Detail Sheet
1-C	343+100	Xover	12" Rdwy. Culvert	55
2-C	345+150	Xover	12" Rdwy. Culvert	56
3-C	348+100	Xover	12" Rdwy. Culvert	56
4-C	350+150	Xover	12" Rdwy. Culvert	57
5-C	353+100	Xover	12" Rdwy. Culvert	55
6-C	355+150	Xover	12" Rdwy. Culvert	57

Item No.	Station	Side	CU. Yds. Exc.	Agg. Cu. Yds.	G-T-70 S.Y.	Deduct Curb
1-A	342+84	R	2	0	1	12
2-A	343+69	L	3	0	2	12
3-A	348+36	R	2	0	1	12
4-A	348+55	L	1	0	1	12
5-A	353+41	L	1	0	1	12
6-A	345+33	R	2	2	1	12
7-A	353+35	R	2	0	1	12
Total			13	2	7	84

Item No.	From Station	To Station	Width	Length	Monolithic Brick S.Y.	Seal Only E-10 Lin. Ft.
22.2	341+00	345+00	20	400	888.9	
22.2	345+15	345+155	20	10	22.2	40
22.2	347+95	348+105	20	10	22.2	40
22.2	350+45	350+55	20	10	22.2	40
22.2	352+95	353+105	20	10	22.2	40
22.2	355+145	355+155	20	10	22.2	40
TOTALS					999.9	200

Excavation	2241	Cubic Yards
Embankment	161	" "
Emb + 30%	209	" "