


CALC: *CB* 5/77  
 CHK: *WDB* 5/77

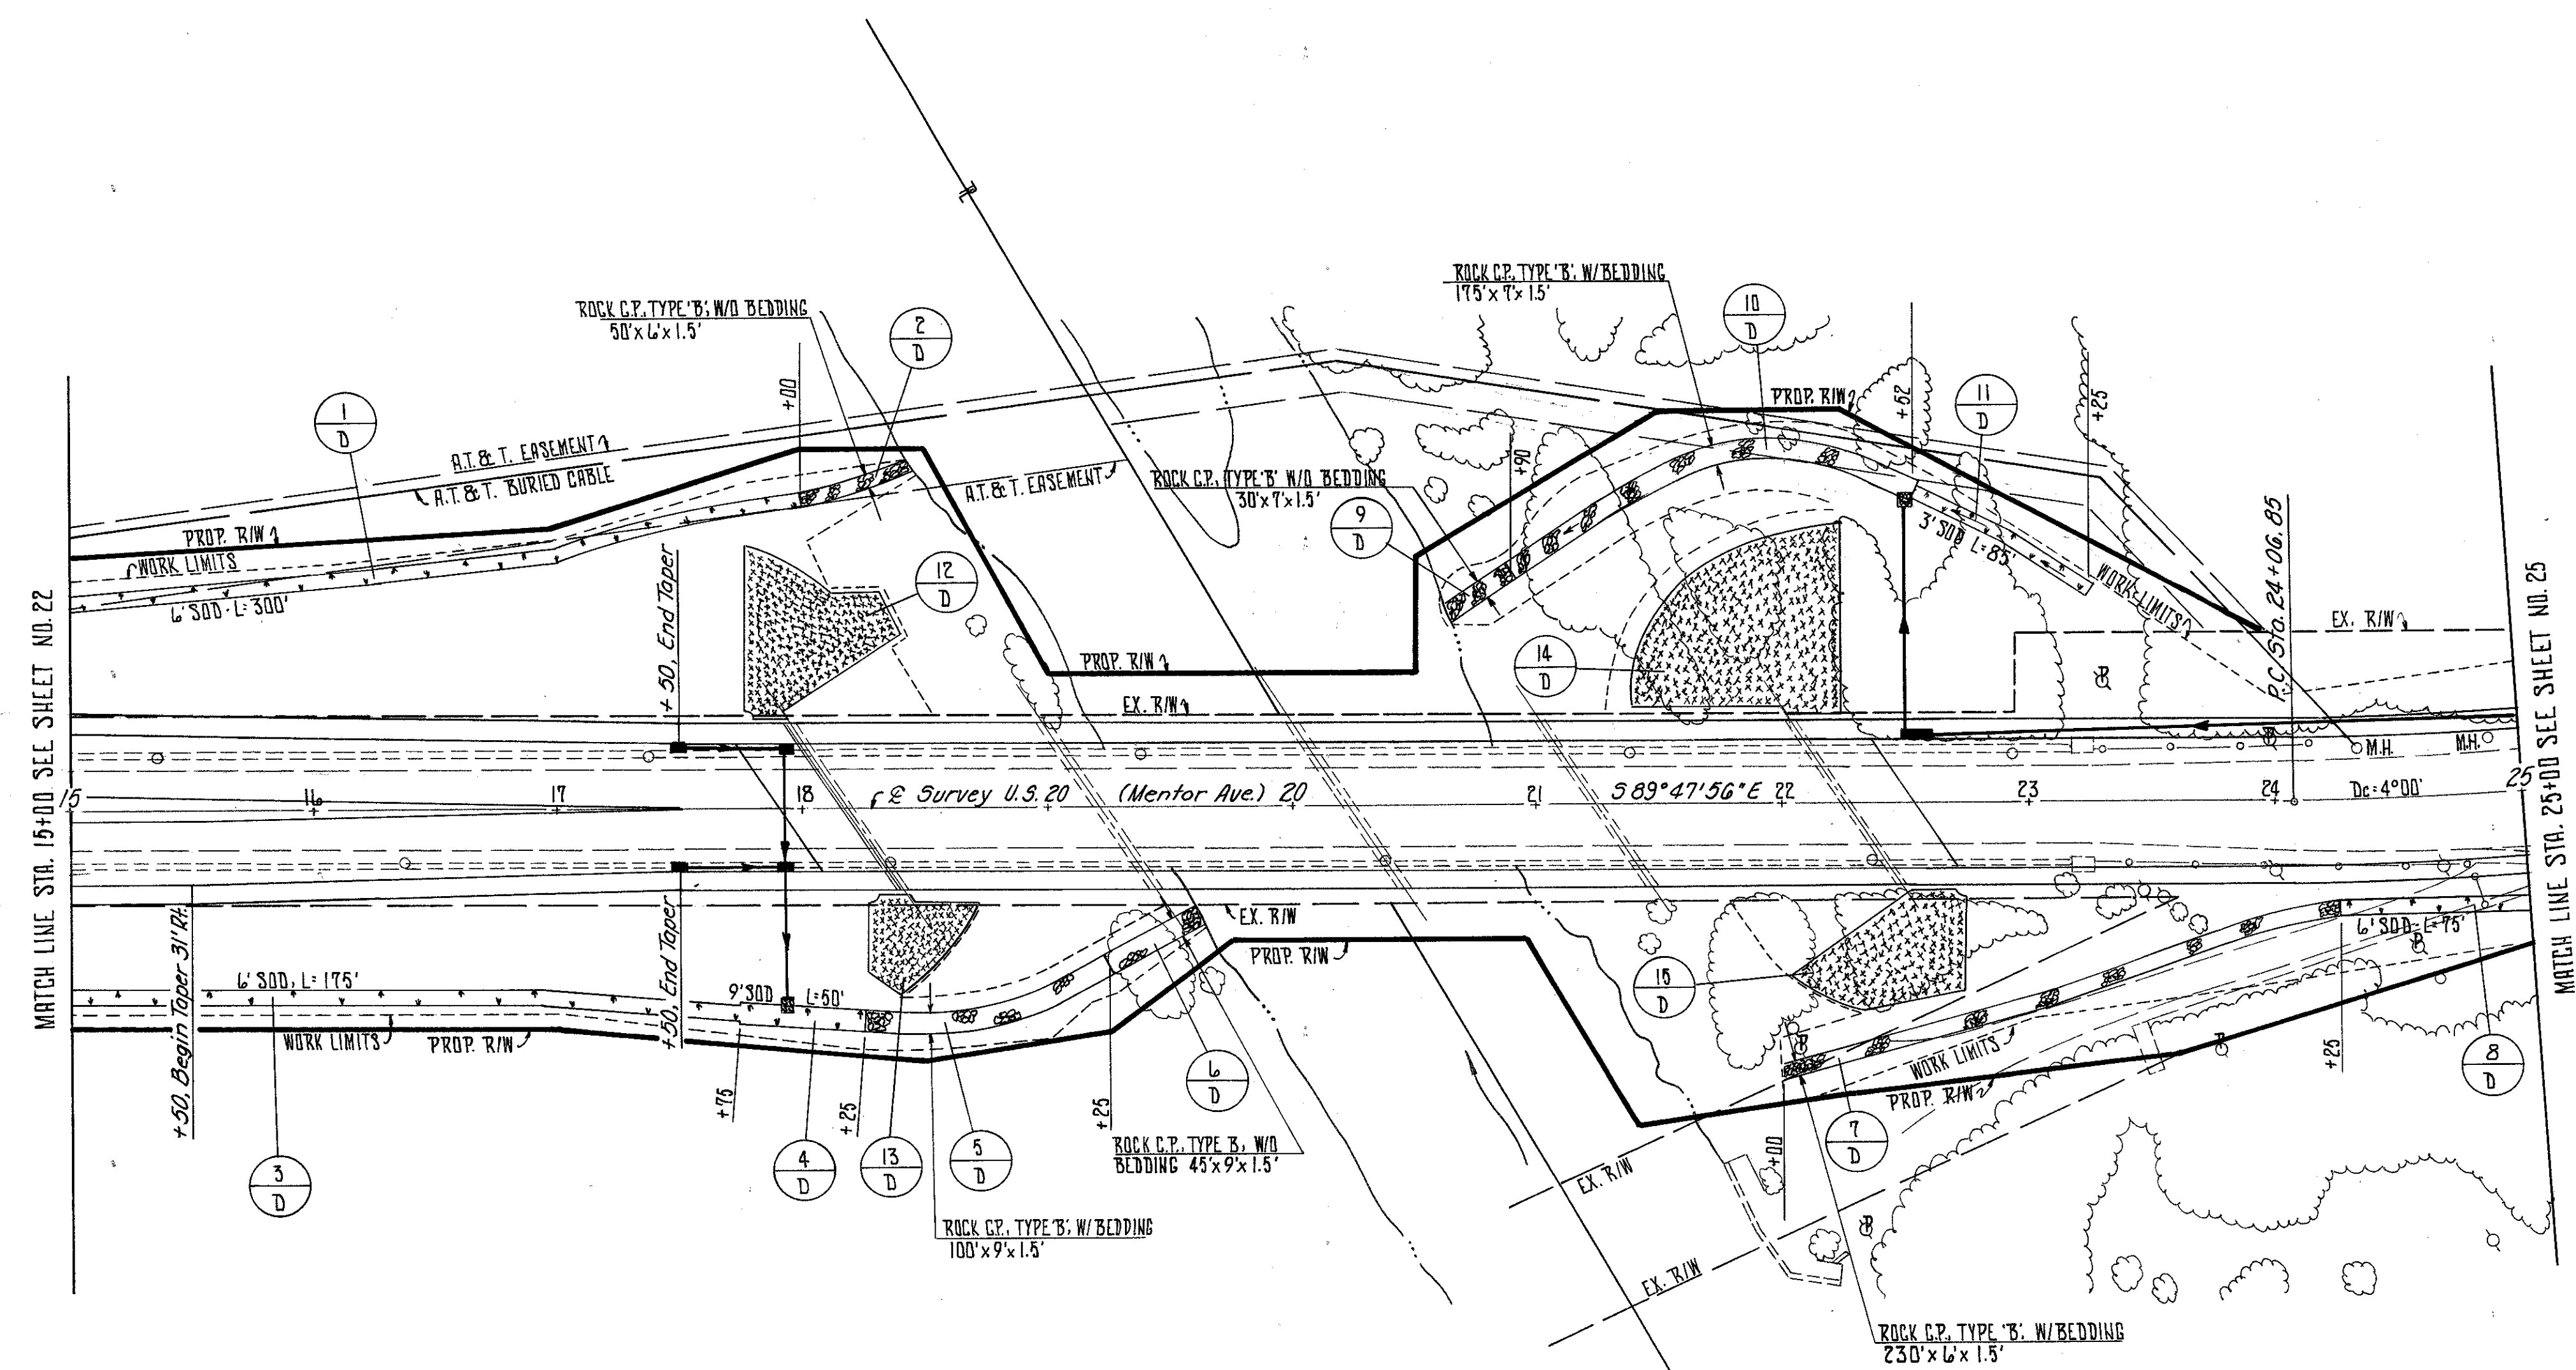

NOTES:  
 1. FOR STORM SEWER DETAILS AND QUANTITIES SEE SHEET NO. 23, 24 & 25.

Sht.No.		SQ.YD.
22	Sodding	268
28	Sodding	474
14	265 C.Y. ROCK	398
14	52 C.Y. ROCK	104
14	Seed & Jute	1487
TOTALS		2731 = 12,940 TO GEN. SUM.

REF.	STATION TO STATION	SIDE	* WITH BEDDING		** W/O BEDDING		Sodding	JUTE MATTING
			ROCK C.P. TYPE 'B'	ROCK C.P. TYPE 'B'	Sodding	JUTE MATTING		
			CY.	CY.	SQ.	SQ.		
1-D	15+00 TO 18+00	LT.			200			
2-D	18+00 TO 18+50	LT.		17				
3-D	15+00 TO 17+75	RT.			117			
4-D	17+75 TO 18+25	RT.			50			
5-D	18+25 TO 19+25	RT.	67					
6-D	19+25 TO 19+60	RT.		23				
7-D	22+00 TO 24+25	RT.	103					
8-D	24+25 TO 25+00	RT.			50			
9-D	20+65 TO 20+90	LT.		12				
10-D	20+90 TO 22+62	LT.	91					
11-D	22+52 TO 23+25	LT.			57			
12-D	17+77 TO 18+52	LT.					371	
13-D	18+26 TO 18+76	RT.					191	
14-D	21+40 TO 22+23	LT.					646	
15-D	22+18 TO 22+74	RT.					279	
TOTALS			261	52	474	1487		