

- CASTINGS RESET**
- Storm Manholes 1
 - ⊕ Sanitary Manholes 7
 - + Water Valve Boxes 10
 - Monument Boxes 1
 - ▽ Catch Basin 1

P.C. STA. 49+75
 P.T. STA. 51+89.81
 R.I. = 1054.92'
 P.I. = Sta. 50+82.78
 11°-40'-30"
 5°-26'
 107.78'
 214.81'
 1054.92'
 Sta. 50+82.78

LAKE SHORE BLVD. S.H. 520

B.M. - ELEY 618.86
 LETTER "O" IN OPEN ON HYDRANT SOUTH OF STA. 53+0

SQ. YDS. IN CENTER STRIP

Station From	Station To	Length	Width	Sq. Ft.	Sq. Ft. in Ends	Total Sq. Ft.	Sq. Yds.	Sealing Edge E-B Lin. Ft.
46+50	48+50	200	18.5	3700.0		3700.00		400.00
53+25	60+71	746	18.5	13801.0	134.40	13935.40		1521.10
62+38	62+50	12	18.5	222.0	134.40	356.40		53.10
				Total		17991.80	1999.09	1974.20

MONUMENT BOXES

Station	Monument Box Set Each
P.I. Sta. 50+82.78	1
Total	1


SEWER - Totals

ITEM NO.	STATION FROM	STATION TO	SIDE E. OR W.	ITEM I-2 12" Pipe Under Pavement Lin. Ft.	SPEC. C-1 #3 Each	SPEC. C-1 #3 Salvage Casting Each	C.B. Abandon Each
1E	48+75	49+38	W.	65	1		
2E	51+53	51+53	W.				1
3E	52+75	53+20	E. & W.	74		1	
4E	49+25	49+38	E.	30	1		
5E	51+53	53+20	E.	165	1		
SEWER - Totals				165	169	3	1

ROADSIDE IMPROVEMENT

Station From	Station To	Seeding - Item E-305 #/lbs per 1000 Sq. Ft.	Comm. Fertilizer 10-6-4 Item L-9-20/lbs per 1000 Sq. Ft.	Ag. Ground Limestone Item L-9-50/lbs per 1000 Sq. Ft.
48+50	53+25	1853	334	834
		* 100	* 18	* 45
Total		1953	352	879

* An additional quantity of 100 Sq. Yds. of Seeding, 18 lbs. Commercial Fertilizer and 45 lbs. Agricultural Ground Limestone has been included in the General Summary to be used at the direction of the Engineer, where and as required beyond the normal limits of the work.

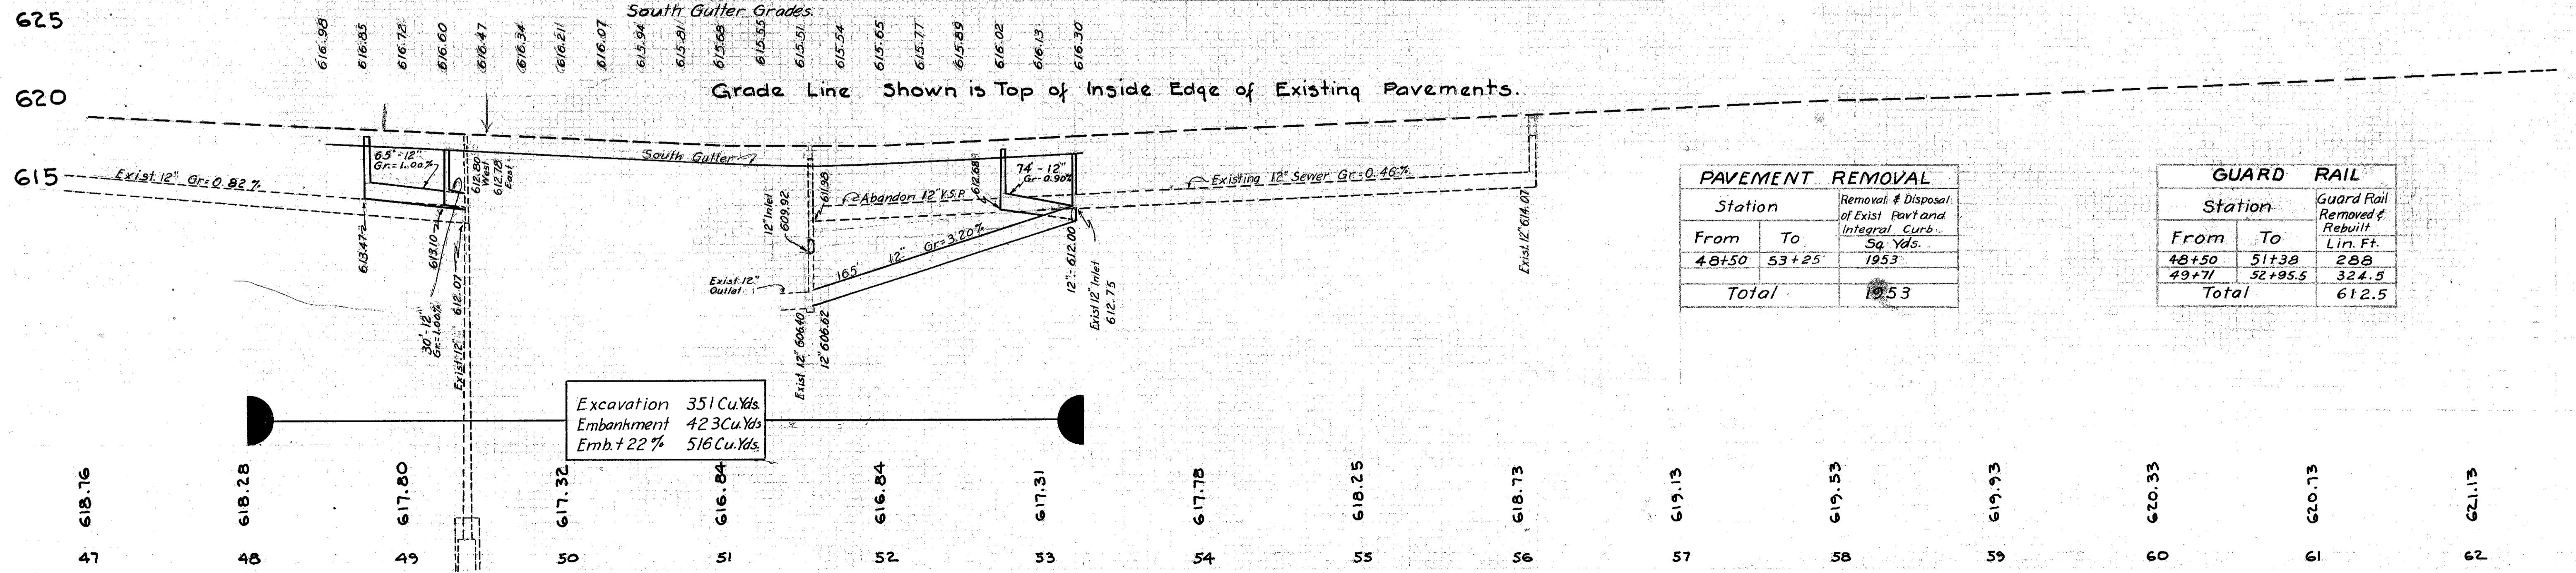

Excavation 351 Cu. Yds.
 Embankment 423 Cu. Yds.
 Emb. + 22% 516 Cu. Yds.

PAVEMENT REMOVAL

Station From	Station To	Removal & Disposal of Exist Pavt and Integral Curb Sq. Yds.
48+50	53+25	1953
Total		1953

GUARD RAIL

Station From	Station To	Guard Rail Removed & Rebuilt Lin. Ft.
48+50	51+38	288
49+71	52+95.5	324.5
Total		612.5