
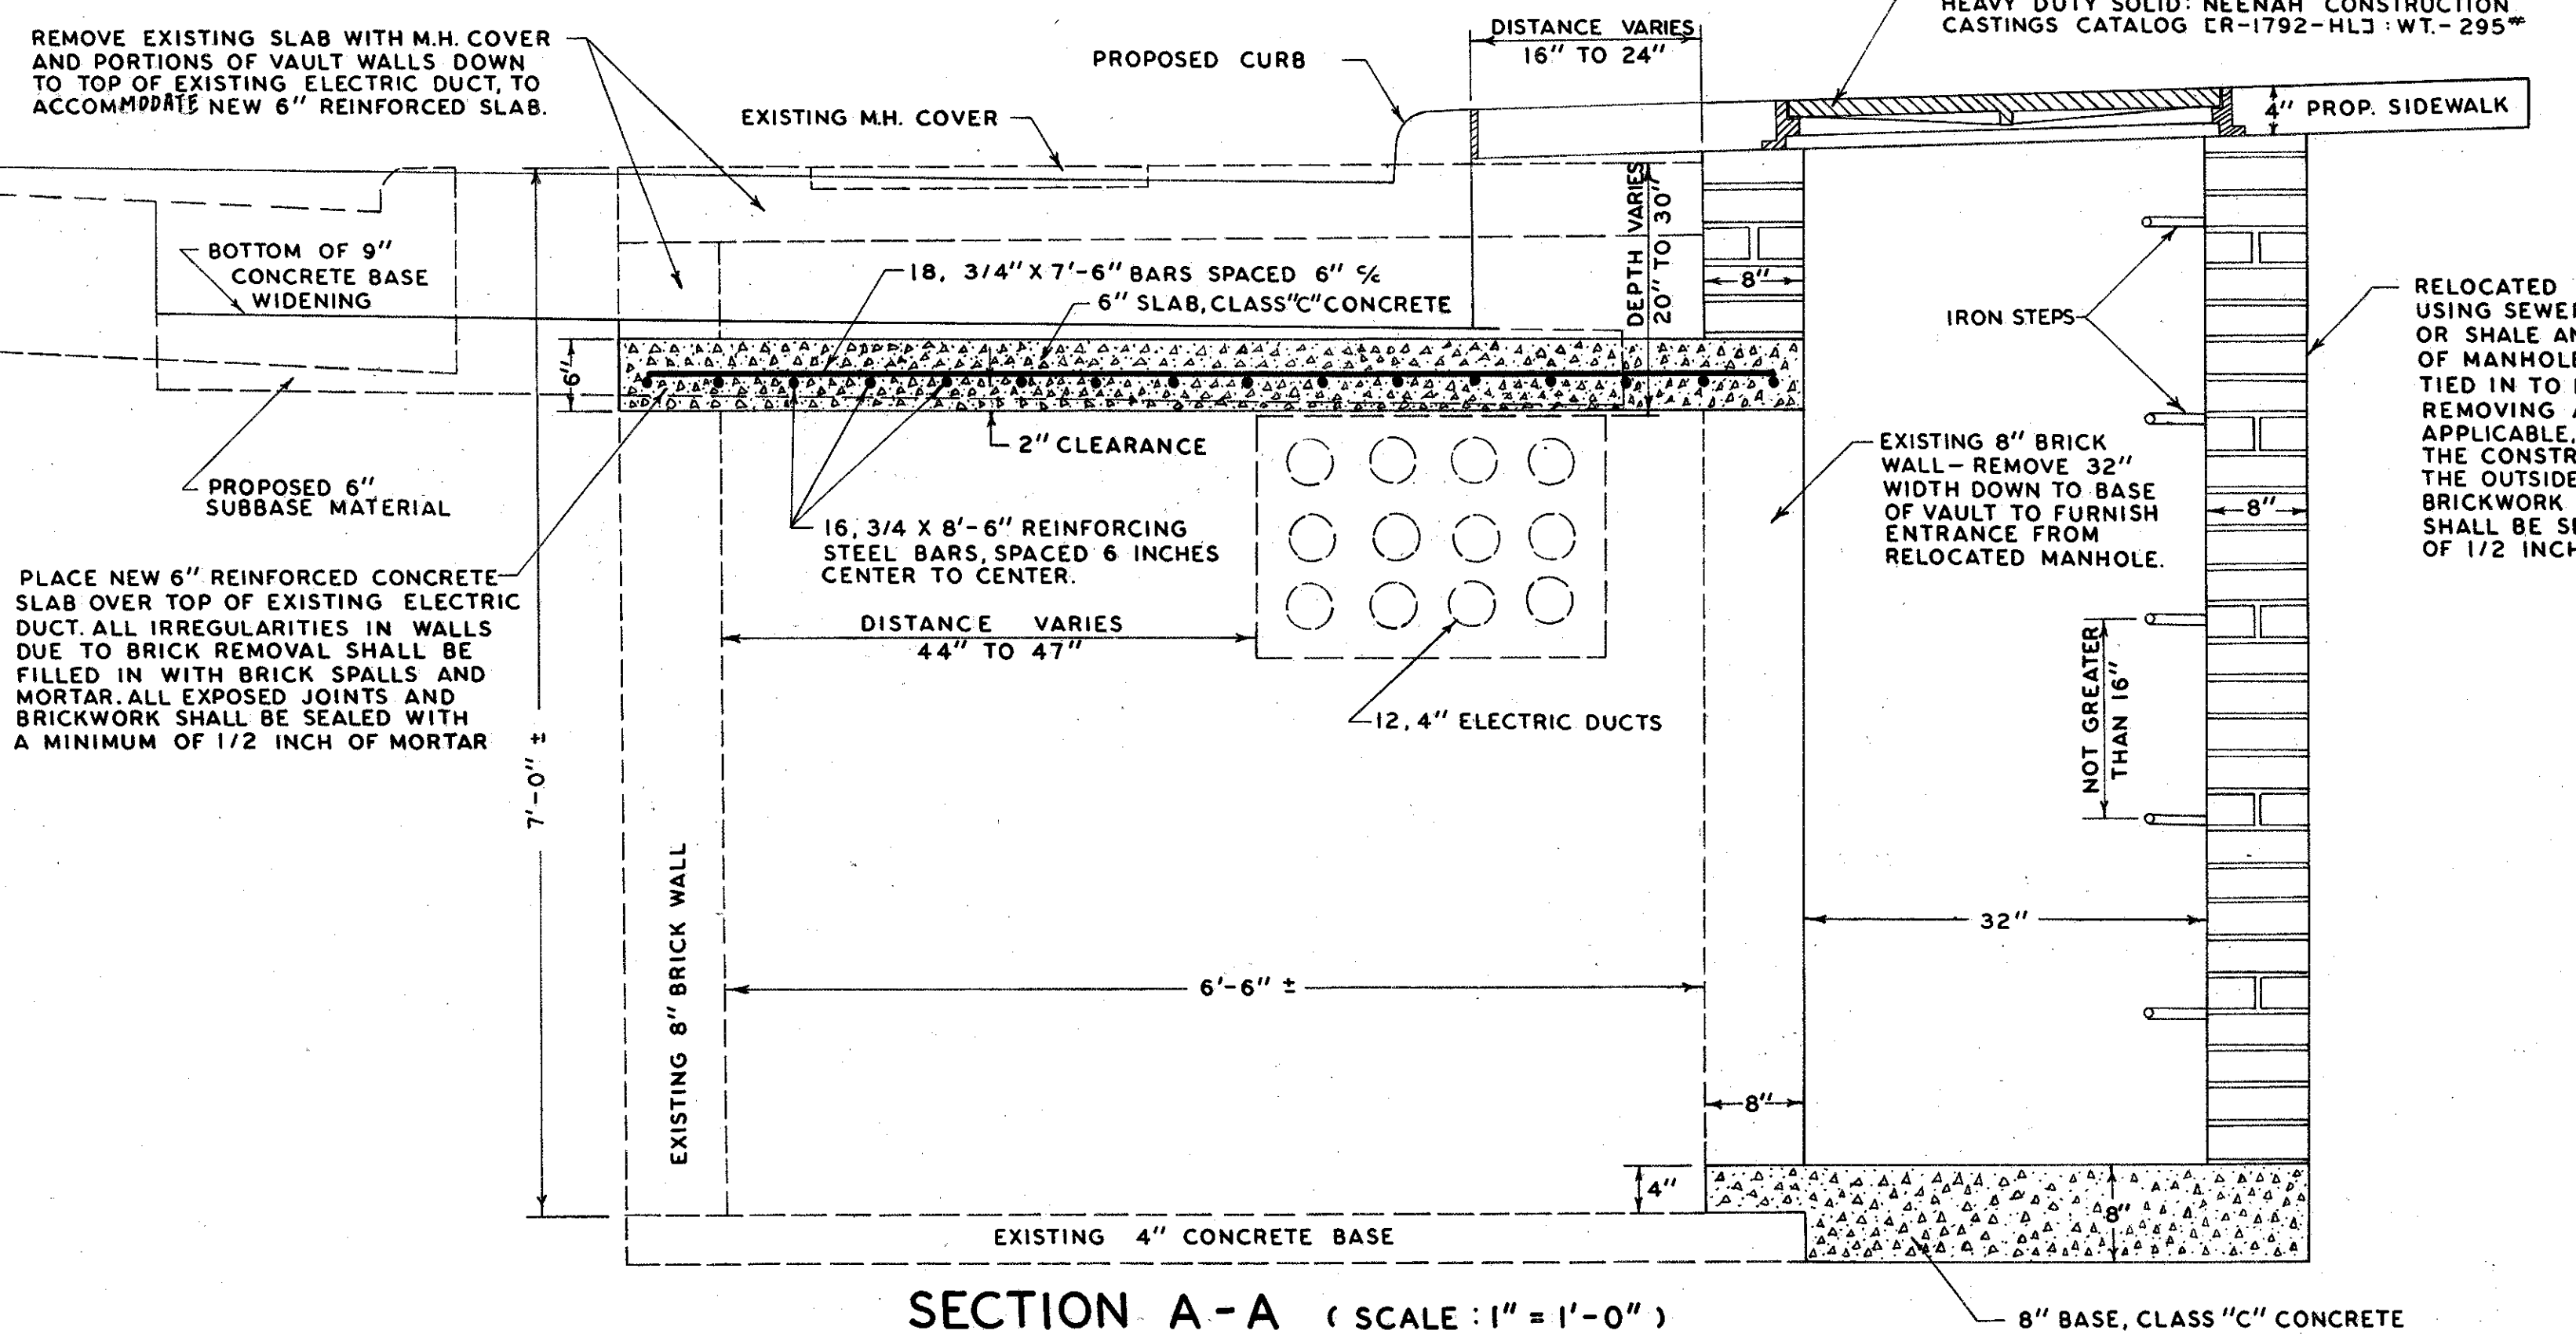


MODIFICATION OF ELECTRIC MANHOLE & VAULT (Mod. No.1)

FED. RD. DIVISION	STATE	PROJECT	
2	OHIO		

18
34

LAKE COUNTY
LAK - 283 - 16.85

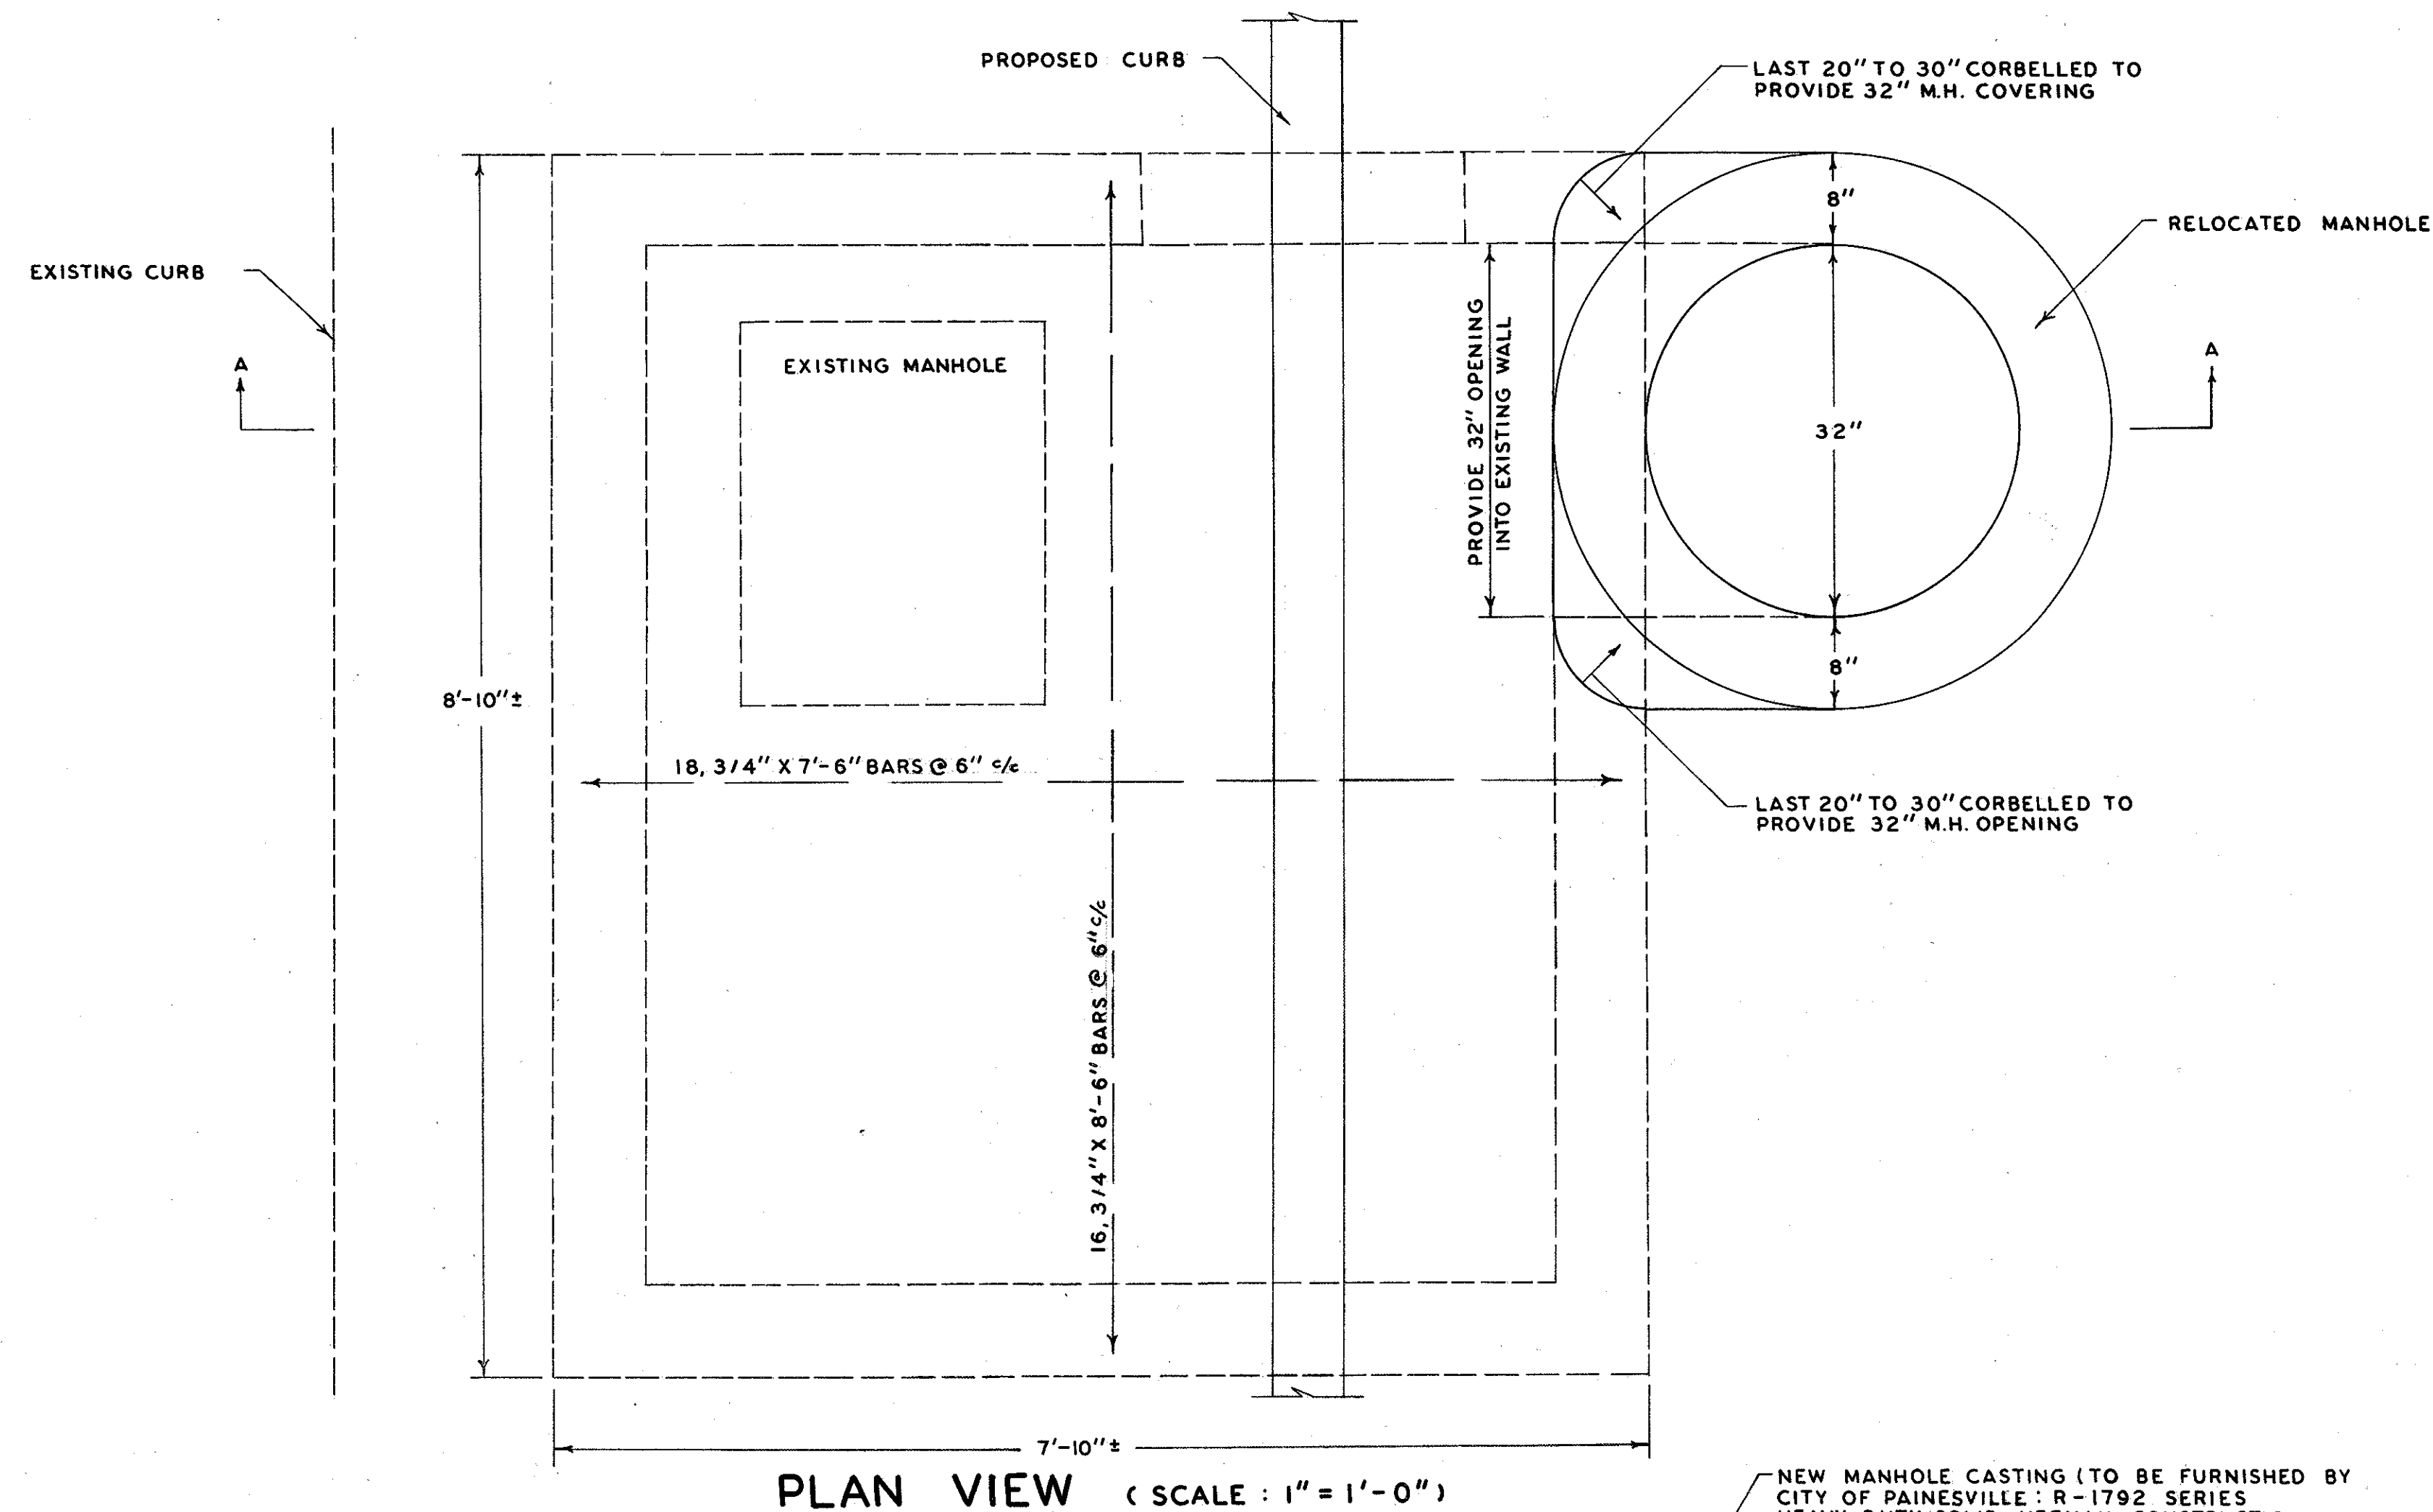

ITEM-604 SPECIAL-MODIFICATION of ELECTRIC M.H. & VAULT	
STATION	NUMBER
7+45 RT.	1 EA.
13+22 RT.	1 EA.
21+62 RT.	1 EA.
24+00 RT.	1 EA.
TOTAL = 4 EACH	

NOTE:
COST OF REMOVAL OF PORTIONS OF EXISTING SLAB AND VAULT WALLS, REINFORCING STEEL, CONCRETE FOR VAULT SLAB AND MANHOLE BASE, BRICK MASONRY, PLACING ALL CASTINGS (EXCEPT THE FURNISHING THERE-OF), FORM WORK AND CURING OF CONCRETE SLAB AND MANHOLE BASE AND ALL OTHER MATERIALS AND INCIDENTALS, LABOR AND EQUIPMENT ETC., NECESSARY TO COMPLETE THIS ITEM, SHALL BE INCLUDED UNDER PAYMENT FOR EACH ITEM 604 SPECIAL MODIFICATION OF ELECTRIC MANHOLE & VAULT.
REINFORCING STEEL TO BE PLACED IN ACCORDANCE WITH ITEM-509
CONCRETE FOR VAULT SLAB SHALL BE PLACED AND CURED IN ACCORDANCE WITH ITEM-511

NOTE:
IF THE CONTRACTOR SO ELECTS, THE 6" REINFORCED CONCRETE SLABS MAY BE INDIVIDUALLY PRE-CAST NEAR THE JOB SITE, TO ALLOW INSPECTION, THEN PLACED OVER THE ELECTRIC VAULT, PROVIDED THE OUTER DIMENSIONS FOR EACH PARTICULAR SLAB ARE PRE-DETERMINED BY THE CONTRACTOR TO FIT THE APPROPRIATE ELECTRIC VAULT AND THE SLAB HAS BEEN PROPERLY CURED FOR NOT LESS THAN 7 DAYS.