


CONSOLIDATED INVESTMENTS CORP.
Vol. 358 Pg. 91
P.P. No. 18C-18E-00-001 & 020

J.B. LOWE, INC.
Vol. 571 Pg. 937
P.P. No. 18C-80E-00-036


MENTOR AERIE NO. 3805 F.O.E.
Doc. No. 800047430
P.P. No. 18C-80E-00-035

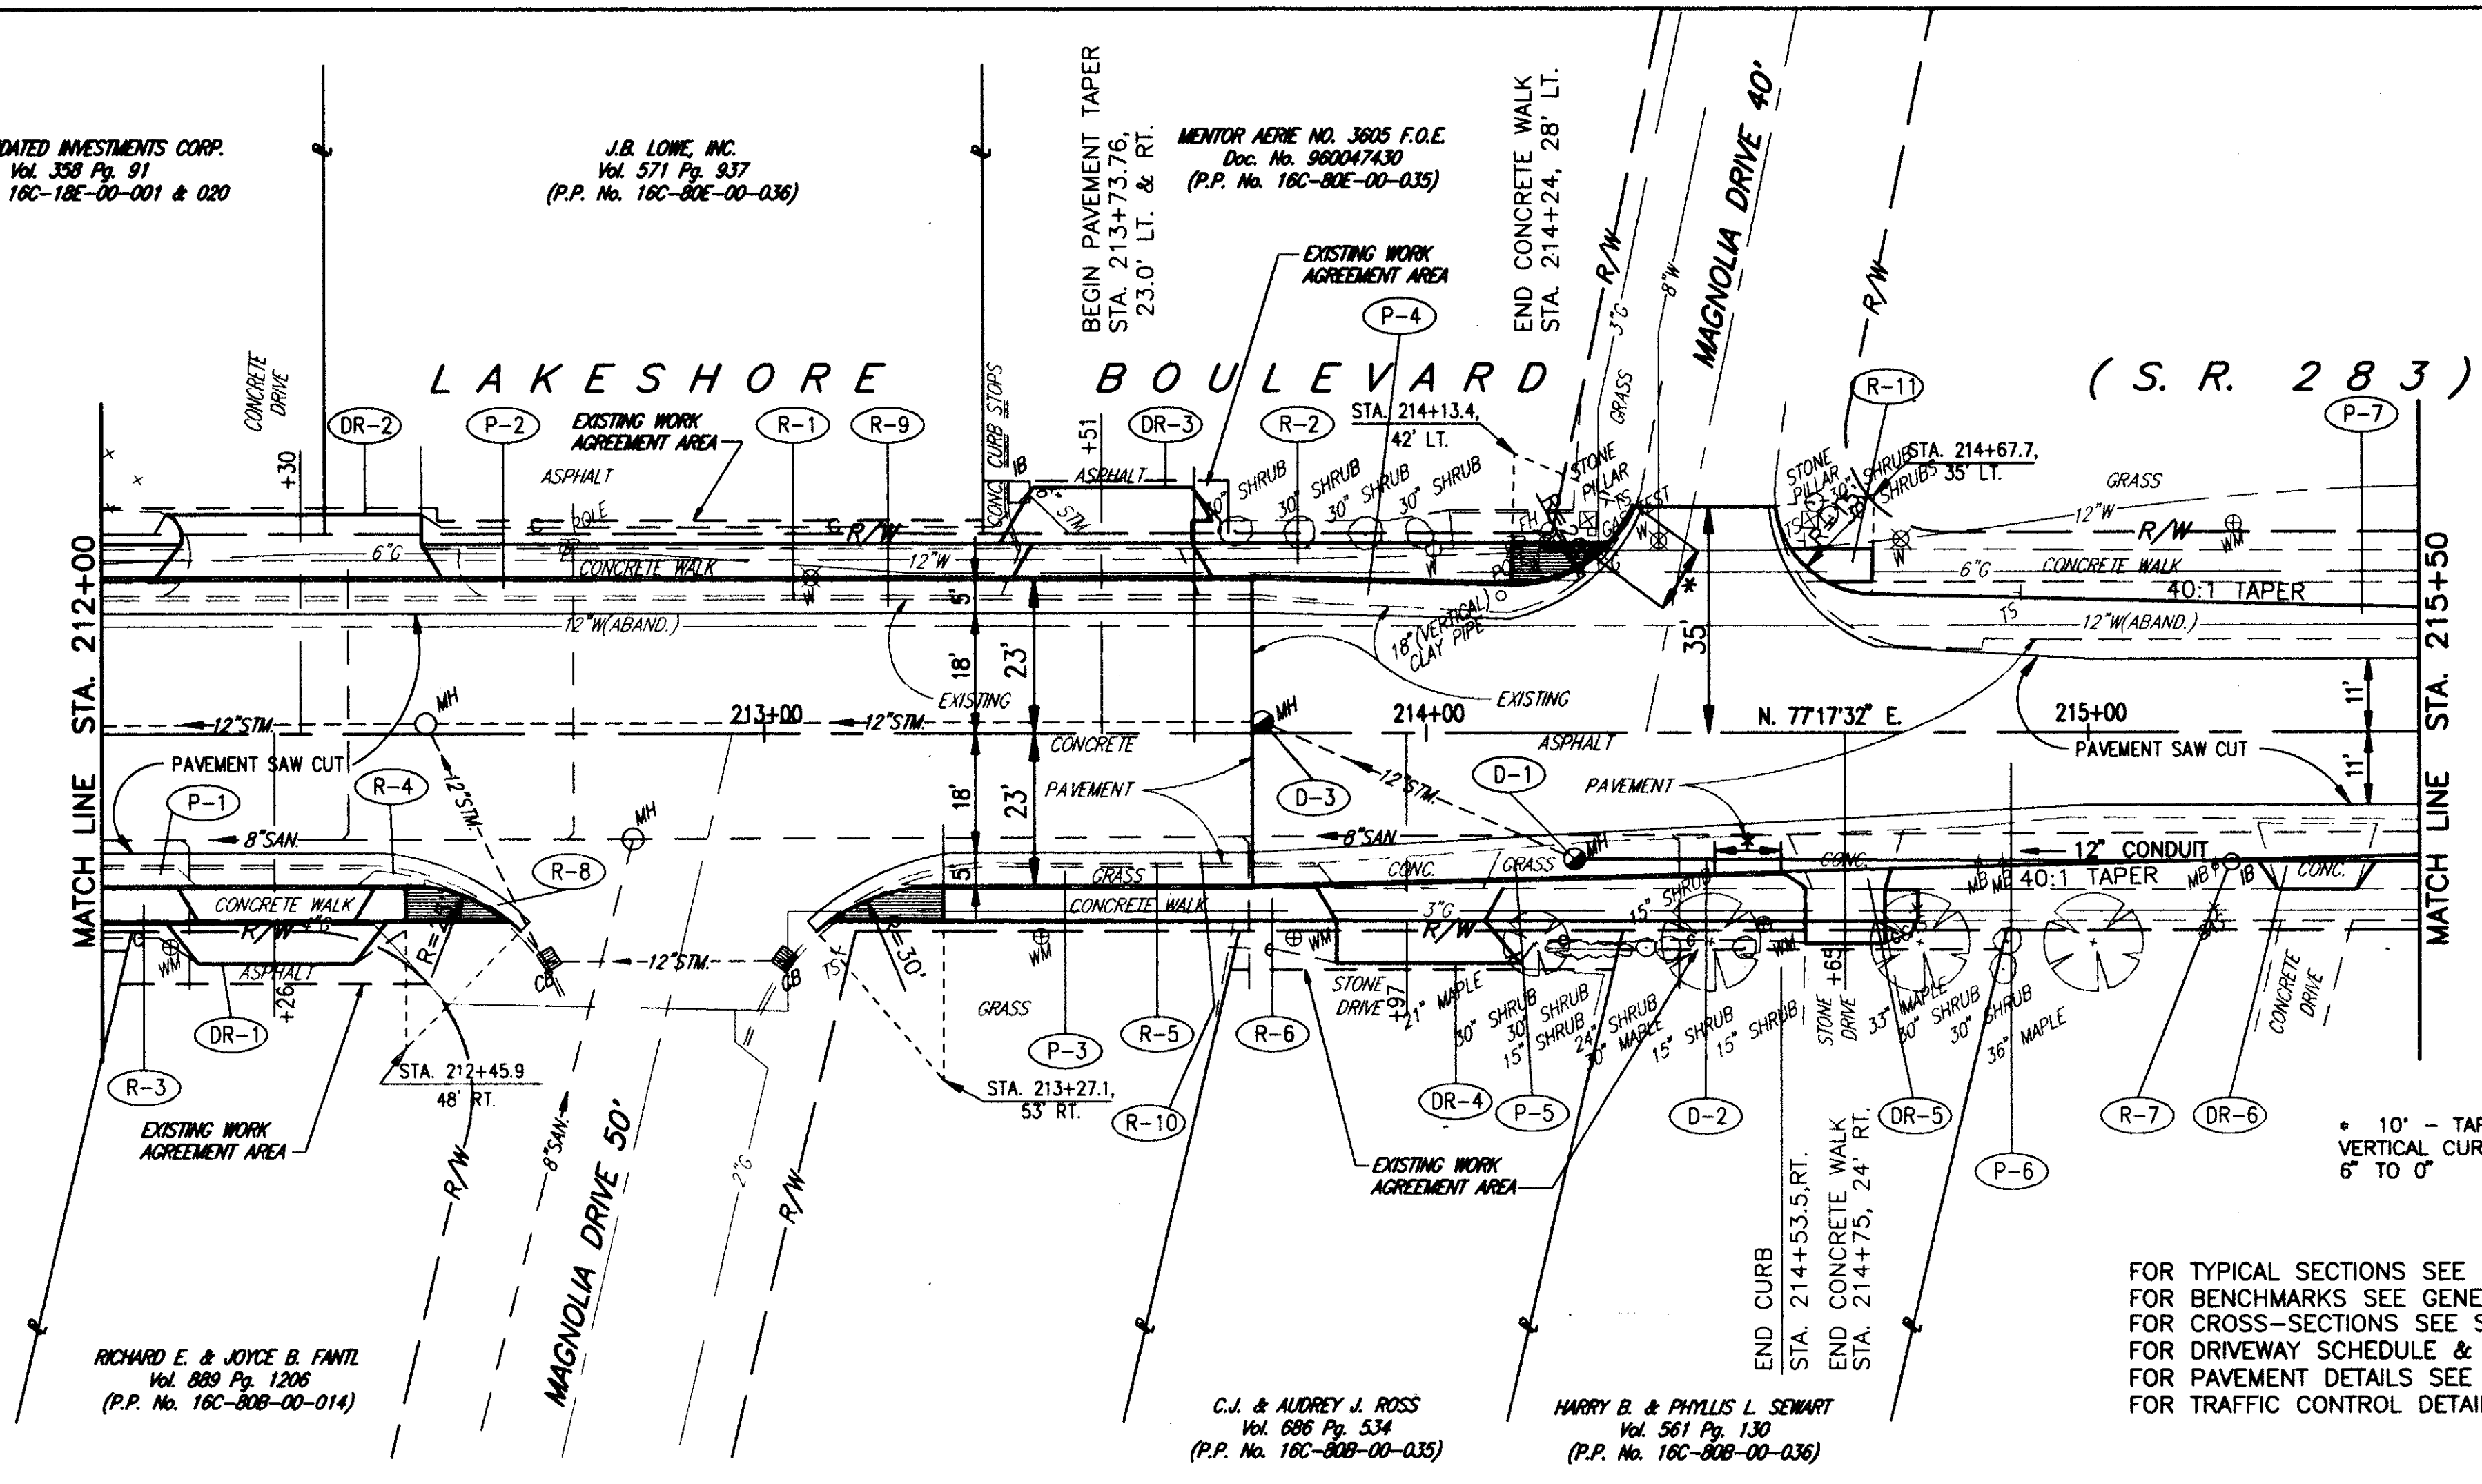

FOR TYPICAL SECTIONS SEE SHEETS 3 THRU 6
FOR BENCHMARKS SEE GENERAL NOTE SHEET 7
FOR CROSS-SECTIONS SEE SHEETS 34 THRU 73
FOR DRIVEWAY SCHEDULE & DETAILS SEE SHEET 79 & 80
FOR PAVEMENT DETAILS SEE SHEET 81
FOR TRAFFIC CONTROL DETAILS SEE SHEETS 84 THRU 104

REF	LOCATION	SO. YD.	SO. FT.	IN. FT.	EACH	TOTALS
608	CURB RAMP, TYPE 2				1	3
608	4" CONCRETE WALK	810	150			1885
202	CATCH BASIN OR INLET REMOVED	183				1
202	CURB REMOVED	810	150			665
202	WALK REMOVED	150				590
202	PAVEMENT REMOVED	160	386	15.3	58	69.9
TOTALS						1885

REF	LOCATION	SO. YD.	SO. FT.	IN. FT.	EACH	TOTALS
609	CURB, TYPE 6				65	307
609	CURB, TYPE 2-A	40.0	96.6			148
451	10" REINFORCED CONCRETE PAVEMENT	40.0	34.8			65
448	1-1/4" ASPH. CONC. SURFACE COURSE, TYPE 1, PG64-22		1.0			65
448	0" MIN. ASPH. CONC. INTERMEDIATE COURSE, TYPE 1, PG64-22		4.8			65
448	1-3/4" ASPH. CONC. INTERMEDIATE COURSE, TYPE 2, PG64-22		6.8			65
411	6" STABILIZED CRUSHED AGGREGATE		3.0			6.2
408	BITUMINOUS PRIME COAT (0.40 GAL./SQ.YD.)		56.0			104.0
407	TACK COAT (0.05 GAL./SQ.YD.)		7.0			12.9
407	TACK COAT (0.10 GAL./SQ.YD.)		59.6			28.6
304	AGGREGATE BASE, AS PER PLAN	6.7				28.6
304	AGGREGATE BASE, AS PER PLAN	16.1				28.6
301	7" BITUMINOUS AGGREGATE BASE, PG64-22	6.0	3.4			9.9
255	FULL DEPTH PAVEMENT SAWING	72				321
254	1-1/4" PAVEMENT PLANING, BITUMINOUS	174				596
203	SUBGRADE COMPACTION	11.9				229
203	EXCAVATION NOT INCLUDING EMBANKMENT CONSTRUCTION	54.1	139.2			139.0
TOTALS						1885

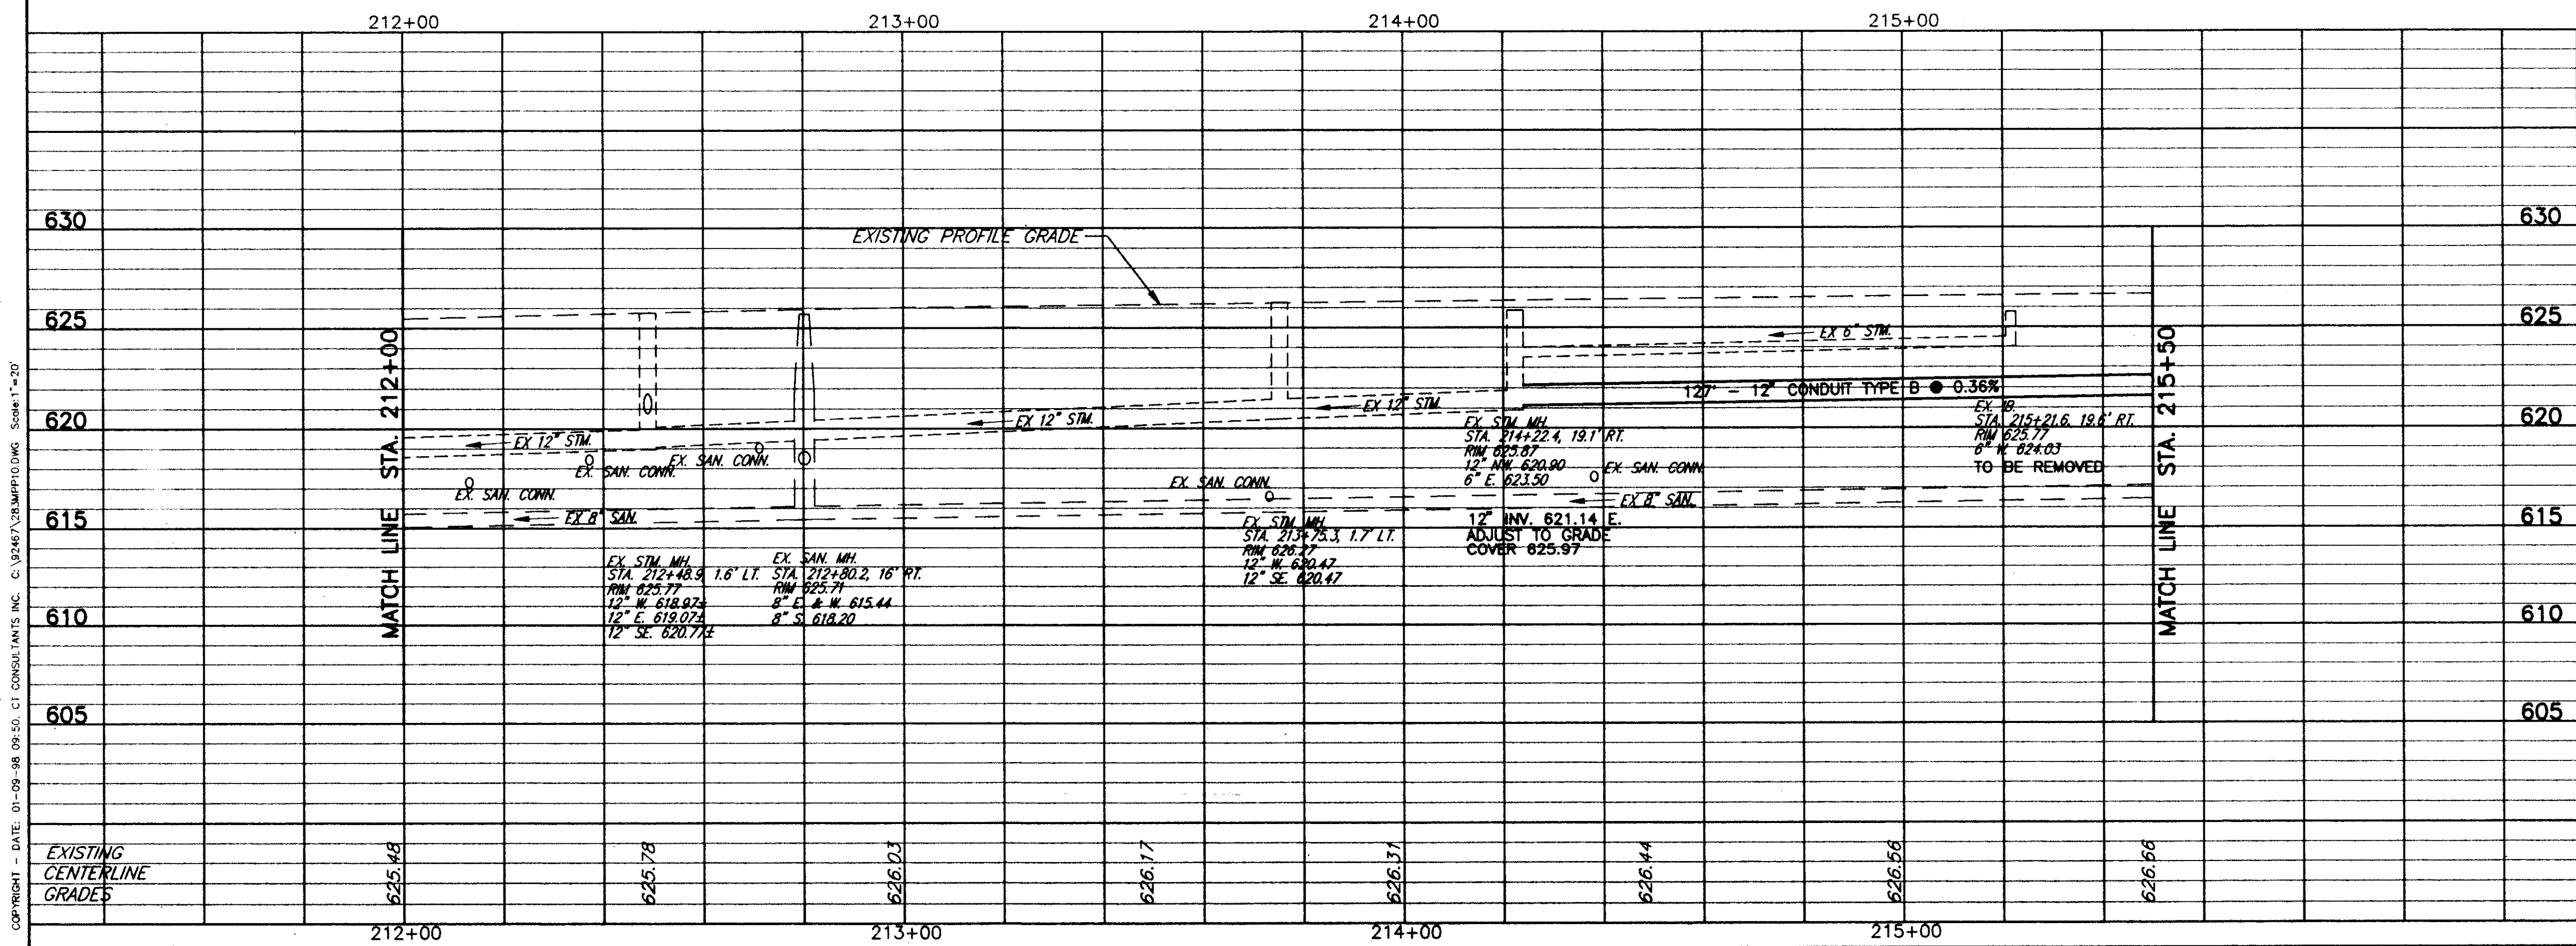

REF	LOCATION	SO. YD.	SO. FT.	IN. FT.	EACH	TOTALS
603	12" CONDUIT, TYPE B, 706.02, AS PER PLAN				1	127
604	MANHOLE ADJUSTED TO GRADE, AS PER PLAN				2	2
TOTALS						127

PLAN & PROFILE STA. 212+00 TO STA. 215+50