


ITEM NO.	DESCRIPTION	QUANTITY	UNIT	AMOUNT	UNIT PRICE	TOTAL
448	1-1/4" ASPH. CONC. SURFACE COURSE TYPE 1, PG64-22	17	SQ. YD.	17	36.5	620.5
448	0" MIN. ASPH. CONC. INTERMEDIATE COURSE TYPE 1, PG64-22	31	SQ. YD.	31	15.8	491.8
448	1-3/4" ASPH. CONC. INTERMEDIATE COURSE TYPE 2, PG64-22	23	SQ. YD.	23	10.1	232.3
411	6" STABILIZED CRUSHED AGGREGATE	4.5	SQ. YD.	4.5	7.9	35.6
408	BITUMINOUS PRIME COAT (0.40 GAL./SQ.YD.)	36.0	SQ. YD.	36.0	8.1	291.6
407	TACK COAT (0.05 GAL./SQ.YD.)	4.5	SQ. YD.	4.5	25.4	114.3
407	TACK COAT (0.10 GAL./SQ.YD.)	113.8	SQ. YD.	113.8	25.4	2890.5
304	AGGREGATE BASE, AS PER PLAN	16.0	SQ. YD.	16.0	103.4	1654.4
301	7" BITUMINOUS AGGREGATE BASE, PG64-22	17.4	SQ. YD.	17.4	36.5	635.1
254	1 1/4" PAVEMENT PLANNING, BITUMINOUS	1137.8	SQ. YD.	1137.8	98.6	112208.2
253	PAVEMENT REPAIR	9.8	SQ. YD.	9.8	15.6	152.9
203	SUBGRADE COMPACTION	16.0	SQ. YD.	16.0	15.6	250.0
203	EXCAVATION NOT INCLUDING EMBANKMENT CONSTRUCTION	197.2	SQ. YD.	197.2	507.4	99977.3
TOTALS		41.4		41.4		1137.8

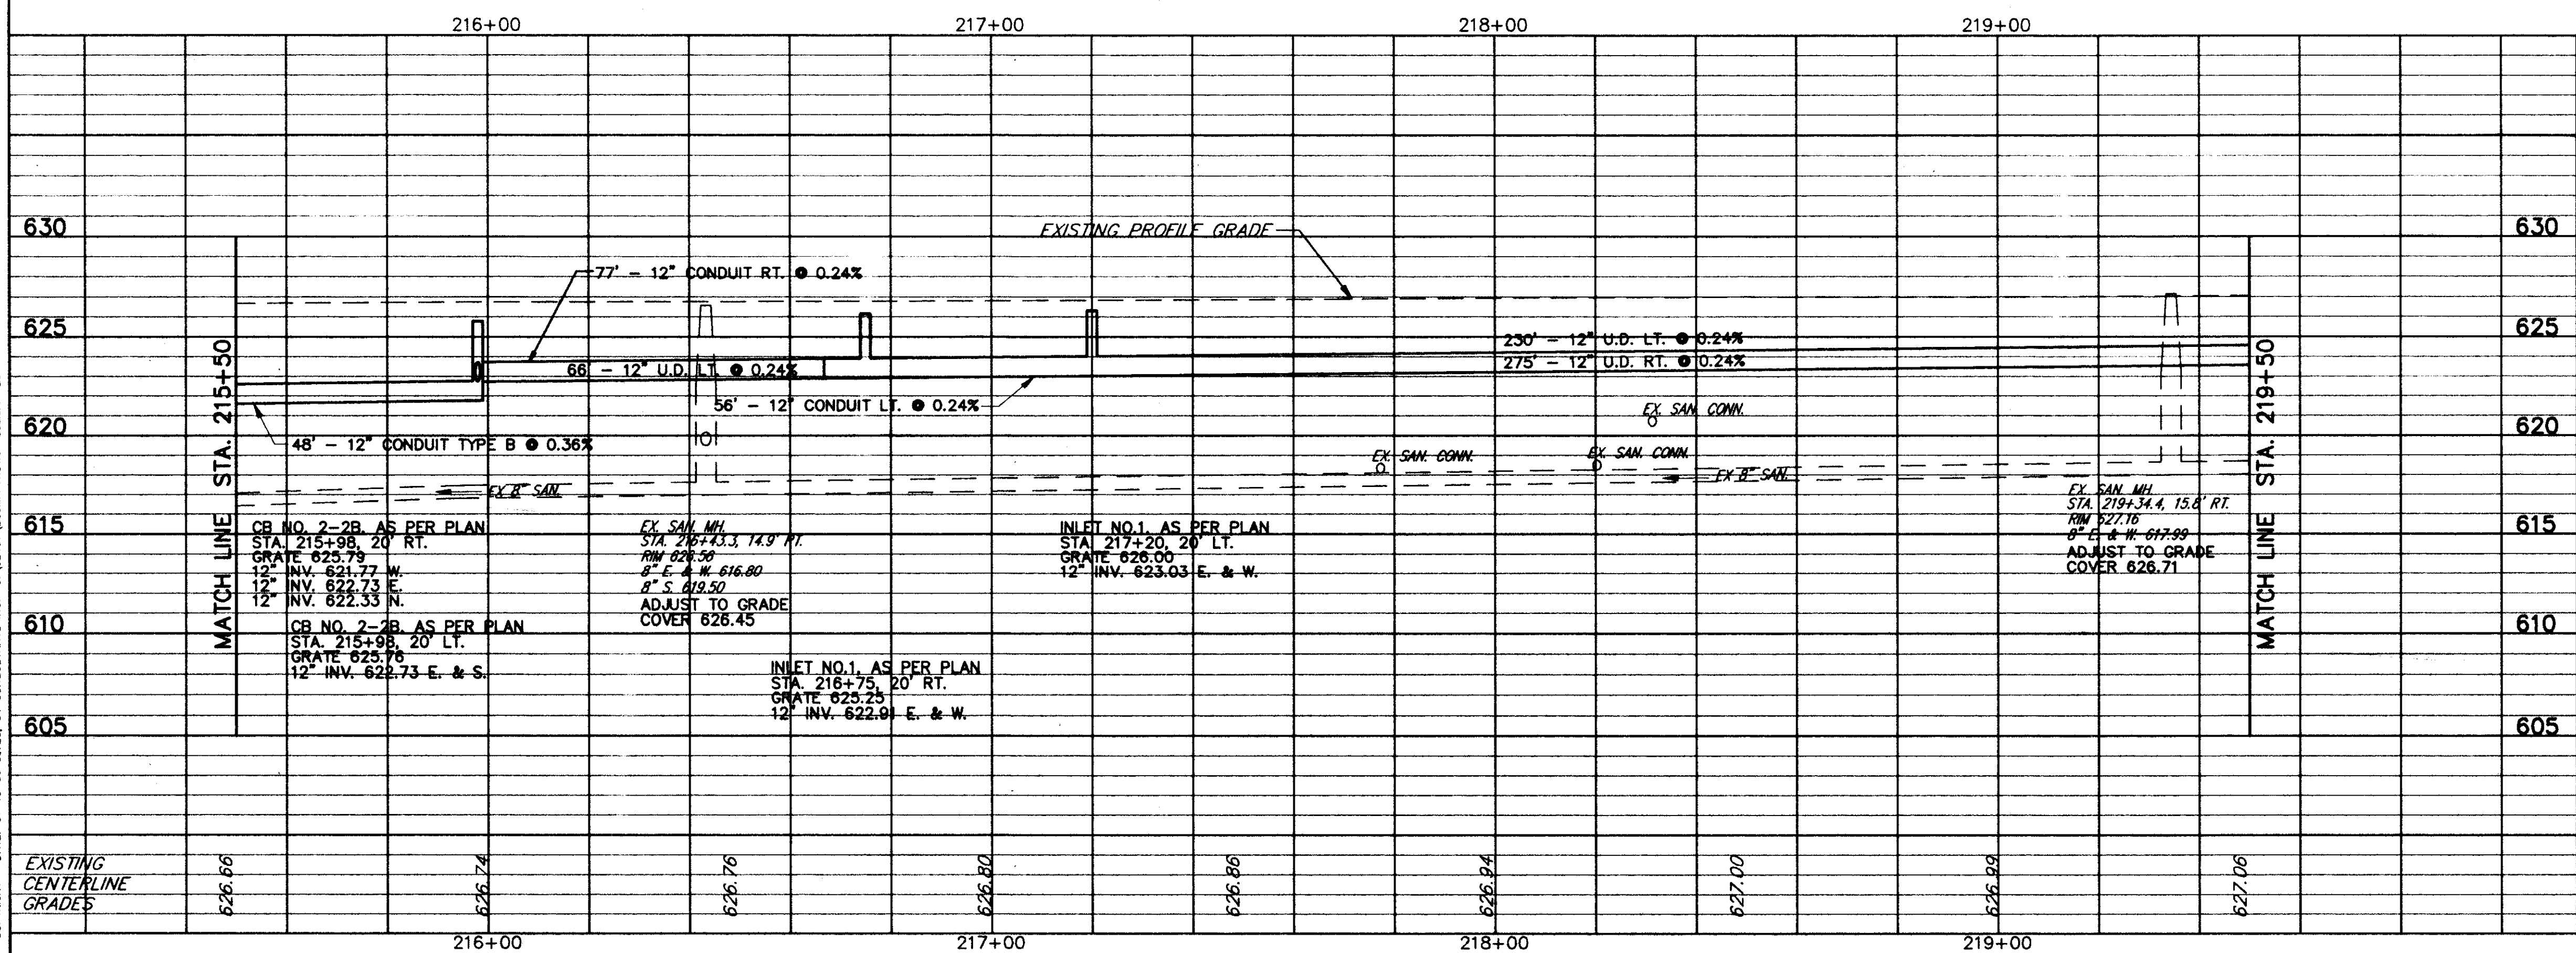

REF	LOCATION	SQ.FT.	SQ.FT.
202	WALK REMOVED		
608	4" CONCRETE WALK		
TOTALS		860	845

REF	LOCATION	LN.FT.	LN.FT.	EACH	EACH	EACH	LN.FT.
603	12" CONDUIT, TYPE B, 706.02, AS PER PLAN						
603	12" CONDUIT, TYPE F						
604	CATCH BASIN, NO. 2-28 AS PER PLAN						
604	INLET, NO. 1, AS PER PLAN						
604	MANHOLE ADJUSTED TO GRADE, AS PER PLAN						
604	12" SHALLOW PIPE UNDERDRAIN, W/ FILTER WRAP, AS PER PLAN						
TOTALS		221	30	2	2	2	541

PLAN & PROFILE STA. 215+50 TO STA. 219+50