


Item No	Station	Removal		Type		Excav. Cu. Yds.	Cast I.P. Lin. Ft.	Pipe Removed		Conc. Cu. Yds.	Reinf. Steel Lbs.	Notes	
		Type	Size	Type	Size			18"	24"				
1-C	250+97	Corr. I.P.	24"x50"	50'	Cast I.P.	16"x16"	40	166	18"	24"	2.7	Build Std. 16"x16" cast I.P. culv. Hw. R.L., open outlet on L.	
2-C	264+42	Corr. I.P.	24"x50"	50'	Cast I.P.	24"x50"	17	50	18"	24"	2.8	Remove exist. 24" corr. I.P. Build std. 24"x50" C.I.P. Build Hw. R.L.	
3-C	269+24	Corr. I.P.	18"x60"	60'	Cast I.P.	16"x52"	8	52	18"	24"	1.7	Build Std. 16"x52" Cast I.P. culv. Hw. R.L.	
4-C	273+74	Corr. I.P.	18"x60"	60'	Cast I.P.	16"x60"	19	60	18"	24"	1.7	Remove exist. 18"x60" Corr. I.P. Build Std. 16"x60" Cast I.P. culv. Hw. R.L.	
TOTALS						84	278	50	60	50	6.2	27	

GUARD RAIL (Type D) (R)			
Item No	Station	R/L	Lin. Ft.
1-R	276+25	278+25	R 200
TOTAL 200			

TREES REMOVED (over 8")		
No	Station	KIND
1	250+72	15' butternut 12R
2	250+90	14' beech 30'L
3	251+30	20' beech 15'L
4	251+75	12' hickory 15R
5	252+60	18' pine 9'R
6	252+98	12' coc. 9'R
7	253+31	10' M. 8'R
TOTAL - 7		

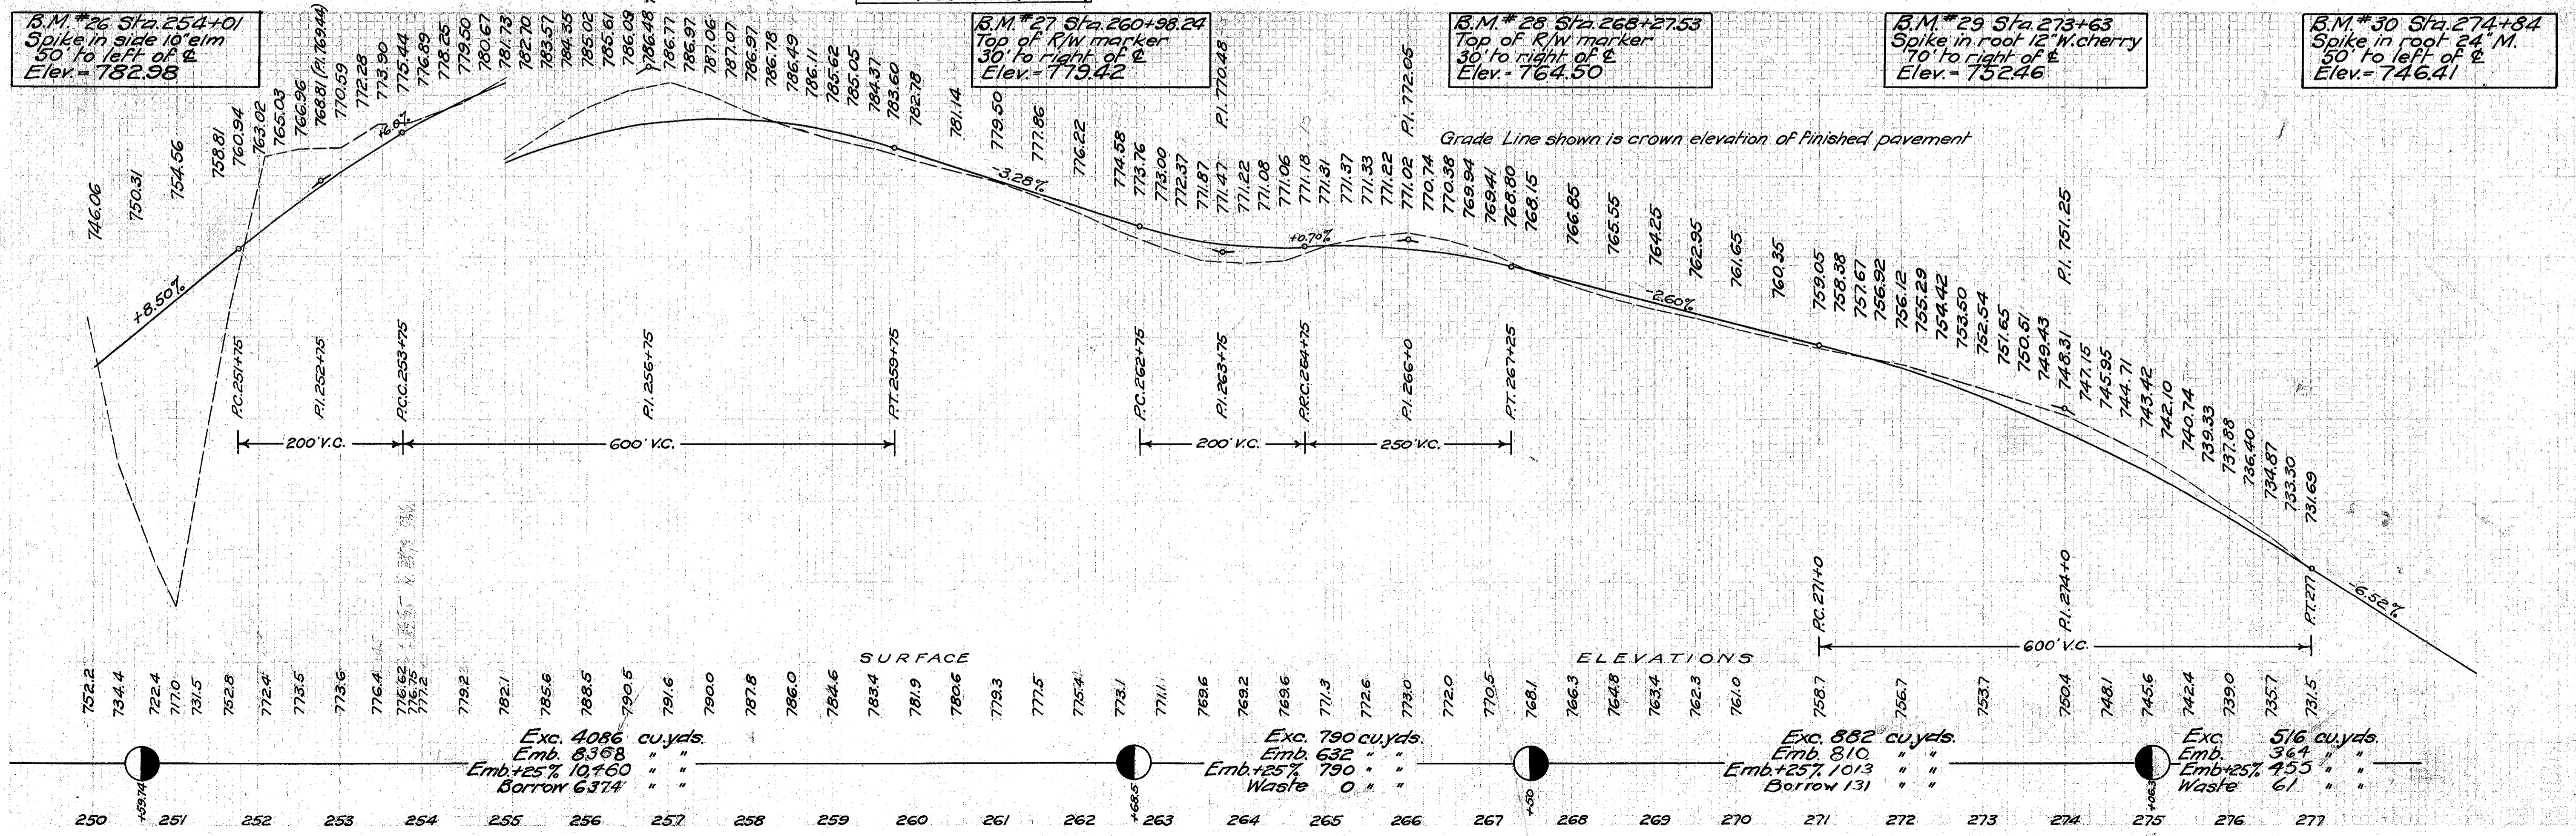

Exc. 4086 cu. yds.	Exc. 790 cu. yds.	Exc. 882 cu. yds.	Exc. 516 cu. yds.
Emb. 8368	Emb. 632	Emb. 810	Emb. 364
Emb.+25% 10460	Emb.+25% 790	Emb.+25% 1013	Emb.+25% 455
Borrow 6374	Waste 0	Borrow 131	Waste 61