J-7

CALC. BY LME DATE 4/90	LAK 306 – 7.12	OHIO FHWA REGION 5	101/452
CHKD. BY DJW DATE 4/90			

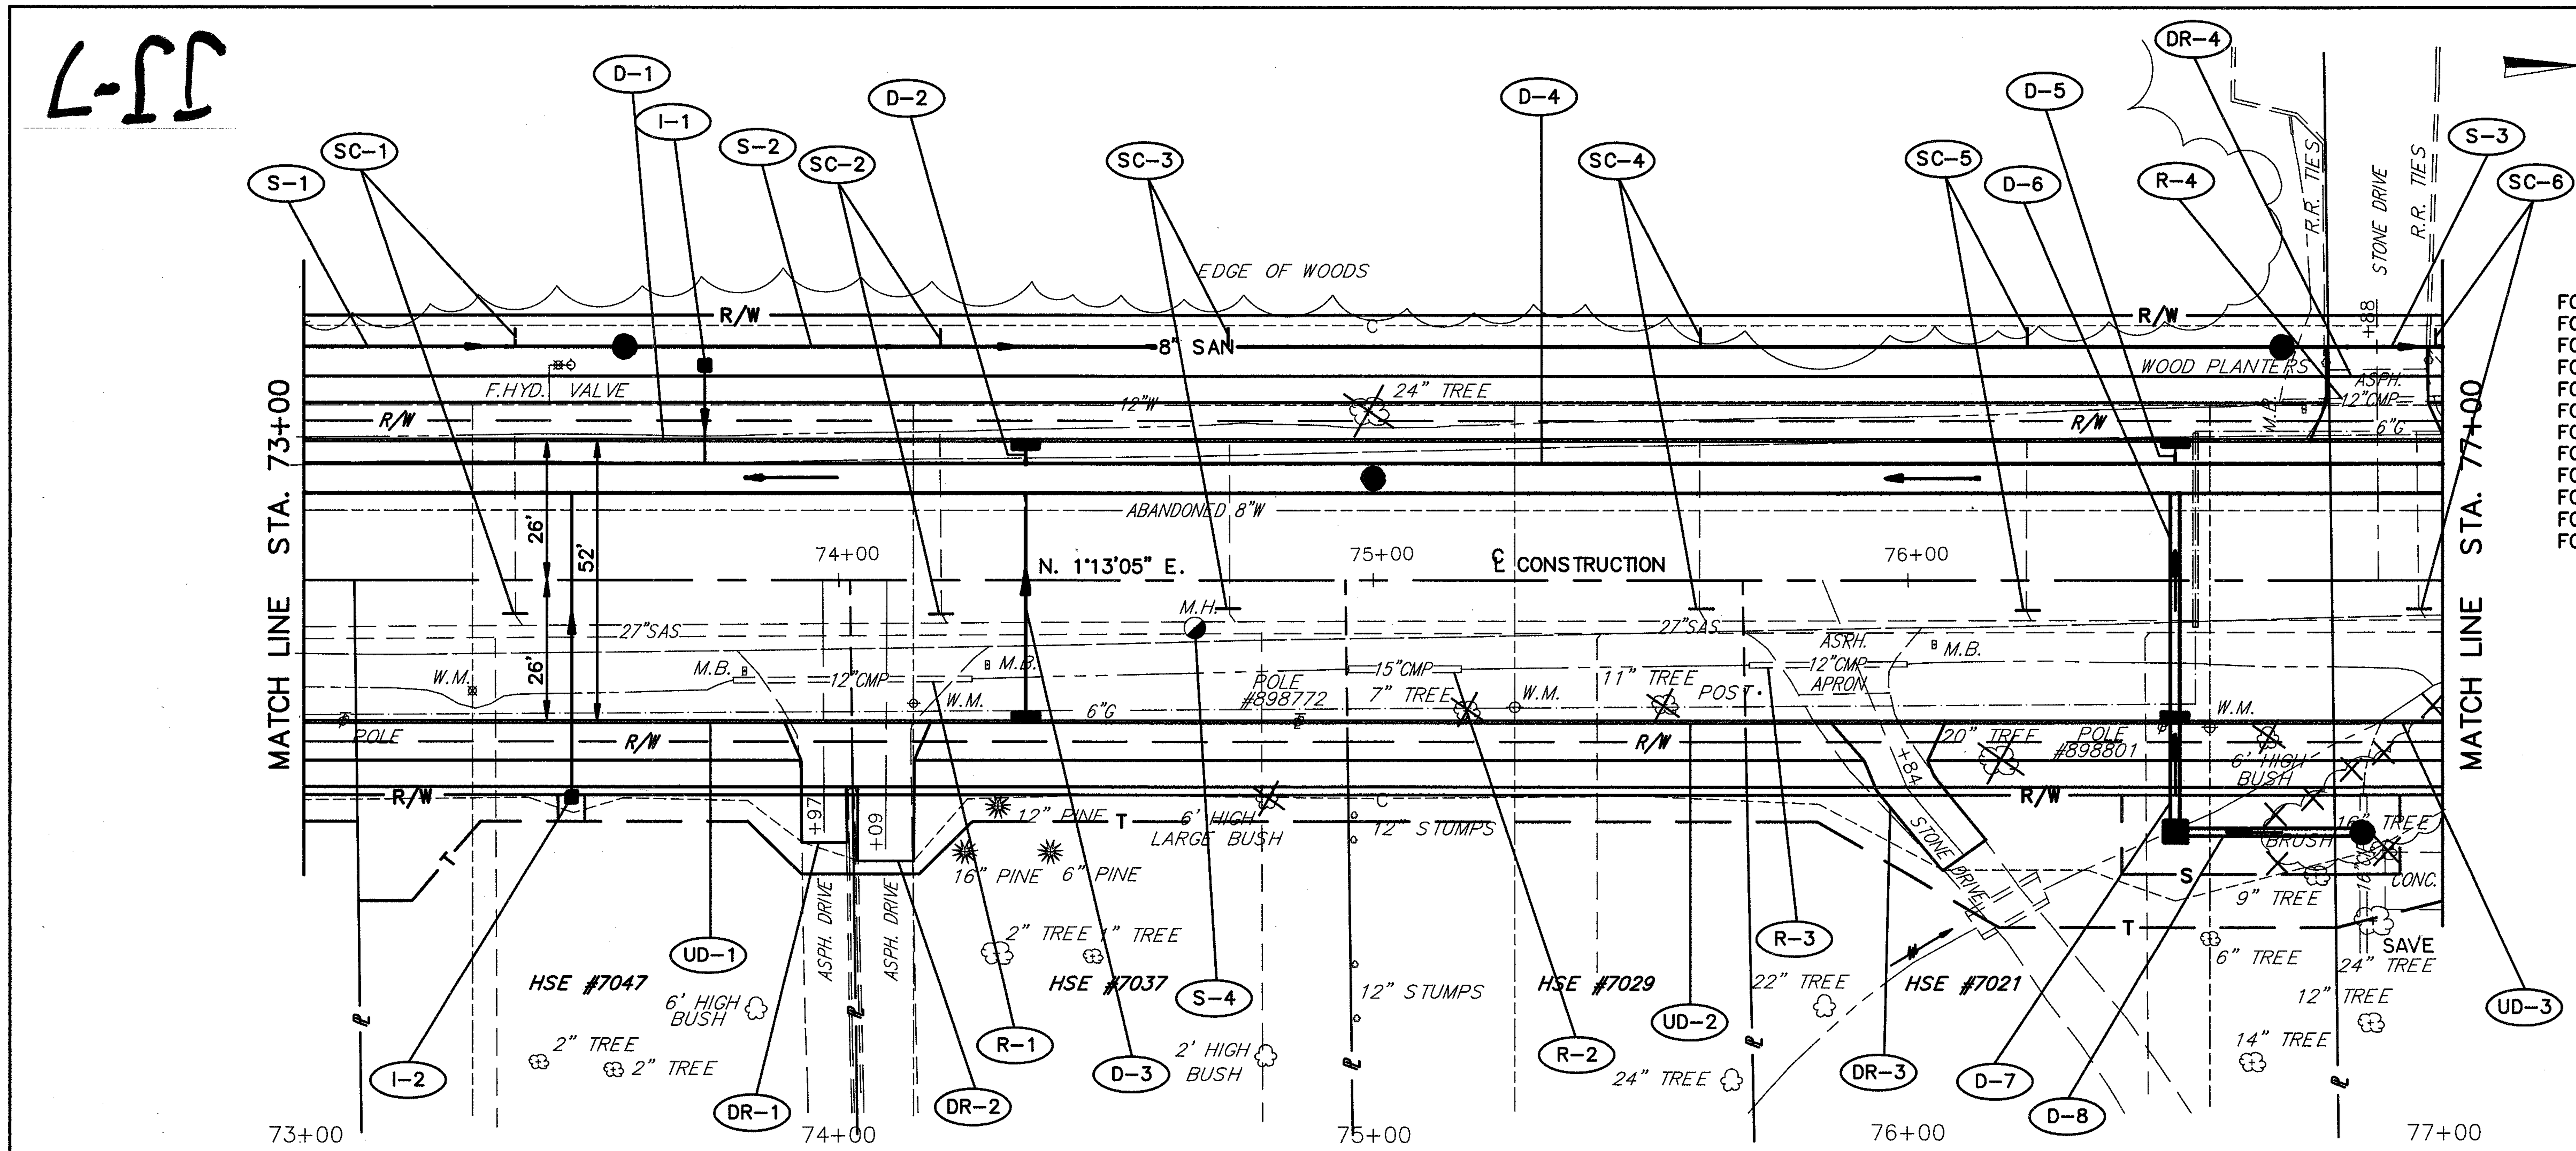

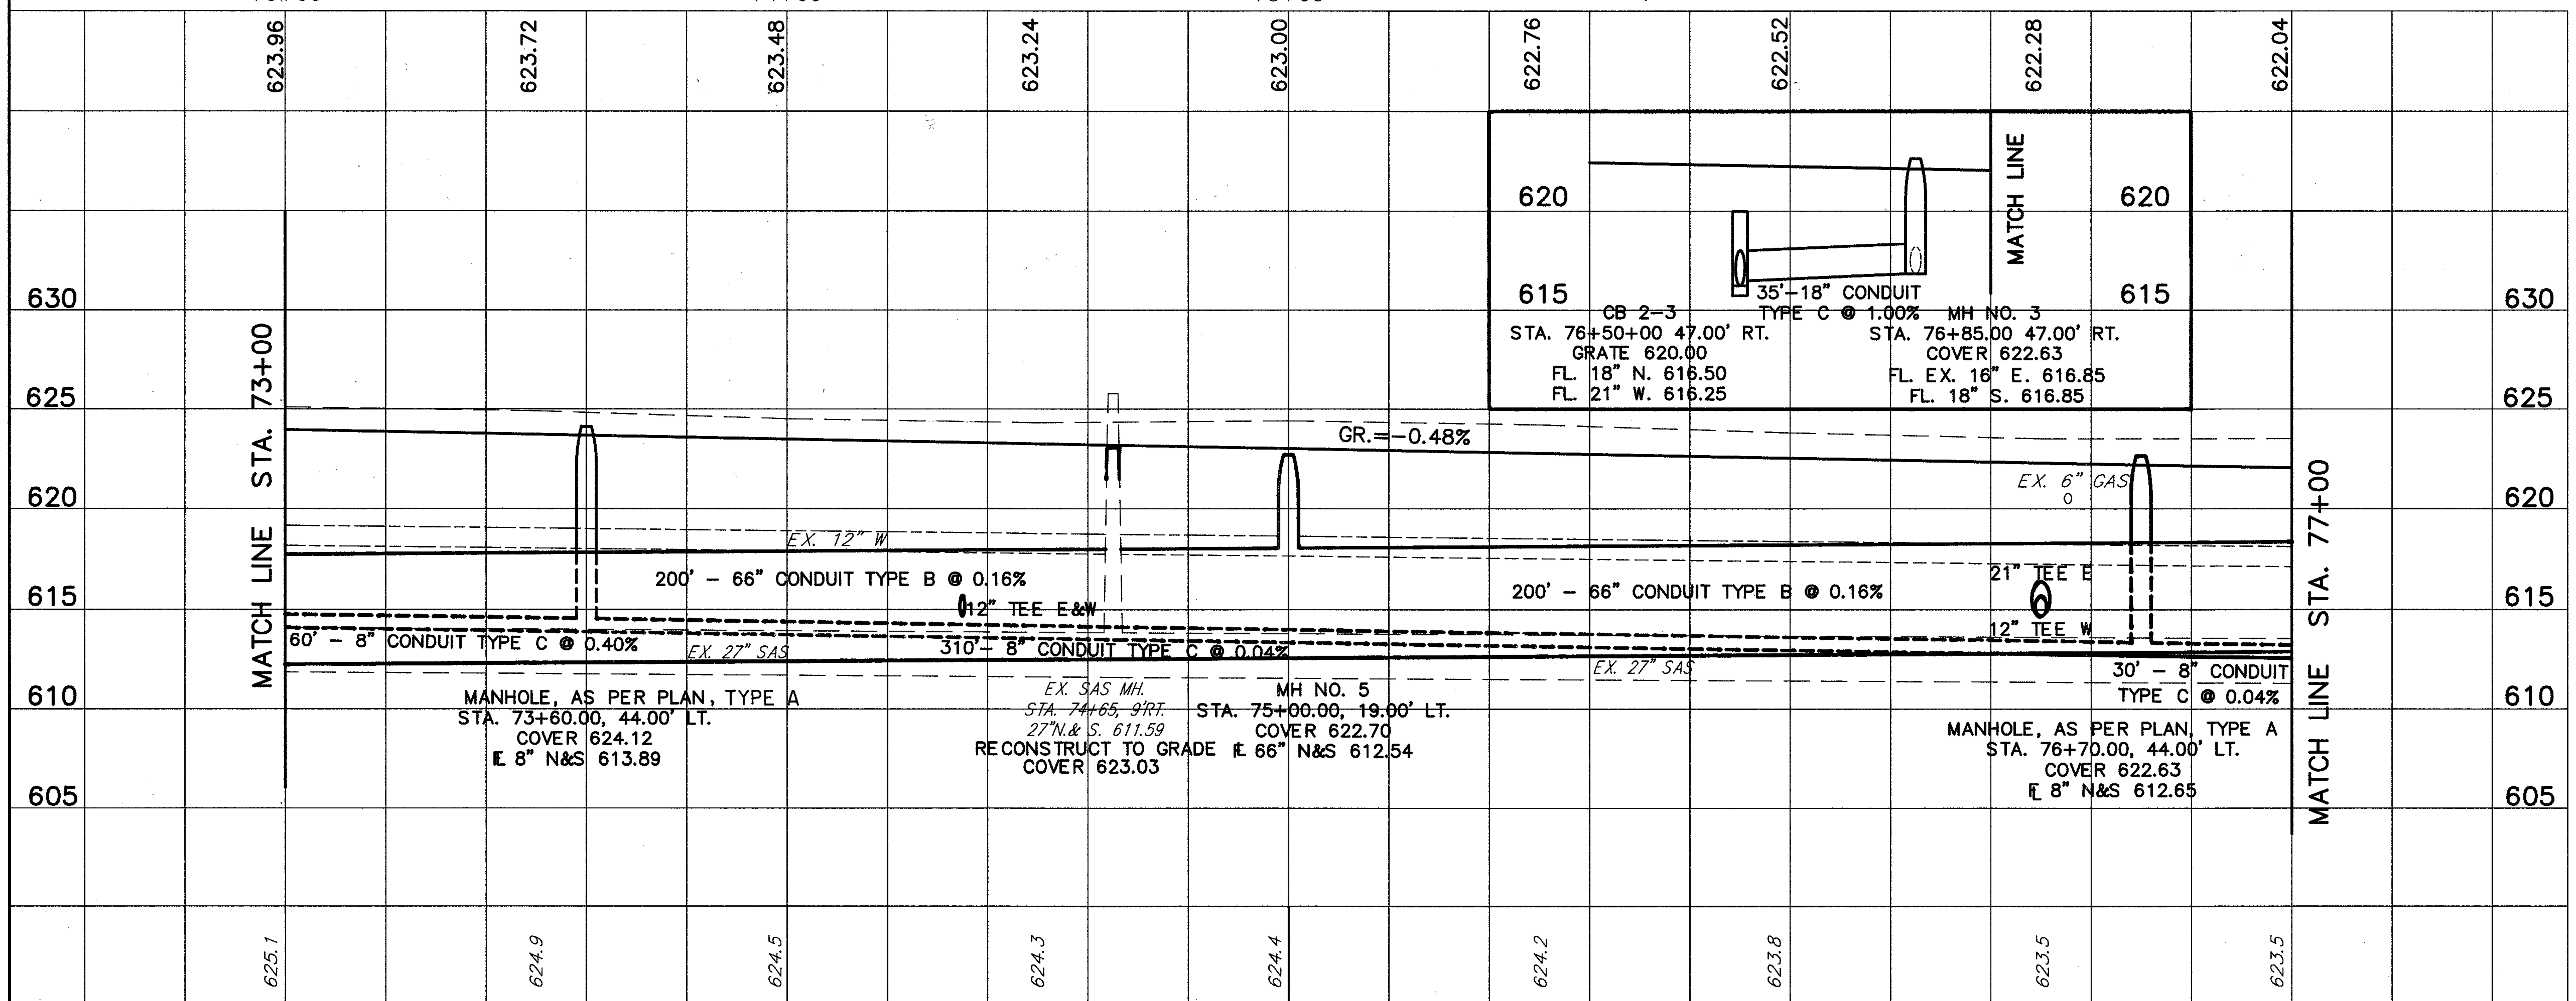

FOR TYPICAL SECTIONS SEE SHEET 6
FOR CROSS SECTIONS SEE SHEET 175-177
FOR SIGNING PLAN SEE SHEET 363-365
FOR PAVEMENT MARKING DETAILS SEE SHEET 352-353
FOR UNDERDRAIN QUANTITIES SEE SHEET 52-55
FOR CATCH BASIN DETAILS SEE SHEET 323
FOR DRIVEWAY DETAILS SEE SHEET 333-334
FOR DRIVEWAY PROFILES SEE SHEET 276
FOR STORM SEWER CONNECTION SCHEDULE SEE SHEET 68-70
FOR SANITARY SEWER CONNECTION SCHEDULE SEE SHEET 71-73
FOR I-1 INLET QUANTITIES SEE SHEET 82
FOR SANITARY SEWER DETAILS SEE SHEET 329-331

ROADWAY

REF.	LOCATION	202 PIPE REMOVED (24" & UNDER) L.F.	
R-1	STA. 73+80.00 TO STA. 74+25.00, 19' RT.	45	
R-2	STA. 74+95.00 TO STA. 75+16.00, 17' RT.	21	
R-3	STA. 75+70.00 TO STA. 76+00.00, 16' RT.	30	
R-4	STA. 76+69.00 TO STA. 77+00.00, 34' LT.	31	
	TOTALS	127	

DRAINAGE & SANITARY

REF.	LOCATION	TEE 66" X 21" X 66" EA.	TEE 66" X 12" X 66" EA.	604 MANHOLE RECONSTRUCTED TO GRADE, AS PER PLAN EA.	604 MANHOLE AS PER PLAN, TYPE A EA.	603 8" CONDUIT TYPE C AS PER PLAN 706.08 WITH JOINTS AS PER 706.12 LIN. FT.	604 CATCH BASIN NO. 2-3 AS PER PLAN EA.	604 CATCH BASIN NO. 3A AS PER PLAN EA.	604 MANHOLE NO. 5 EA.	604 MANHOLE NO. 3 EA.	603 66" CONDUIT, TYPE B 706.02 L.F.	603 21" CONDUIT, TYPE C 706.02 L.F.	603 21" CONDUIT, TYPE B 706.02 L.F.	603 18" CONDUIT, TYPE C 706.02 L.F.	603 12" CONDUIT, TYPE B 706.02 L.F.
D-1	STA. 73+00.00, 19.00' LT. TO STA. 75+00.00, 19.00' LT.		2						1		200				
D-2	STA. 74+35.00, 26.00' LT. TO STA. 74+35.00, 19.00' LT.							1							7
D-3	STA. 74+35.00, 26.00' RT. TO STA. 74+35.00, 19.00' LT.							1							45
D-4	STA. 75+00.00, 19.00' LT. TO STA. 77+00.00, 19.00' LT.	1	1								200				
D-5	STA. 76+50.00, 26.00' LT. TO STA. 76+50.00, 19.00' LT.							1							7
D-6	STA. 76+50.00, 19.00' LT. TO STA. 76+50.00, 47.00' RT.							1					45		
D-7	STA. 76+50.00, 47.00' RT. TO STA. 76+50.00, 26.00' RT.						1					21			
D-8	STA. 76+50.00, 47.00' RT. TO STA. 76+85.00, 47.00' LT.									1				35	
S-1	STA. 73+00.00, 44.00' LT. TO STA. 73+60.00, 44.00' LT.					60									
S-2	STA. 73+60.00, 44.00' LT. TO STA. 76+70.00, 44.00' LT.				1	310									
S-3	STA. 76+70.00, 44.00' LT. TO STA. 77+00.00, 30.00' LT.				1	30									
S-4	STA. 74+65.00, 9.00' RT.			1											
	TOTALS	1	3	1	2	400	1	4	1	1	400	21	45	35	59

PLAN & PROFILE STA. 73+00 TO STA. 77+00