CALC. BY	LME	DATE	4/90
CHKD. BY	D.W	DATE	4/90

LAK 306 – 7.12

OHIO
FHWA REGION 5

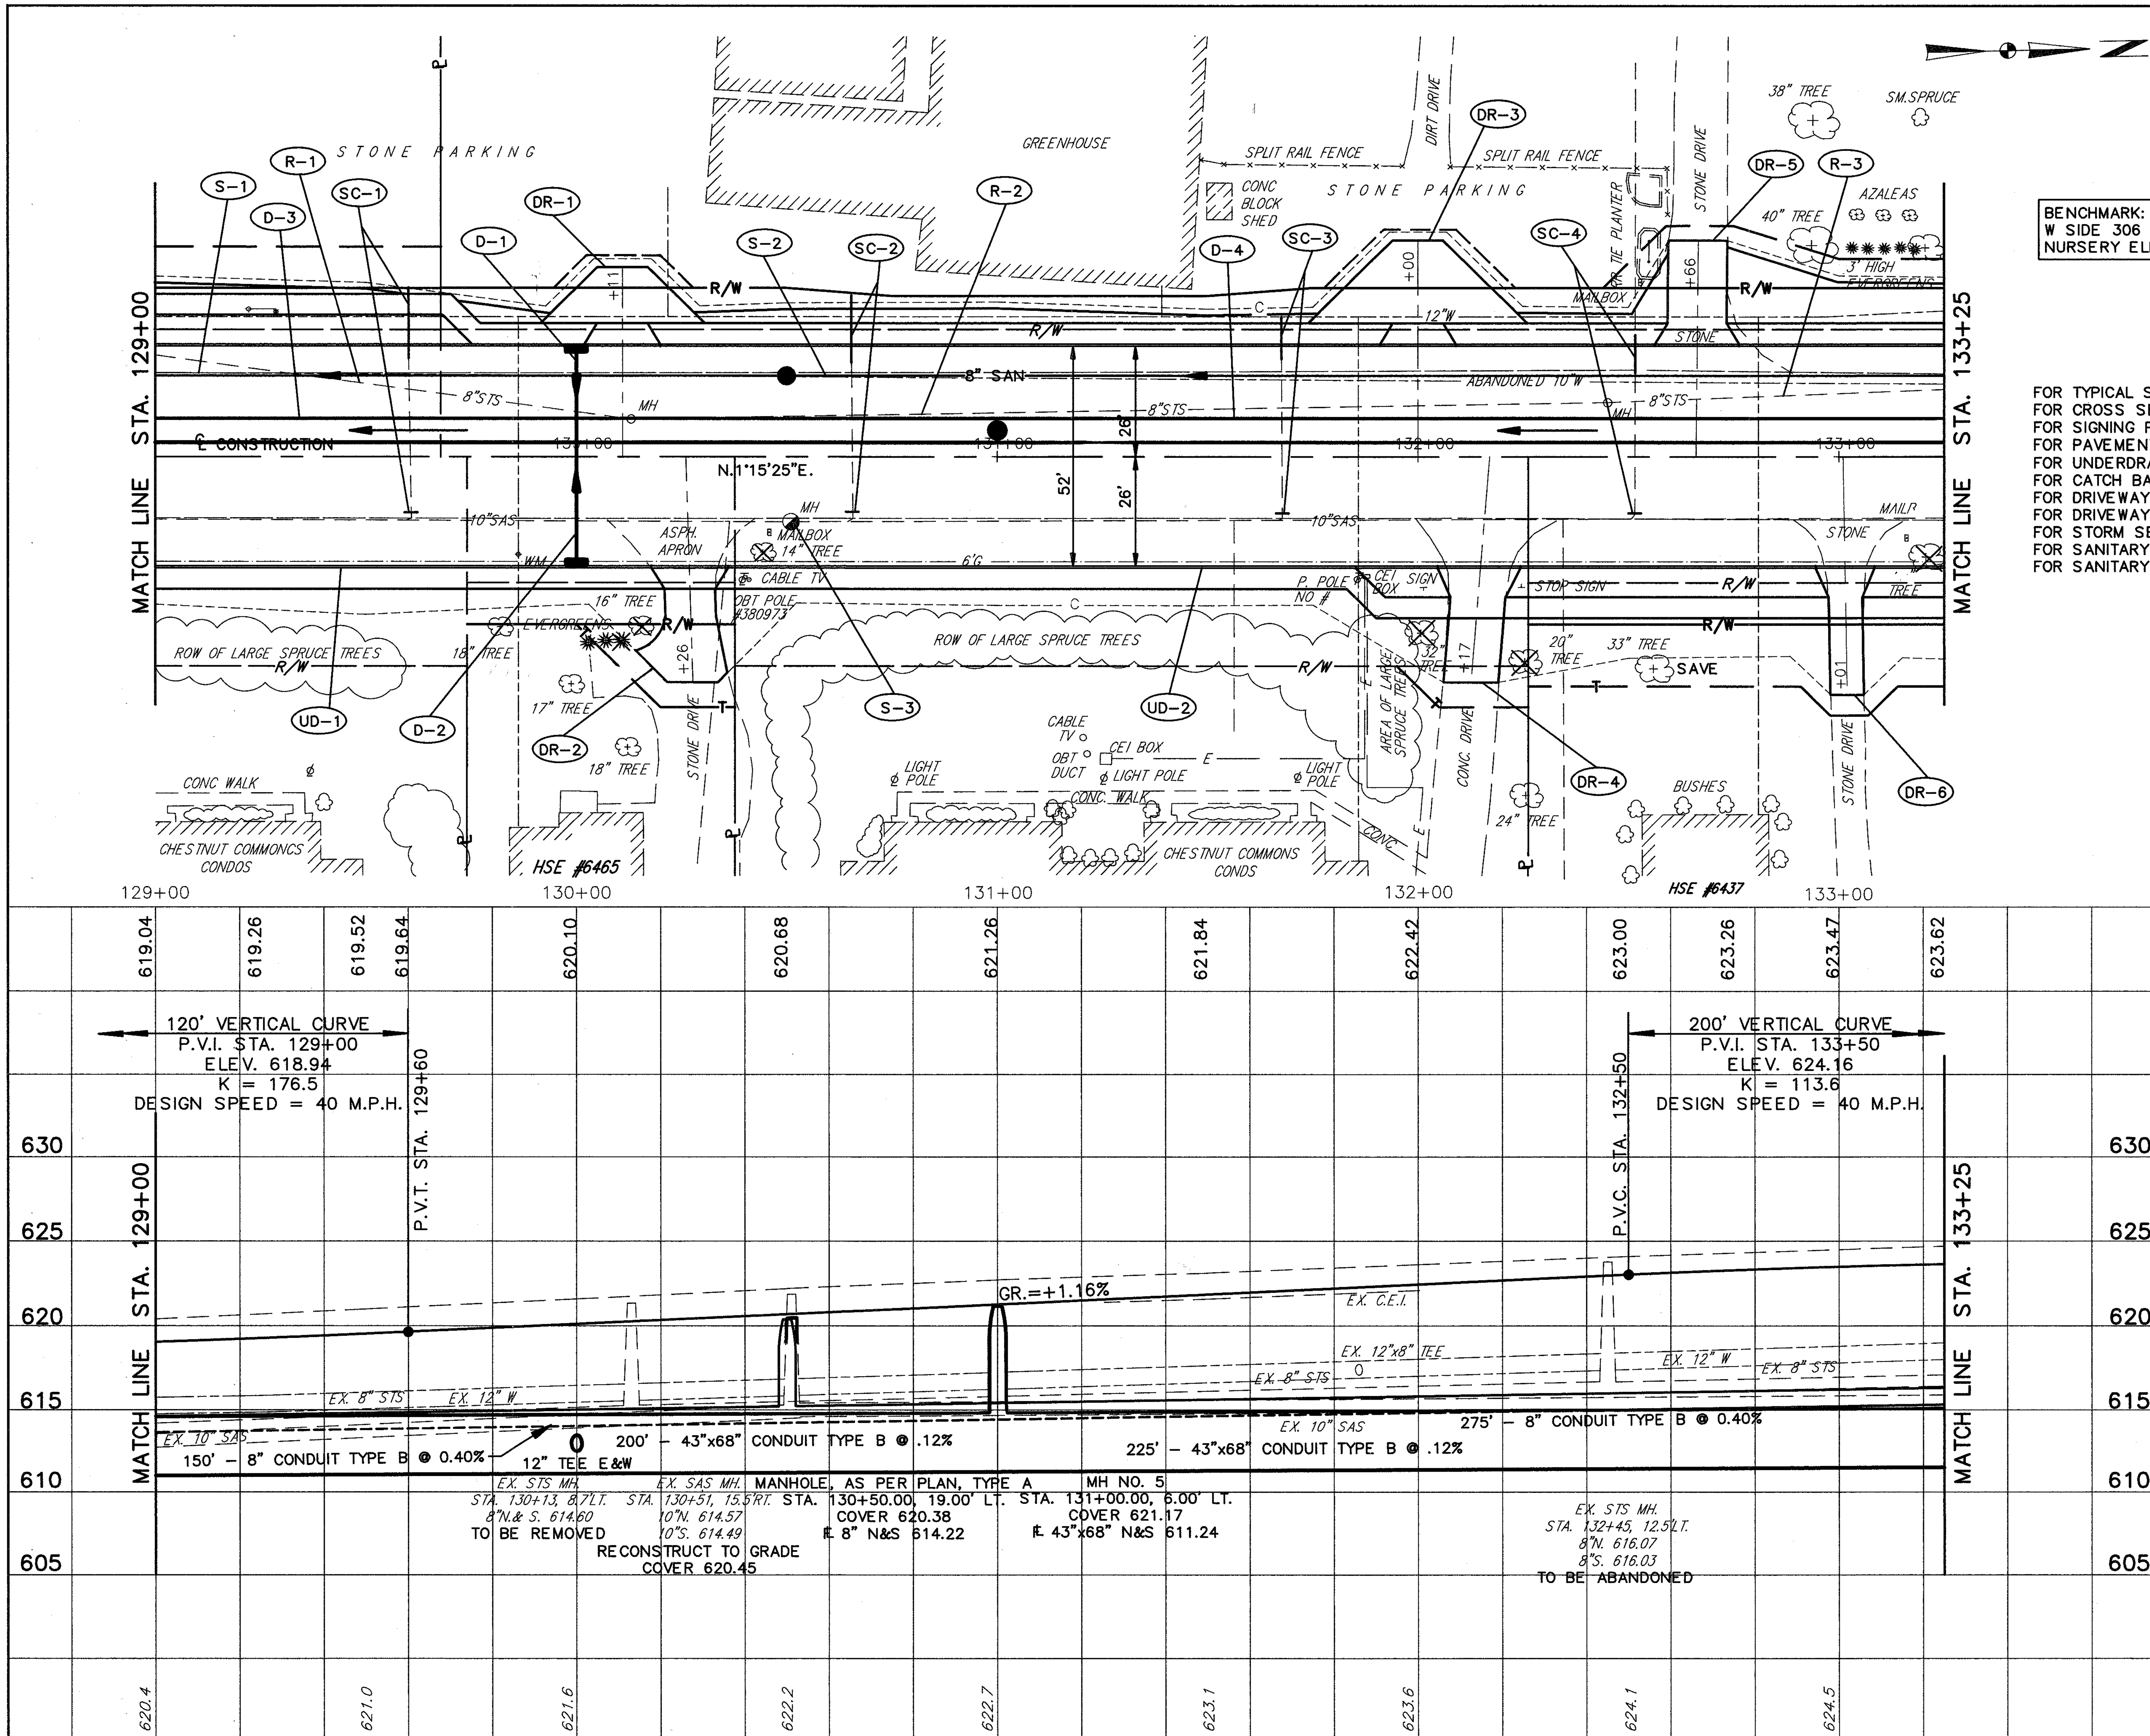

BENCHMARK: TOP OF HYDRANT W SIDE 306 SOUTH OF WYATT NURSERY ELEV. 623.75

FOR TYPICAL SECTIONS SEE SHEET 6
FOR CROSS SECTIONS SEE SHEET 207-209
FOR SIGNING PLAN SEE SHEET 363-365
FOR PAVEMENT MARKING DETAILS SEE SHEET 352-353
FOR UNDERDRAIN QUANTITIES SEE SHEET 52-55
FOR CATCH BASIN DETAILS SEE SHEET 323
FOR DRIVEWAY DETAILS SEE SHEET 333-334
FOR DRIVEWAY PROFILES SEE SHEET 287-288
FOR STORM SEWER CONNECTION SCHEDULE SEE SHEET 68-70
FOR SANITARY SEWER CONNECTION SCHEDULE SEE SHEET 71-73
FOR SANITARY SEWER DETAILS SEE SHEET 329-331

ROADWAY

REF.	LOCATION	202 MANHOLE REMOVED (EACH)	202 PIPE REMOVED (24" & UNDER) (L.F.)
R-1	STA. 129+00.00 24'LT. TO STA. 130+14.00 9'LT.	1	114
R-2	STA. 130+14.00 9'LT. TO STA. 132+45.00 13'LT.	1	232
R-3	STA. 132+45.00 13'RT. TO STA. 133+25.00 16'LT.		80
TOTALS		2	426

DRAINAGE & SANITARY

REF.	LOCATION
D-1	STA. 130+00.00, 26.00' LT. TO STA. 130+00.00, 6.00' LT.
D-2	STA. 130+00.00, 6.00' LT. TO STA. 130+00.00, 26.00' RT.
D-3	STA. 129+00.00, 6.00' LT. TO STA. 131+00.00, 6.00' LT.
D-4	STA. 129+00.00, 6.00' LT. TO STA. 133+25.00, 6.00' LT.
S-1	STA. 129+00.00, 19.00' LT. TO STA. 130+50.00, 19.00' LT.
S-2	STA. 130+50.00, 19.00' LT. TO STA. 133+25.00, 19.00' LT.
S-3	STA. 130+51.00, 15.50' RT.

Item	Description	Unit	D-1	D-2	D-3	D-4	S-1	S-2	S-3	TOTALS
	TEE (43"x68")x12"x(43"x68")				2					2
604	MANHOLE RECONSTRUCTED TO GRADE AS PER PLAN	E.A.							1	1
604	MANHOLE AS PER PLAN TYPE A	E.A.					1			1
603	8" CONDUIT TYPE B, AS PER PLAN 706.08 W/ JOINTS AS PER 706.12	L.F.					150	275		425
604	CATCH BASIN NO. 3A, AS PER PLAN	E.A.	1	1						2
604	MANHOLE NO. 5	E.A.			1					1
603	43" x 68" CONDUIT TYPE B, 706.04 CLASS HE I WITH JOINTS AS PER 706.11	L.F.			200	225				425
603	12" CONDUIT, TYPE B, 706.02 WITH JOINTS AS PER 706.11	L.F.	20	32						52