




FOR TRAFFIC CONTROL GENERAL SUMMARY SEE SHEET NO. 336-337

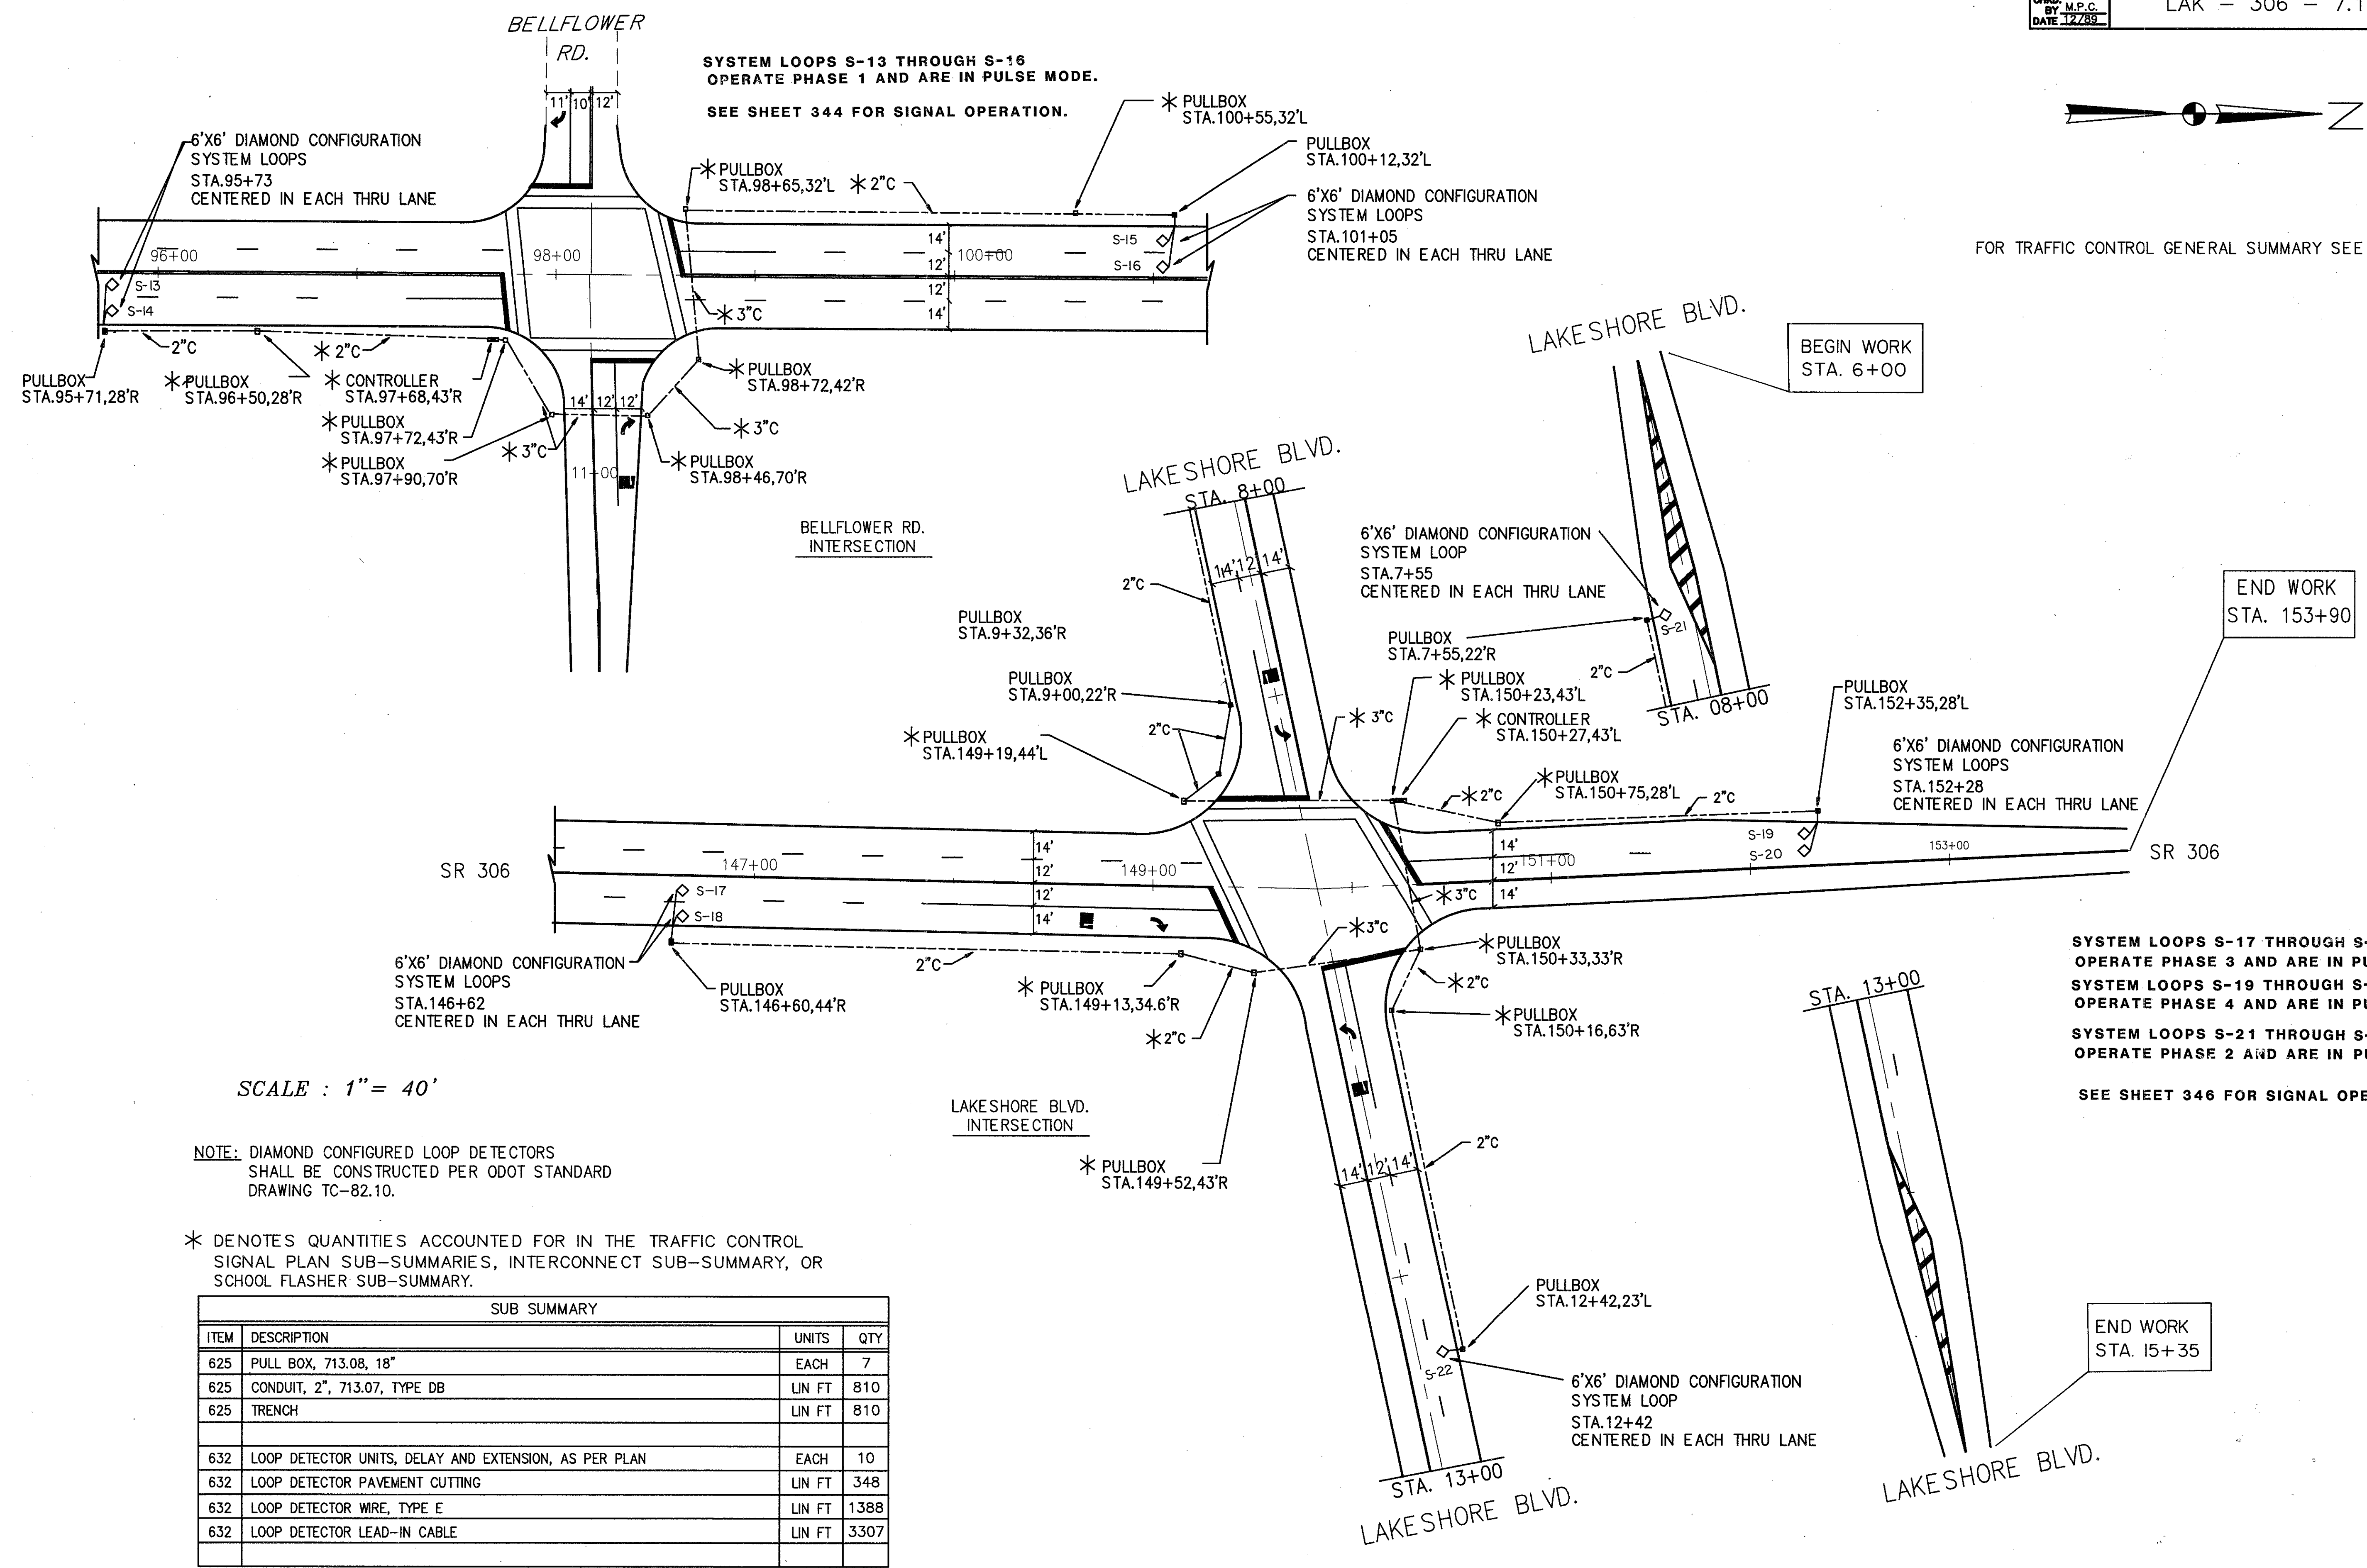

SUB SUMMARY			
ITEM	DESCRIPTION	UNITS	QTY
625	PULL BOX, 713.08, 18"	EACH	7
625	CONDUIT, 2", 713.07, TYPE DB	LIN FT	810
625	TRENCH	LIN FT	810
632	LOOP DETECTOR UNITS, DELAY AND EXTENSION, AS PER PLAN	EACH	10
632	LOOP DETECTOR PAVEMENT CUTTING	LIN FT	348
632	LOOP DETECTOR WIRE, TYPE E	LIN FT	1388
632	LOOP DETECTOR LEAD-IN CABLE	LIN FT	3307