


**MODIFIED STD. H.W. "C" HEADWALL**  
STA. 2.94+20


SHOWING ARRANGEMENT OF STEEL AROUND OUTLET FOR 15" PIPE. NO CHANGE IN STEEL LIST FROM THAT SHOWN FOR STD. H.W. "C" HEADWALL FOR R' (59" 66").

CONCRETE 22 Cu. Yds.  
\* REINF. STEEL 977 LBS.  
\* Included in unit price bid for masonry item.

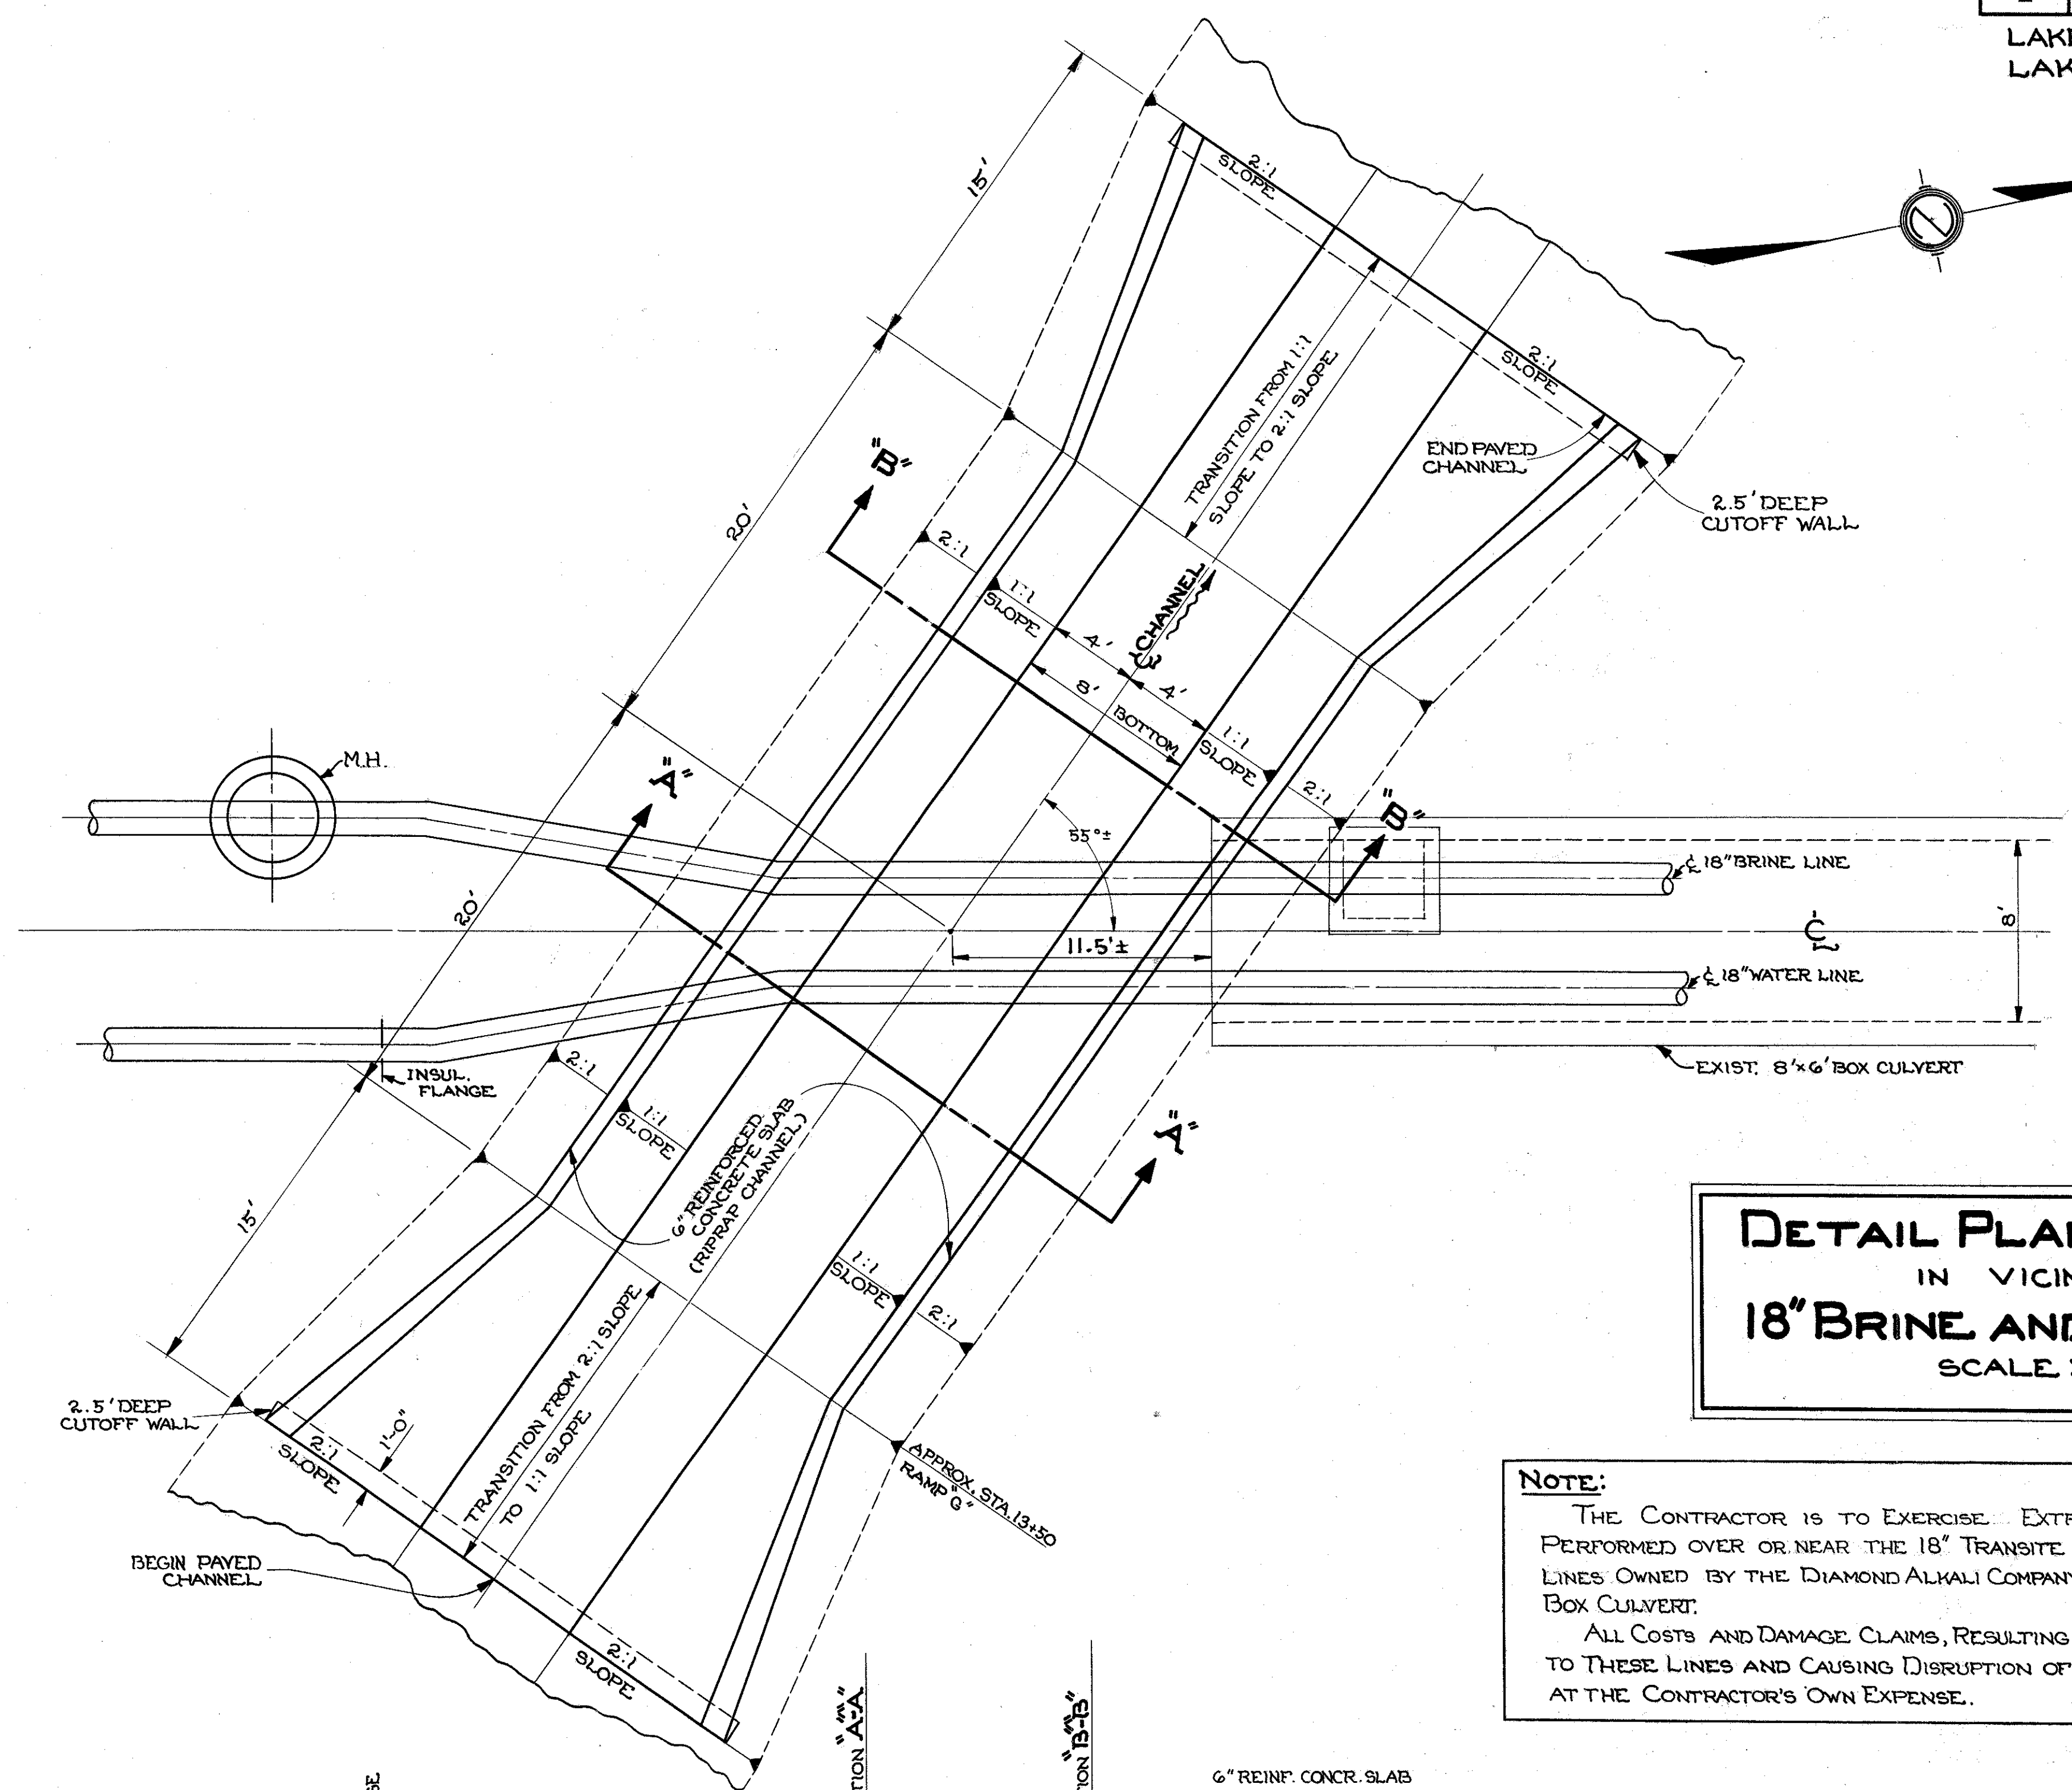

**DETAIL PLAN FOR CHANNEL**  
IN VICINITY OF  
**18" BRINE AND WATER LINES**  
SCALE: 1" = 5'-0"

**NOTE:**  
THE CONTRACTOR IS TO EXERCISE EXTREME CAUTION IN ANY WORK PERFORMED OVER OR NEAR THE 18" TRANSITE BRINE AND 18" STEEL WATER LINES OWNED BY THE DIAMOND ALKALI COMPANY, AT EITHER END OF THE BOX CULVERT.  
ALL COSTS AND DAMAGE CLAIMS, RESULTING FROM ANY DAMAGE OR RUPTURE TO THESE LINES AND CAUSING DISRUPTION OF THEIR SERVICE, SHALL BE AT THE CONTRACTOR'S OWN EXPENSE.

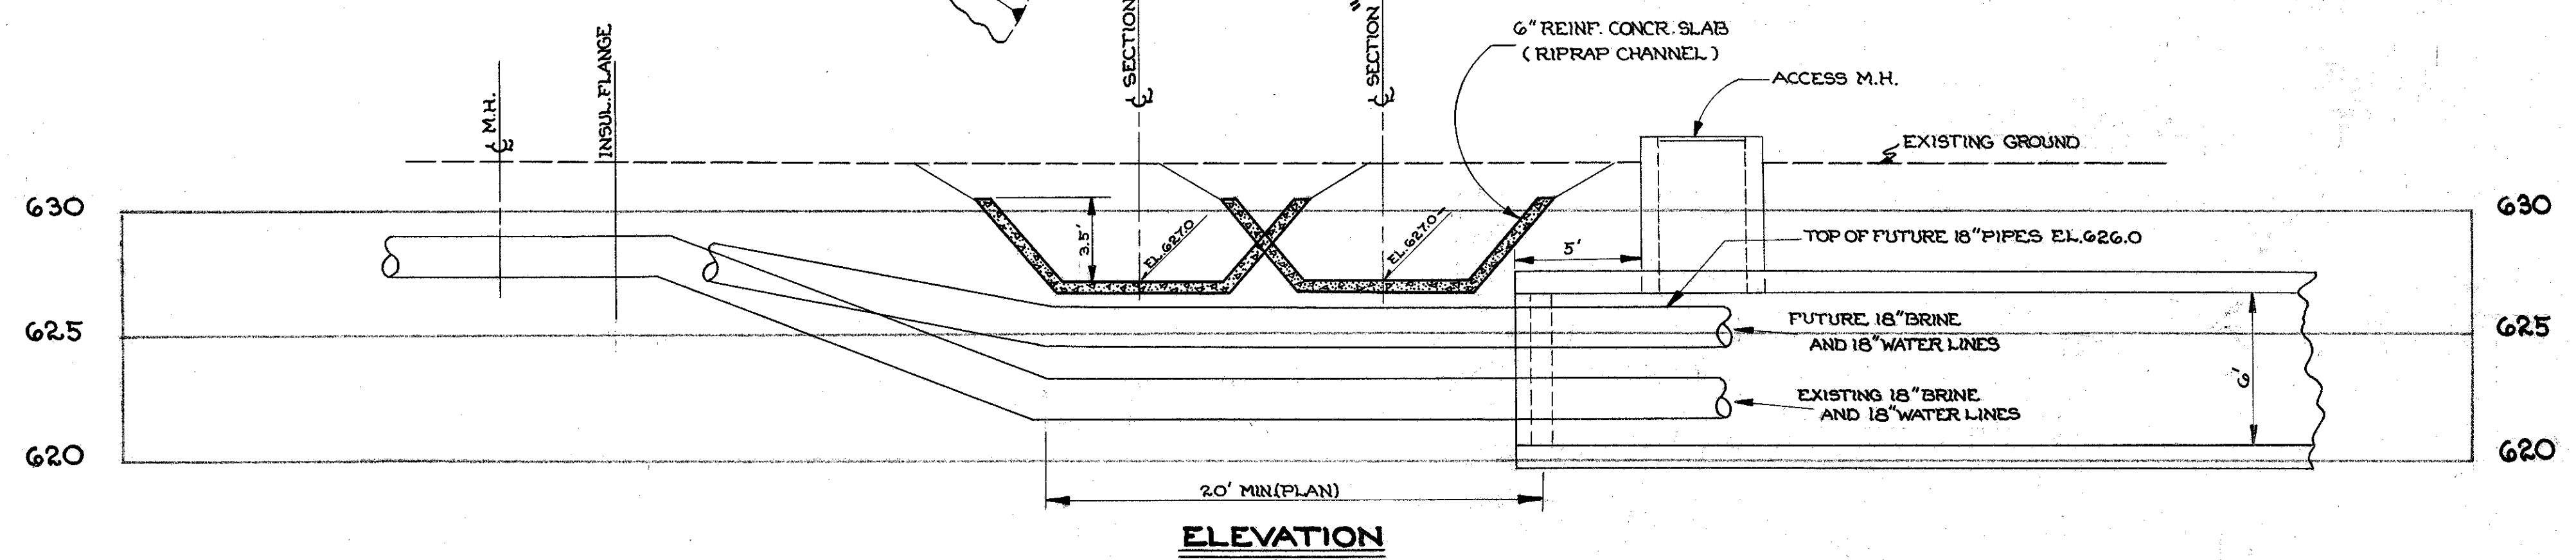

**ELEVATION**