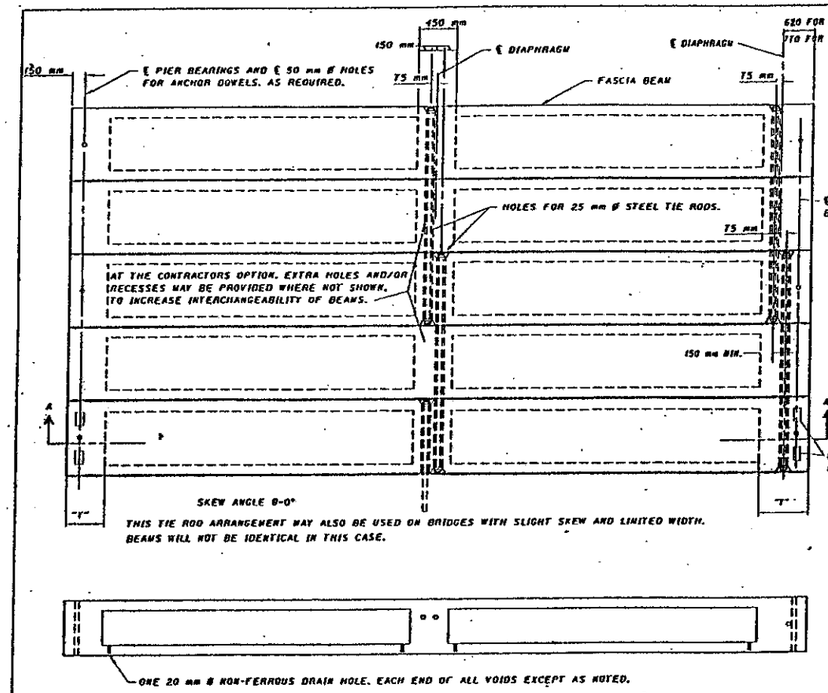

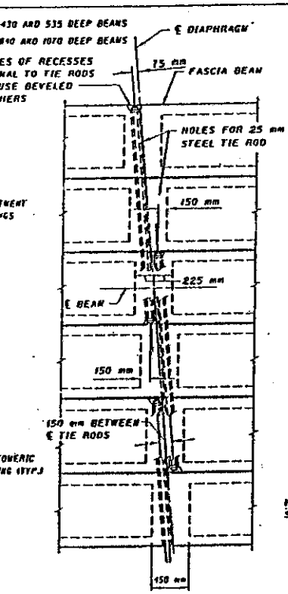

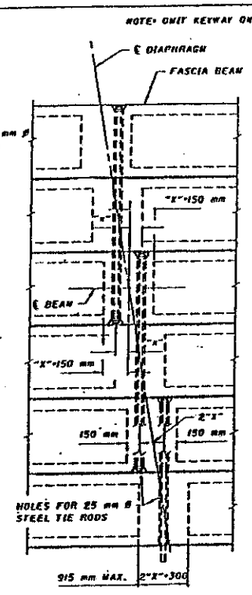

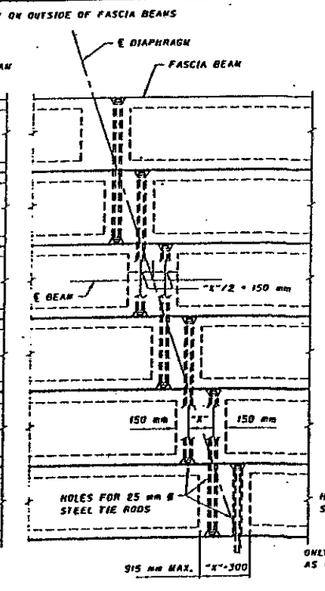

"Y" SEE SHEET 1 OF 4 FOR DETAILS OF BEAM ENDS.

"X" BEAM WIDTH TIMES TAN Θ

SEE PROJECT PLANS FOR THE NUMBER AND LOCATION OF DIAPHRAGMS.

VOIDS SHALL BE VENTED TO PREVENT HEAVING OF THE TOP FLANGE DURING CURING.

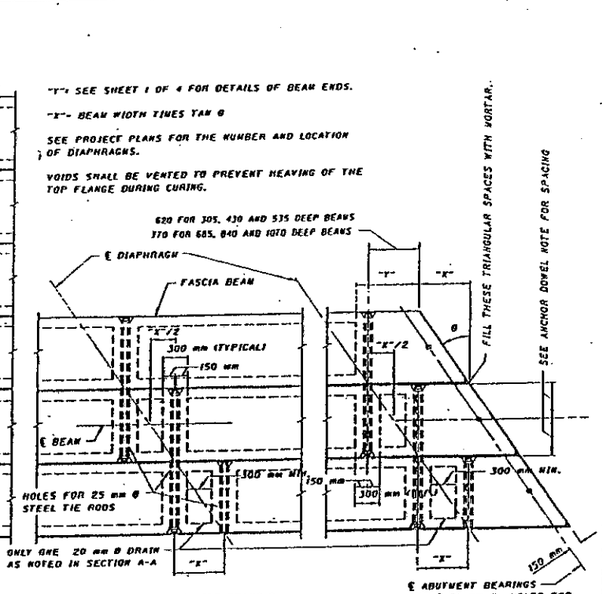

0'-0" TO 5° FOR 915 WIDE BEAMS *
0'-0" TO 4° FOR 1220 WIDE BEAMS *

Θ OVER 5° TO 18° FOR 915 WIDE BEAMS *
Θ OVER 4° TO 14° FOR 1220 WIDE BEAMS *

Θ OVER 18° TO 33° FOR 915 WIDE BEAMS *
Θ OVER 14° TO 26° FOR 1220 WIDE BEAMS *

Θ OVER 33° FOR 915 WIDE BEAMS *
Θ OVER 26° FOR 1220 WIDE BEAMS *

* AS AN OPTION THE FABRICATOR MAY MAKE PROVISION FOR GREATER INTERCHANGEABILITY OF INTERIOR BEAMS BY FURNISHING DOUBLE TIE ROD HOLES IN THE DIAPHRAGMS AND PERMITTING ONE TIE ROD TO TIE TWO BEAMS TOGETHER.

TYPICAL PLANS OF DIAPHRAGMS AND TRANSVERSE TIE RODS

SECTION A-A

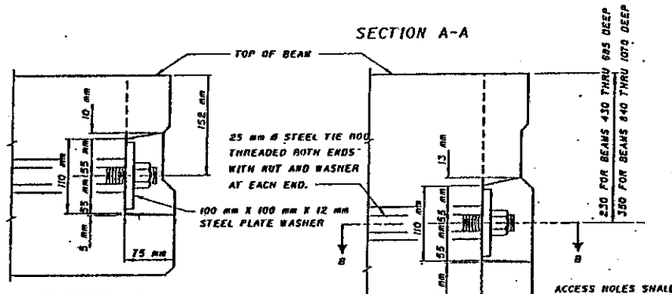

ACCESS HOLES SHALL BE PROVIDED AS REQUIRED TO PERMIT PLACEMENT OF WASHERS AND NUTS UNLESS THE CONTRACTOR ELECTS TO THREAD BEAMS OVER RODS PROJECTING FROM BEAMS PREVIOUSLY PLACED. WHEN USED, HOLES SHALL BE THE SAME SHAPE AS THE RECESSES SHOWN IN SECTION B-B.

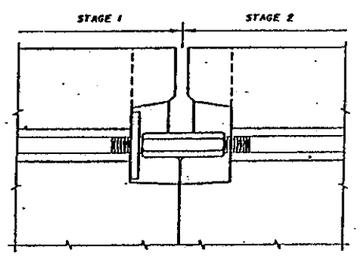

SLEEVE NUT 75 mm OR 125 mm LONG, WITH RIGHT HAND THREADS. (MADE FROM HEX. OR SQUARE STOCK, 40 mm MIN. ACROSS FLATS)

FOR STAGE CONSTRUCTION



AFTER TIE RODS ARE TIGHTENED FILL RECESSES IN FASCIA BEAM FLUSH WITH FACE OF BEAM WITH NON-SHRINKING MORTAR.

SECTION B-B (ALL BEAMS)

END DETAILS OF TRANSVERSE TIE ROD ANCHORAGE

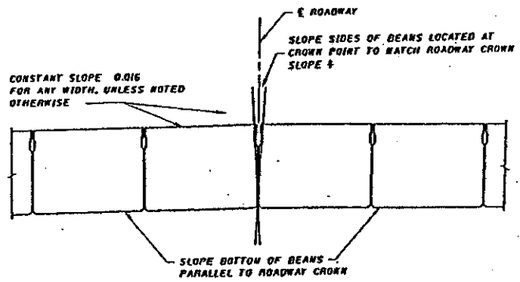

JOINT AT ℄ ROADWAY

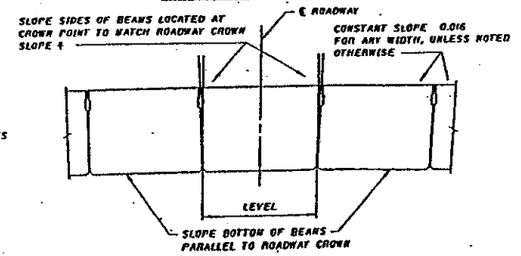

JOINT OFFSET FROM ℄ ROADWAY

† REQUIRED ONLY FOR ROADWAY CROWN SLOPES OF .006 OR GREATER.

NORMAL CROWN TREATMENT AT ℄ ROADWAY

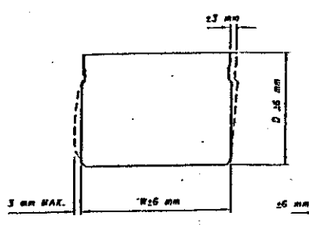

SECTION C-C

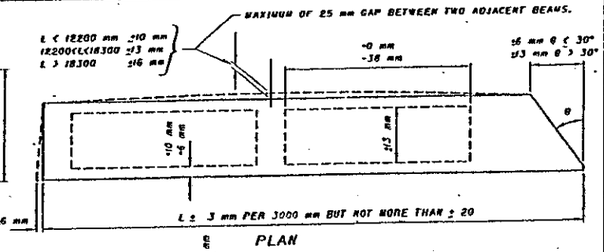

PLAN

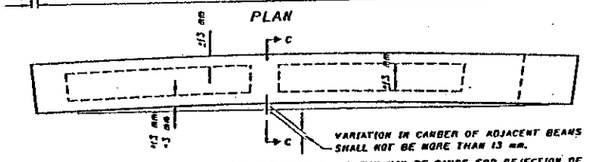

DIMENSIONAL VARIATION IN EXCESS OF THE TOLERANCES SHOWN MAY BE CAUSE FOR REJECTION OF THE MEMBER. GENERALLY THE DIMENSIONS SHOULD BE WELL WITHIN THE TOLERANCE LIMIT.

ELEVATION

BEAM DIMENSIONAL TOLERANCES

ADDITIONAL TOLERANCES
POSITION OF HOLES FOR ANCHOR DOWELS AND TIE RODS ± 13 mm
POSITION OF GUARDRAIL ANCHORS ± 13 mm
POSITIONS OF LIFTING INSERTS ± 150 mm
CENTER OF GRAVITY OF STRAND GROUP ± 6 mm
CENTER OF GRAVITY OF DRAPED STRAND GROUP AT END OF BEAM ± 13 mm
SPACING OF STIRRUP BARS ± 25 mm
LONGITUDINAL SCUPPER LOCATION ± 150 mm

HOLES IN BEAMS FOR TRANSVERSE TIE RODS SHALL BE NOT LESS THAN 50 mm Ø AND NOT MORE THAN 75 mm Ø.

DIMENSIONS OF RECESSES IN FASCIA BEAMS AND SHEAR KEYS AND VERTICAL LOCATION OF TRANSVERSE TIE RODS MAY VARY FROM THE DIMENSIONS SHOWN HEREON, SUBJECT TO APPROVAL BY THE DIRECTOR.

ALL DIMENSIONS ARE IN mm.

REVISIONS

STATE OF OHIO
DEPARTMENT OF TRANSPORTATION
BUREAU OF BRIDGES AND STRUCTURAL DESIGN

STANDARD

PRESTRESSED CONCRETE BOX BEAM BRIDGE DETAILS

APPROVED: Richard P. Fogel — ENGINEER OF BRIDGES
DATE: 12-19-94
DRAWING NO. PSBD-1-93M

PREPARED	DRAWN	CHECKED	REVIEWED	SHEET NO. 2 OF 4 SHEETS
MRG	REF	SEM	LMW	