


STA.	LEFT EDGE ELEV.	WIDTH	RIGHT EDGE ELEV.	WIDTH	
83+00	823.77	11.00'	823.69	823.40	11.00'
83+25	824.41	11.00'	824.21	823.86	11.00'
83+50	825.07	11.00'	824.74	824.33	11.00'
83+75	825.70	11.00'	825.26	824.83	11.00'
84+00	826.24	11.00'	825.78	825.32	11.00'
84+25	826.73	11.00'	826.27	825.81	11.00'
84+50	827.15	11.00'	826.69	826.23	11.00'
84+75	827.50	11.00'	827.04	826.58	11.00'
85+00	827.70	11.00'	827.34	826.93	11.00'
85+25	827.80	11.00'	827.55	827.19	11.00'
85+50	827.86	11.00'	827.71	827.40	11.00'
85+75	827.84	11.00'	827.80	827.54	11.00'
86+00	827.76	11.00'	827.83	827.62	11.00'
86+25	827.61	10.75'	827.78	827.61	10.75'
86+50	827.46	10.50'	827.67	827.48	10.50'
86+75	827.24	10.25'	827.49	827.27	10.25'
87+00	826.96	10.00'	827.25	827.01	10.00'
87+25	826.61	9.75'	826.94	826.67	9.75'
87+50	826.19	9.50'	826.56	826.26	9.50'
87+75	825.71	9.25'	826.12	825.79	9.25'
88+00	825.22	9.00'	825.66	825.30	9.00'

See Extra Area Sheet No. 17 For Elevations - Sta. 79+00 To Sta. 83+00

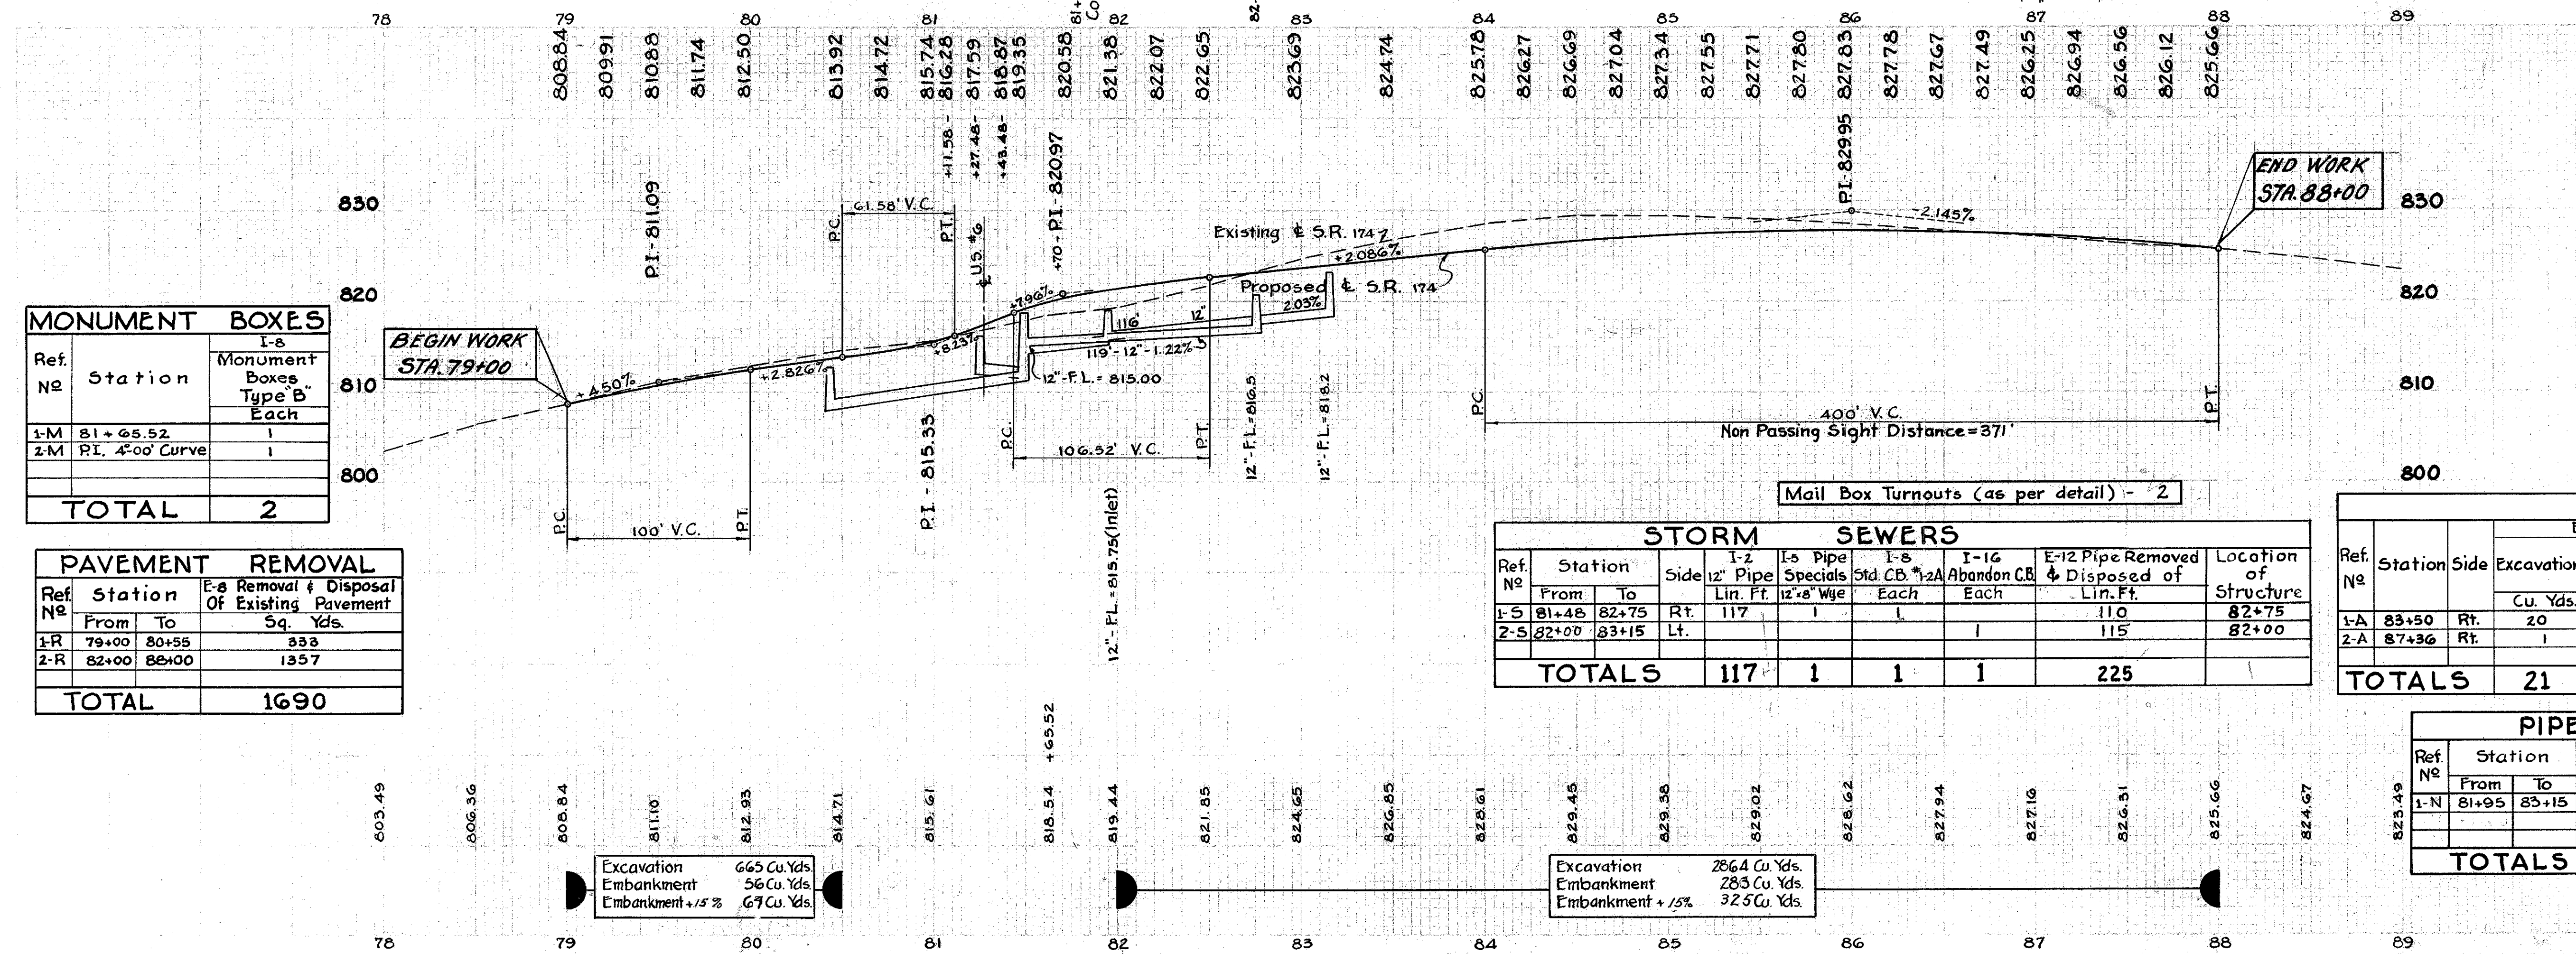

Ref. No.	Station	Monument Boxes, Type 'B' Each
1-M	81+65.52	1
2-M	PI, 4°00' Curve	1
<b>TOTAL</b>		<b>2</b>

Ref. No.	Station	Removal & Disposal Of Existing Pavement Sq. Yds.
1-R	79+00 to 80+55	333
2-R	82+00 to 86+00	1357
<b>TOTAL</b>		<b>1690</b>

Ref. No.	Station	Side	I-2 12" Pipe Lin. Ft.	I-5 Pipe Specials 12"x8" Wye	I-8 Std. C.B. #2A Each	I-16 Abandon C.B. Each	E-12 Pipe Removed & Disposed of Lin. Ft.	Location of Structure
1-5	81+48 to 82+75	Rt.	117	1	1		110	82+75
2-5	82+00 to 83+15	Lt.					115	82+00
<b>TOTALS</b>			<b>117</b>	<b>1</b>	<b>1</b>	<b>1</b>	<b>225</b>	

Ref. No.	Station	Side	E-1 Excavation Cu. Yds.	E-12 Excavation Deduction Cu. Yds.	E-12 Pipe Removed & Disposed of Lin. Ft.	I-17 Aggregate Cu. Yds.	I-1 12" Pipe for Driveways Lin. Ft.	Apron Type #1 or #2
1-A	83+50	Rt.	20	36	40	20	32	#2
2-A	87+36	Rt.	1			1		None
<b>TOTALS</b>			<b>21</b>	<b>36</b>	<b>40</b>	<b>21</b>	<b>32</b>	

Ref. No.	Station	Side	I-4 12" Pipe Lin. Ft.	I-6 Std. C.B. #2A Each	Location of Structure
1-N	81+95 to 83+15	Lt.	116	1	83+15
<b>TOTALS</b>			<b>116</b>	<b>1</b>	

Excavation	665 Cu. Yds.
Embankment	56 Cu. Yds.
Embankment +15%	67 Cu. Yds.

Excavation	286.4 Cu. Yds.
Embankment	283 Cu. Yds.
Embankment +15%	325 Cu. Yds.