

END WORK  
STA. 99+90.00

BEGIN SHEET STA. 99+50

618.40

617.26

616.71

616.20

STA. 100+52 HOPKINS RD. + STA.  
26+14 HENDRICKS RD. EXT.

616.17

616.48

616.80

617.45

618.10

618.75

619.40

620.10

620.80

621.00

621.20

625

620

615


625

620

615

EXCAVATION 117.8 C.Y.  
EMBANKMENT 0.4 C.Y.  
SEEDING & MULCHING 237 S.Y.

☉ CURVE DATA  
STA. 101+59.17 TO STA. 105+65.04  
R = 842.80'  
Δ = 27°35'32"  
L = 405.87'  
T = 206.95'  
C = 401.96'

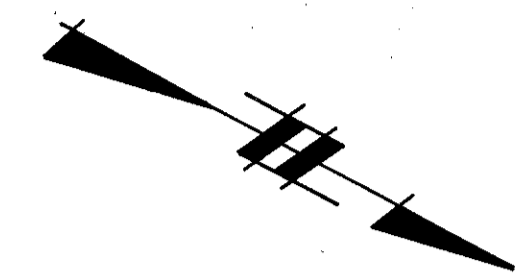

BENCHMARK: TOP OF HYDRANT  
NW CORNER HENDRICKS & HOPKINS  
ROAD  
ELEV. 618.96

FOR TYPICAL SECTION SEE SHEET 11  
FOR CROSS SECTIONS SEE SHEET 105 THRU 107  
FOR SIGNING PLAN SEE SHEET 152  
FOR PAVEMENT MARKING DETAILS SEE SHEET 154  
FOR DRIVEWAY PROFILES SEE SHEET 138  
FOR DRIVEWAY DETAILS SEE SHEET 19  
FOR CURB DETAILS SEE SHEET 144  
FOR RIGHT-OF-WAY PLANS SEE SHEET 162

ROADWAY		609							
REF.	LOCATION	L.F.							
R-1	STA. 99+71 TO 99+91, LT.	23							
R-2	STA. 100+52 TO 100+71, LT.	23							
TOTALS		46							