


FOR TYPICAL SECTION SEE SHEET 111
 FOR CROSS SECTIONS SEE SHEET 115 THRU 117
 FOR SIGNING PLAN SEE SHEET 152
 FOR PAVEMENT MARKING DETAILS SEE SHEET 154
 FOR DRIVEWAY PROFILES SEE SHEET 142
 FOR DRIVEWAY DETAILS SEE SHEET 149
 FOR CURB DETAILS SEE SHEET 144
 FOR DRAINAGE DETAILS SEE SHEET 144
 FOR PAVEMENT REPLACEMENT DETAILS SEE SHEET 144
 FOR GUARDRAIL DETAIL SEE SHEET 144
 FOR RIGHT-OF-WAY PLANS SEE SHEET 163

* NOTE: TAPER CURB HEIGHT FROM 6" TO 0" IN 10'-0"

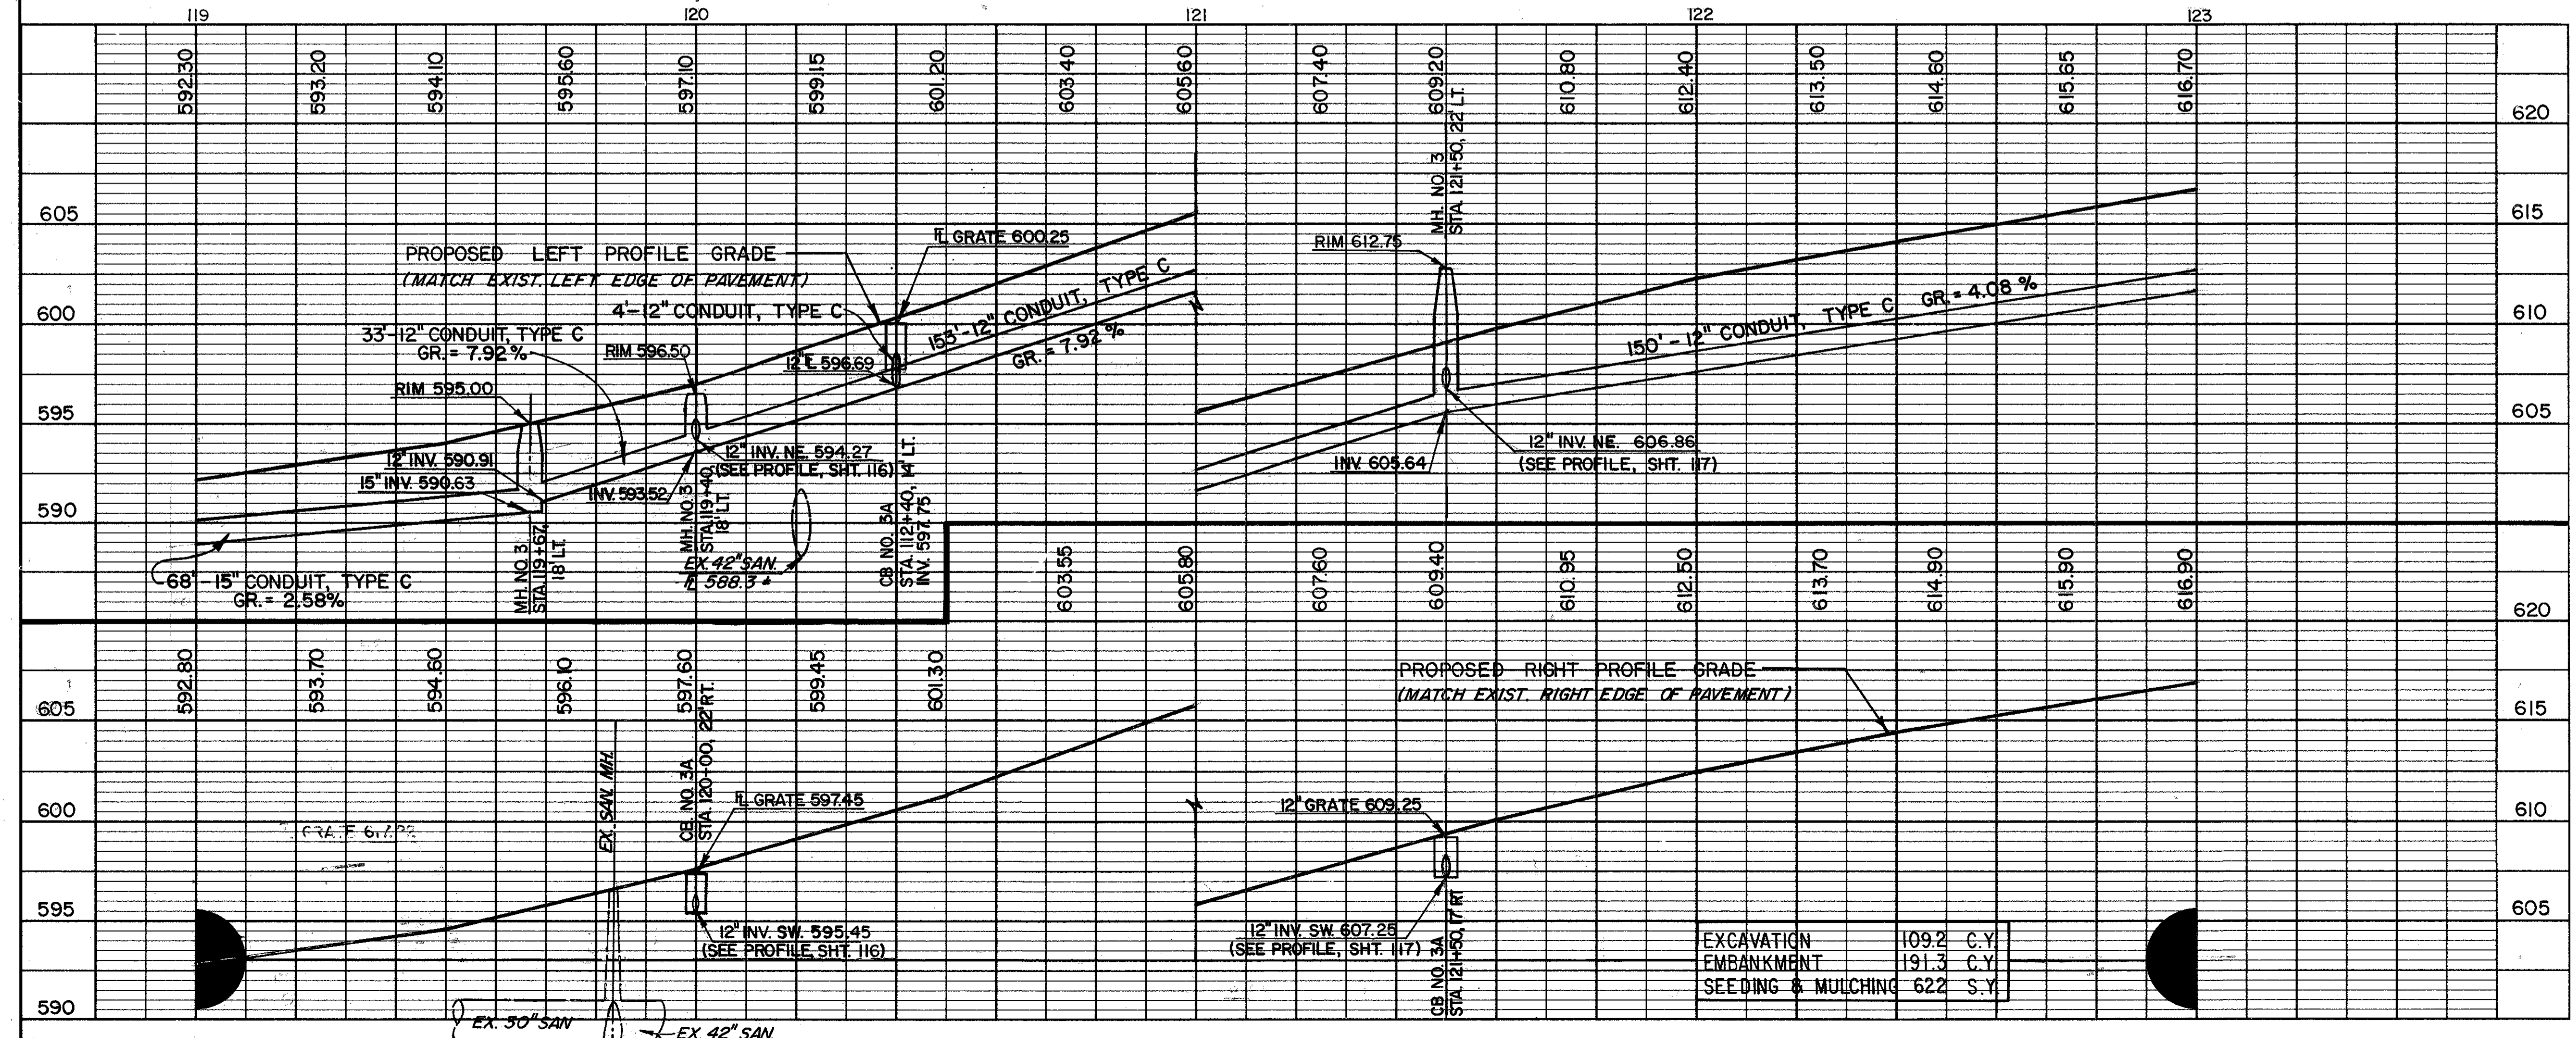

EXCAVATION	109.2	C.Y.
EMBANKMENT	191.3	C.Y.
SEEDING & MULCHING	622	S.Y.

ROADWAY		202	202	606	606
REF.	LOCATION	S.Y.	L.F.	L.F.	EA.
R-1	STA. 122+95, LT.	25			
R-2	STA. 122+95, 23' LT.		20		
R-3	STA. 119+00 TO 119+85, LT.			60	1
R-4	STA. 119+00 TO 119+80, RT.			55	1
TOTALS		25	20	115	2

DRAINAGE		603	603	603	604	604
REF.	LOCATION	L.F.	L.F.	L.F.	EA.	EA.
D-1	STA. 119+00, 26' LT. TO 119+67, 18' LT.					
D-2	STA. 120+00, 18' LT. TO 121+50, 22' LT.		153			
D-3	STA. 121+50, 22' LT. TO 123+00, 27' LT.		150			
D-4	STA. 120+00, 22' RT. TO 18' LT.	40				
D-5	STA. 120+40, 14' LT. TO 18' LT.		4			
D-6	STA. 121+50, 17' RT. TO 22' LT.	39				
D-8	STA. 119+67, 18' LT.					1
D-9	STA. 120+00, 22' RT.					1
D-10	STA. 120+40, 14' LT.					1
D-11	STA. 121+50, 22' LT.					1
D-12	STA. 121+50, 17' RT.					1
D-13	STA. 120+00, 18' LT.					1
D-14	STA. 119+67, 18' LT. TO 120+00, 18' LT.		33			
TOTALS		79	340	68	3	3