



LAKE COUNTY
SEC. LAK-640-2.56

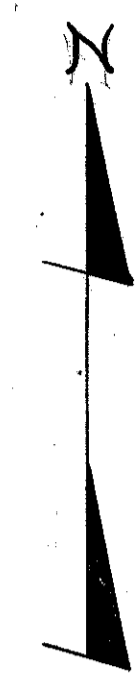

CODE TYPE 7221

NOTE: A Marker will be furnished and set on the right side before acceptance of this project.

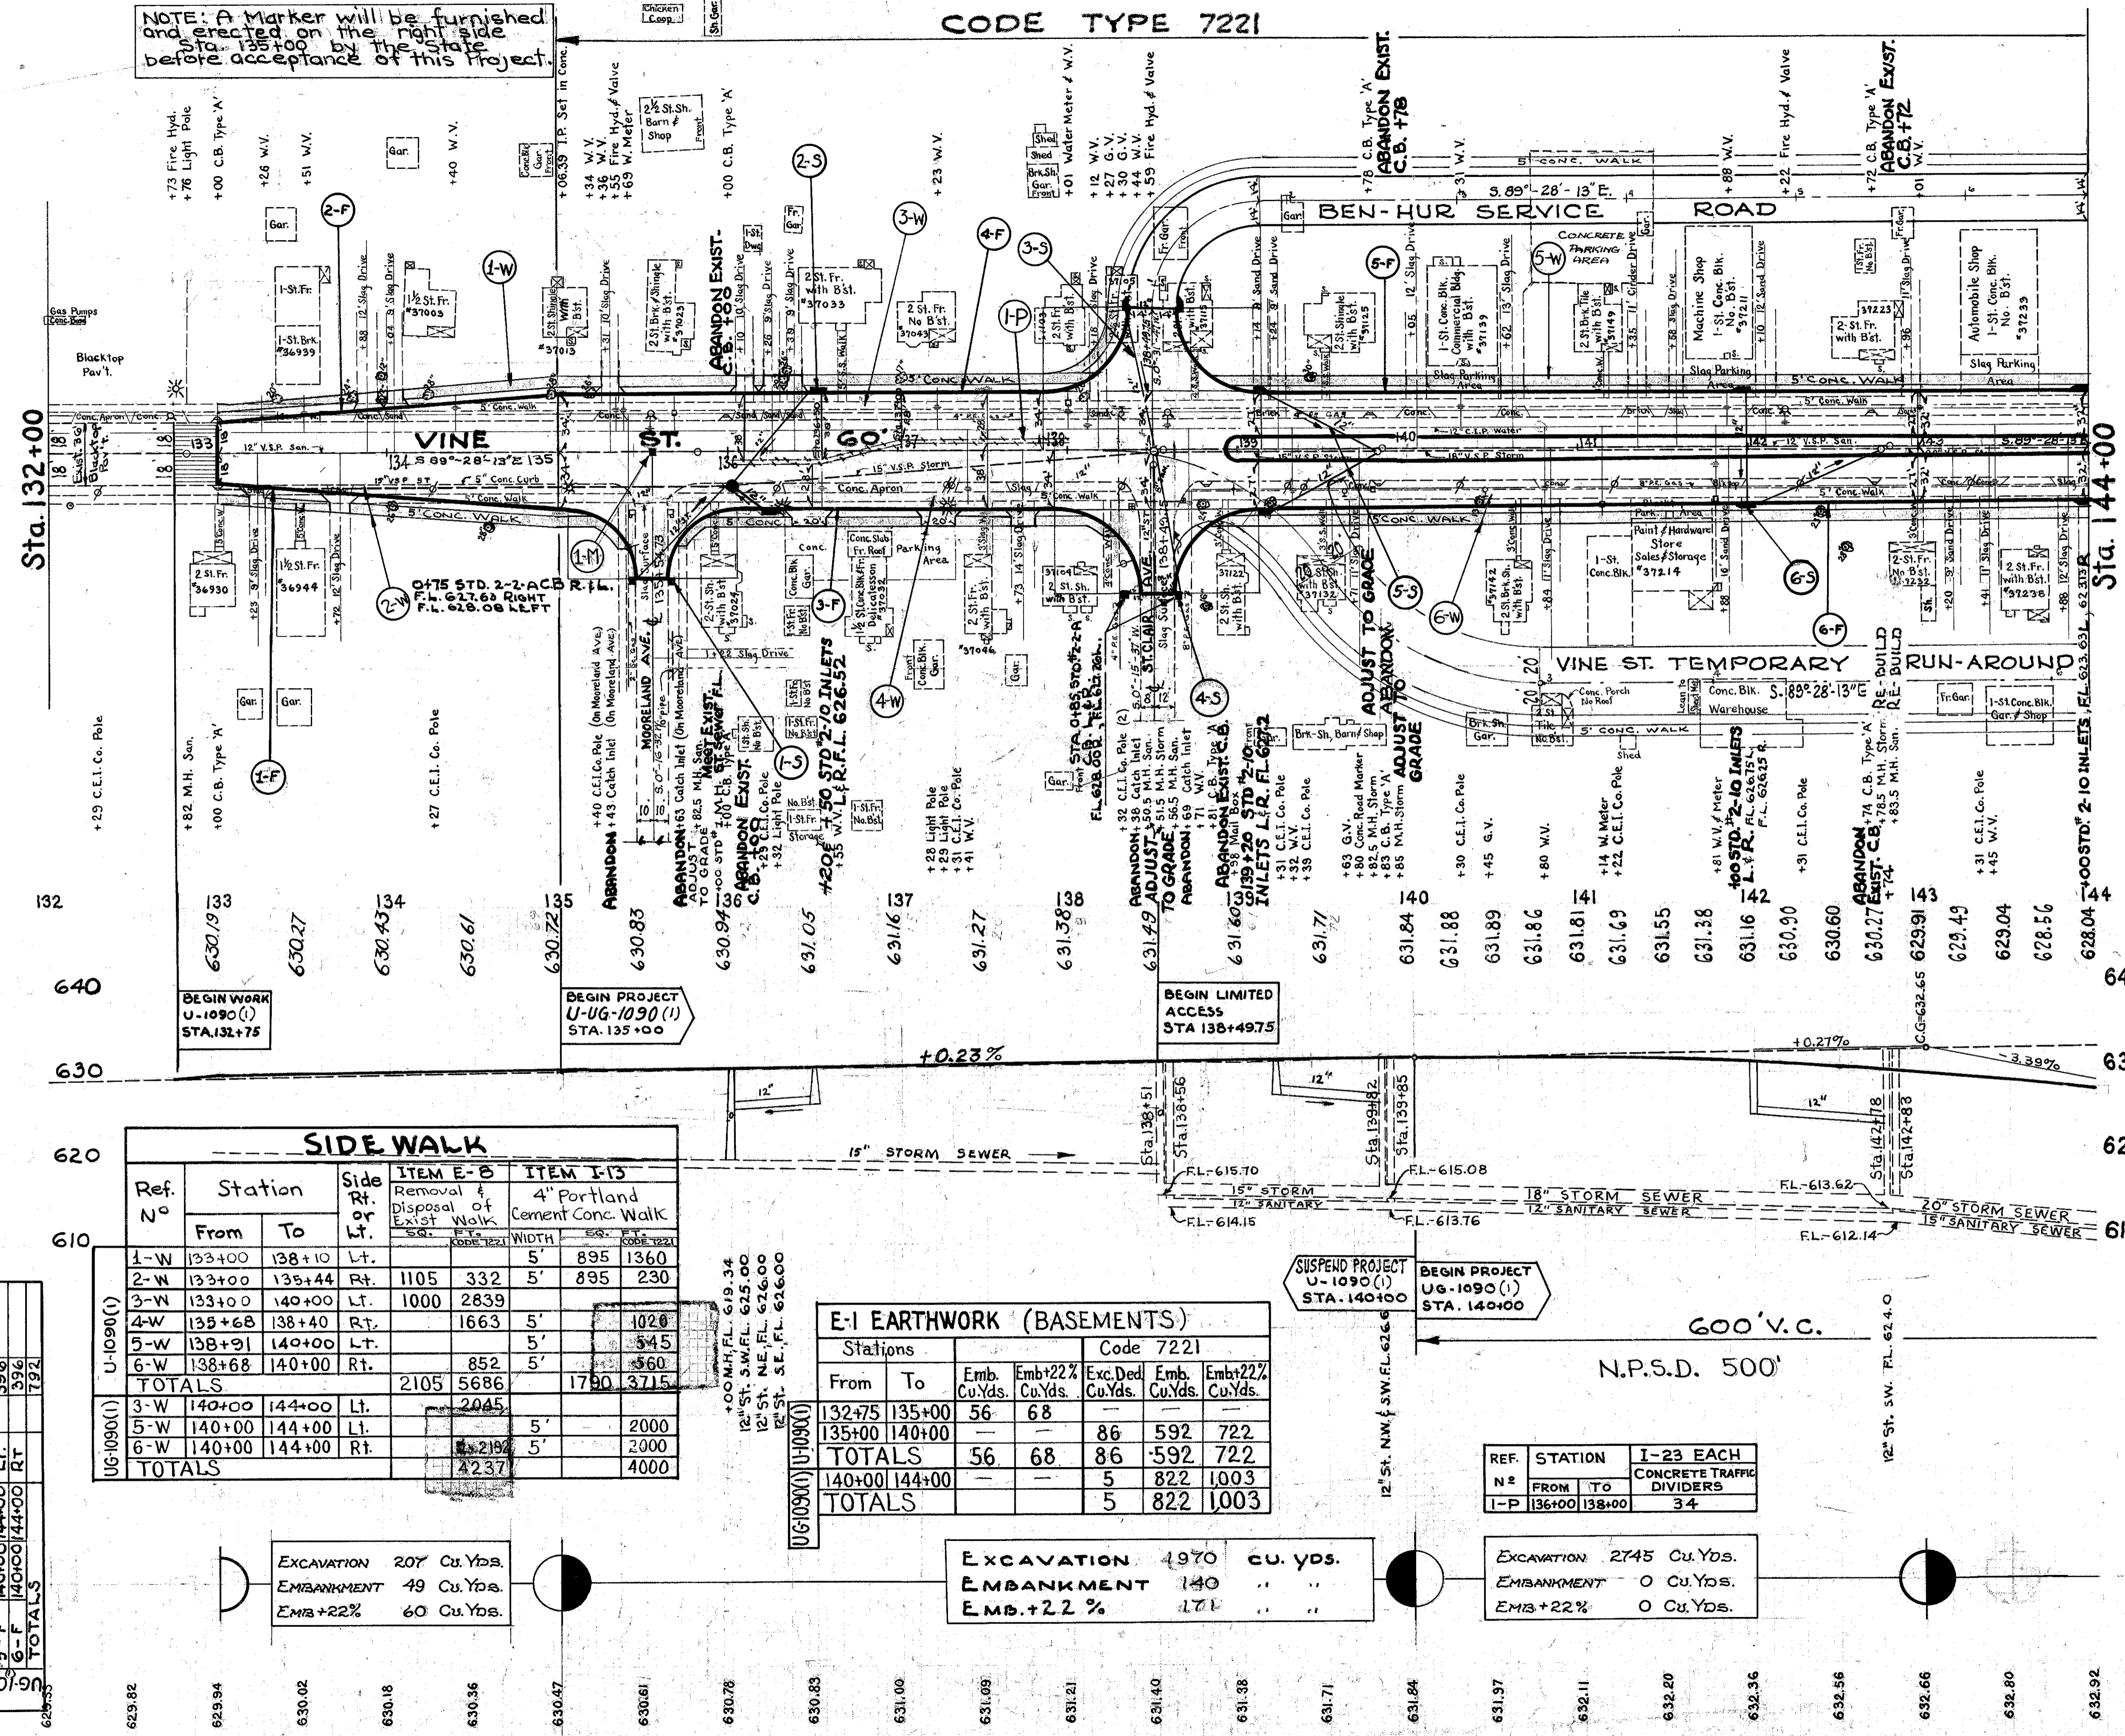

MONUMENTS

REF. No.	LOCATION	STATION	TYPE	I-8 Monument
1-M	335+47.3	Q		1
TOTAL	U-1090(1)			1

DRIVE WAY QUANTITIES

STATION	E-8 Removal of Existing Pavement	E-1 PORT Cement Concrete Driveways	E-1 Excavation Curb	I-7 Deduction
U-1090(1)	19	54	11	148
U-1090(1)	19	54	11	148
U-1090(1)	351	195	44	148
U-1090(1)	351	195	44	148
TOTALS	77	77		

6" UNDERDRAINS

REF. No.	STATION	SIDE RT. OR LT.	FROM	TO	UNDERDRAIN	UNITS
1-F	133+00	RT.	133+00	135+00	200	396
2-F	135+00	RT.	135+00	137+00	200	396
3-F	137+00	RT.	137+00	139+00	200	396
4-F	139+00	RT.	139+00	141+00	200	396
5-F	141+00	RT.	141+00	143+00	200	396
6-F	143+00	RT.	143+00	144+00	200	396
TOTALS					1200	792

SIDE WALK

Ref. No.	Station	Side Rt.	ITEM E-8		ITEM I-13	
			Removal & Disposal of Existing Walk	4" Portland Cement Conc. Walk	Removal & Disposal of Existing Walk	4" Portland Cement Conc. Walk
1-W	133+00	LT.	1105	332	5'	895
2-W	133+00	RT.	1105	332	5'	895
3-W	133+00	LT.	1000	2839	5'	230
4-W	135+68	RT.	1663		5'	1020
5-W	138+91	LT.			5'	545
6-W	138+68	RT.		852	5'	560
TOTALS			2105	5686	1750	3715

E-1 EARTHWORK (BASEMENTS)

Stations		Code 7221			
From	To	Emb. Cu.Yds.	Emb+22% Cu.Yds.	Exc.Ded. Cu.Yds.	Emb+22% Cu.Yds.
132+75	135+00	56	68		
135+00	140+00			86	592
TOTALS		56	68	86	722
140+00	144+00			5	822
TOTALS				5	1003

EXCAVATION 207 Cu.Yds.
EMBANKMENT 49 Cu.Yds.
EMB+22% 60 Cu.Yds.

EXCAVATION 1970 Cu.Yds.
EMBANKMENT 140 Cu.Yds.
EMB+22% 171 Cu.Yds.

EXCAVATION 2745 Cu.Yds.
EMBANKMENT 0 Cu.Yds.
EMB+22% 0 Cu.Yds.

STORM SEWERS

REF. No.	STATION	SIDE RT. OR LT.	FROM	TO	CLASS	INLET	MANHOLE	CATCH BASIN	STO. 2-2A	STO. 2-10	STO. 2-10	MANHOLE	INLET	MANHOLE	STO. 2-10	MANHOLE	STO. 2-10	MANHOLE
2-S	136+00	RT.	136+00	136+00	12"	2												
3-S	136+00	RT.	136+00	136+00	12"	2												
4-S	136+00	RT.	136+00	136+00	12"	2												
5-S	136+00	RT.	136+00	136+00	12"	2												
6-S	136+00	RT.	136+00	136+00	12"	2												
TOTALS						10												

PLAN & PROFILE ~ VINE ST. ~ STA. 132+00 TO STA. 144+00