LAK. 84 (3.27-7.81)
LAKE COUNTY

FED. RD. DIVISION	STATE	PROJECT	TOTAL SHEETS
2	OHIO		

18 / 83

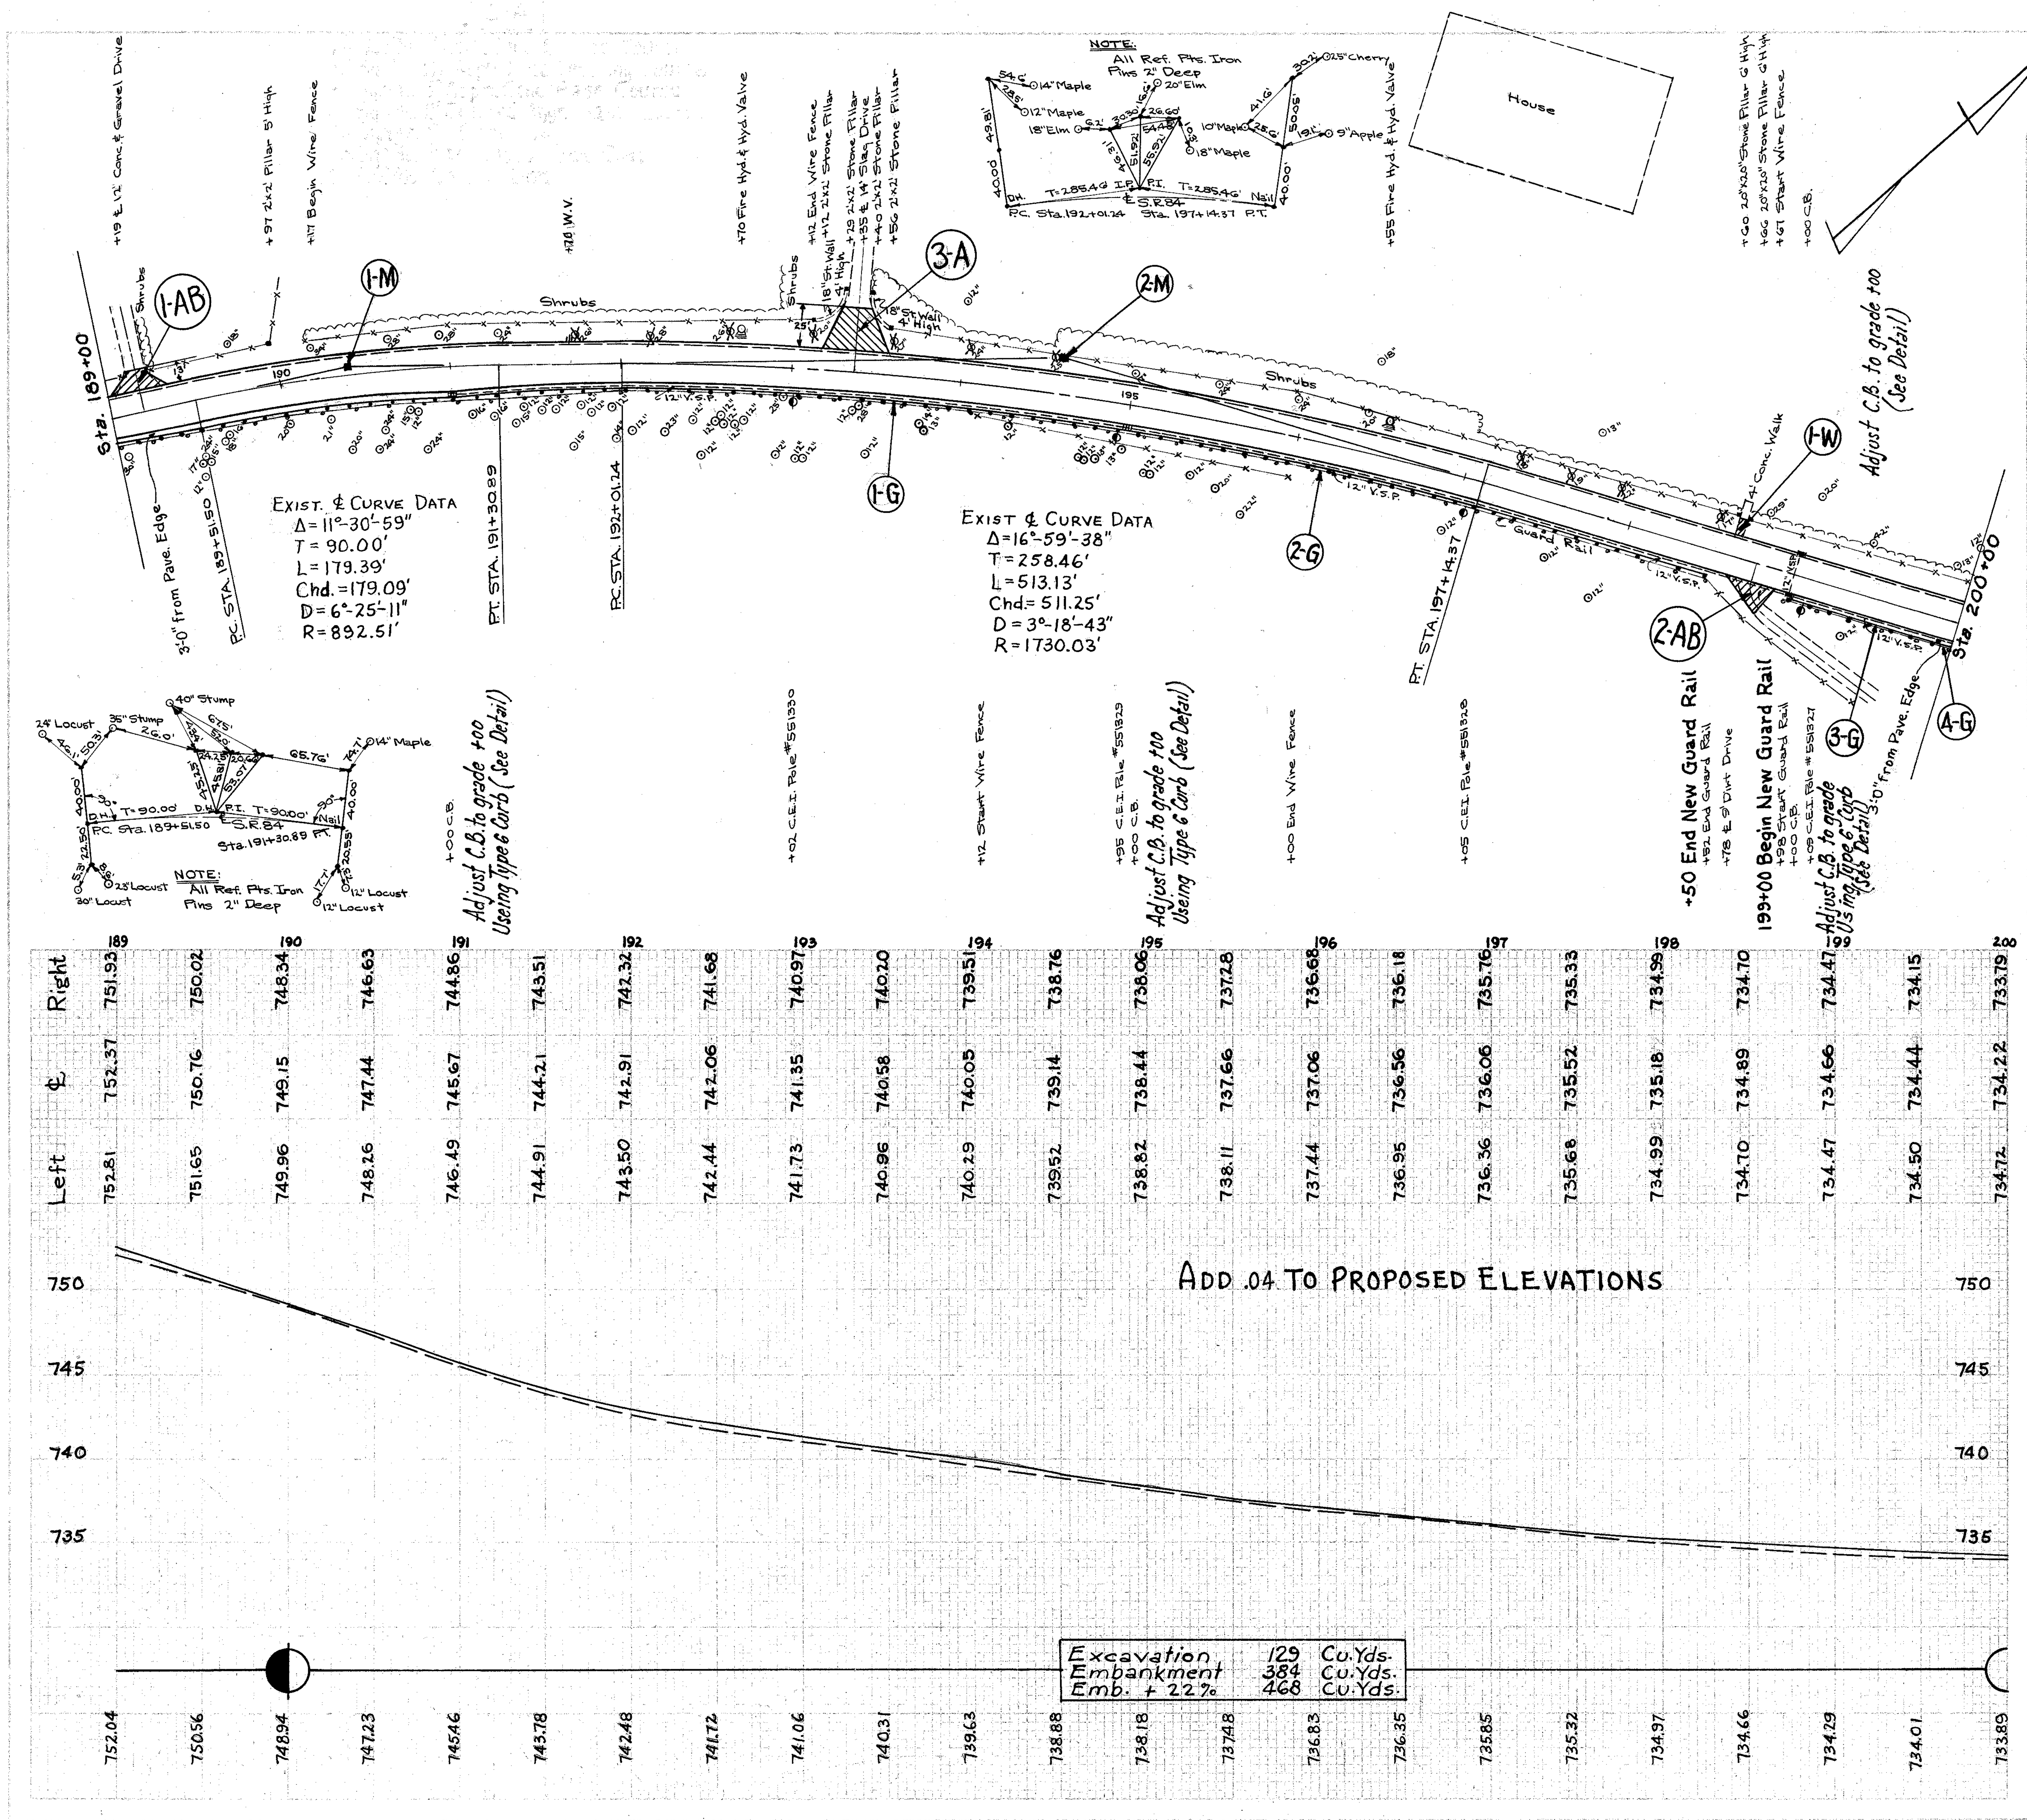

ESTIMATED QUANTITIES

Ref. No.	Station to Station	Side	5" Crushed Aggreg. Base Course Sq.Yds.	2" Asph. Conc. Surface Course Sq.Yds.	7" Plain Conc. Pavem't 7-70 Sq.Yds.	Excavation Cu.Yds.	Remove & Disp. of Exist. Guardrail Lin.Ft.	Guardrail Steel Beam (Deep) Lin.Ft.	Mon. Box Assembly in place Each	Adjust to Grade Water Valves Each	Adjust to Grade Hydrants Each	Adjust to Grade Hyd. Valves Each	Adjust C.B. to grade (See Detail) Each	Adjust C.B. to grade Type 6 Curb (See Detail) Each	Remove & Disp. of Exist. Sidewalk Sq.Ft.	4" Conc. Sidewalk Sq.Ft.	See Sheet No.
	DRIVES																
1-AB	189+19	L			28	6											
2-AB	198+78	R	27	27		5											
3-A	193+35	L	78	78		19											
	GUARDRAIL																
1-G	189+00 to 198+50	R						950									
2-G	189+00 to 198+52	R					952										
3-G	199+00 to 200+00	R						100									
4-G	198+98 to 200+00	R					102										
	MONUMENT BOXES 1-M to 2-M								2								
	CATCH BASINS												3	1			
	WATER VALVES									1							
	HYDRANTS & HYD. VALVES										2	2					
	SIDEWALK																
1-W	198+63	L													48	40	
	TOTALS		105	105	28	30	1054	1050	2	1	2	2	3	1	48	40	

PLAN & PROFILE STA. 189+00 TO STA. 200+00