


SHALE EXCAV.		OVER BURDEN EXCAV.		GRAN. BACKFILL		EMBANKMENT	
END AREA	CU. YDS.	END AREA	CU. YDS.	END AREA	CU. YDS.	END AREA	CU. YDS.
258	1576	89	1878				
232	1348	78	1589				
243	1336	77	1552				
218	1125	69	1318				
227	1127	71	1294				

EXCAVATION OVERBURDEN	= 15866	CU. YDS.
EXCAVATION SHALE	= 2318	CU. YDS.
EMBANKMENT GRAN. MATERIAL	= 17,819	CU. YDS.
EMBANKMENT	= 21,739	CU. YDS.
EMBANKMENT + 22%		

SEEDING & SODDING	
LENGTH	AREA
Lin. Ft.	Sq. Yds.
100	
268	
92	
245	
85	

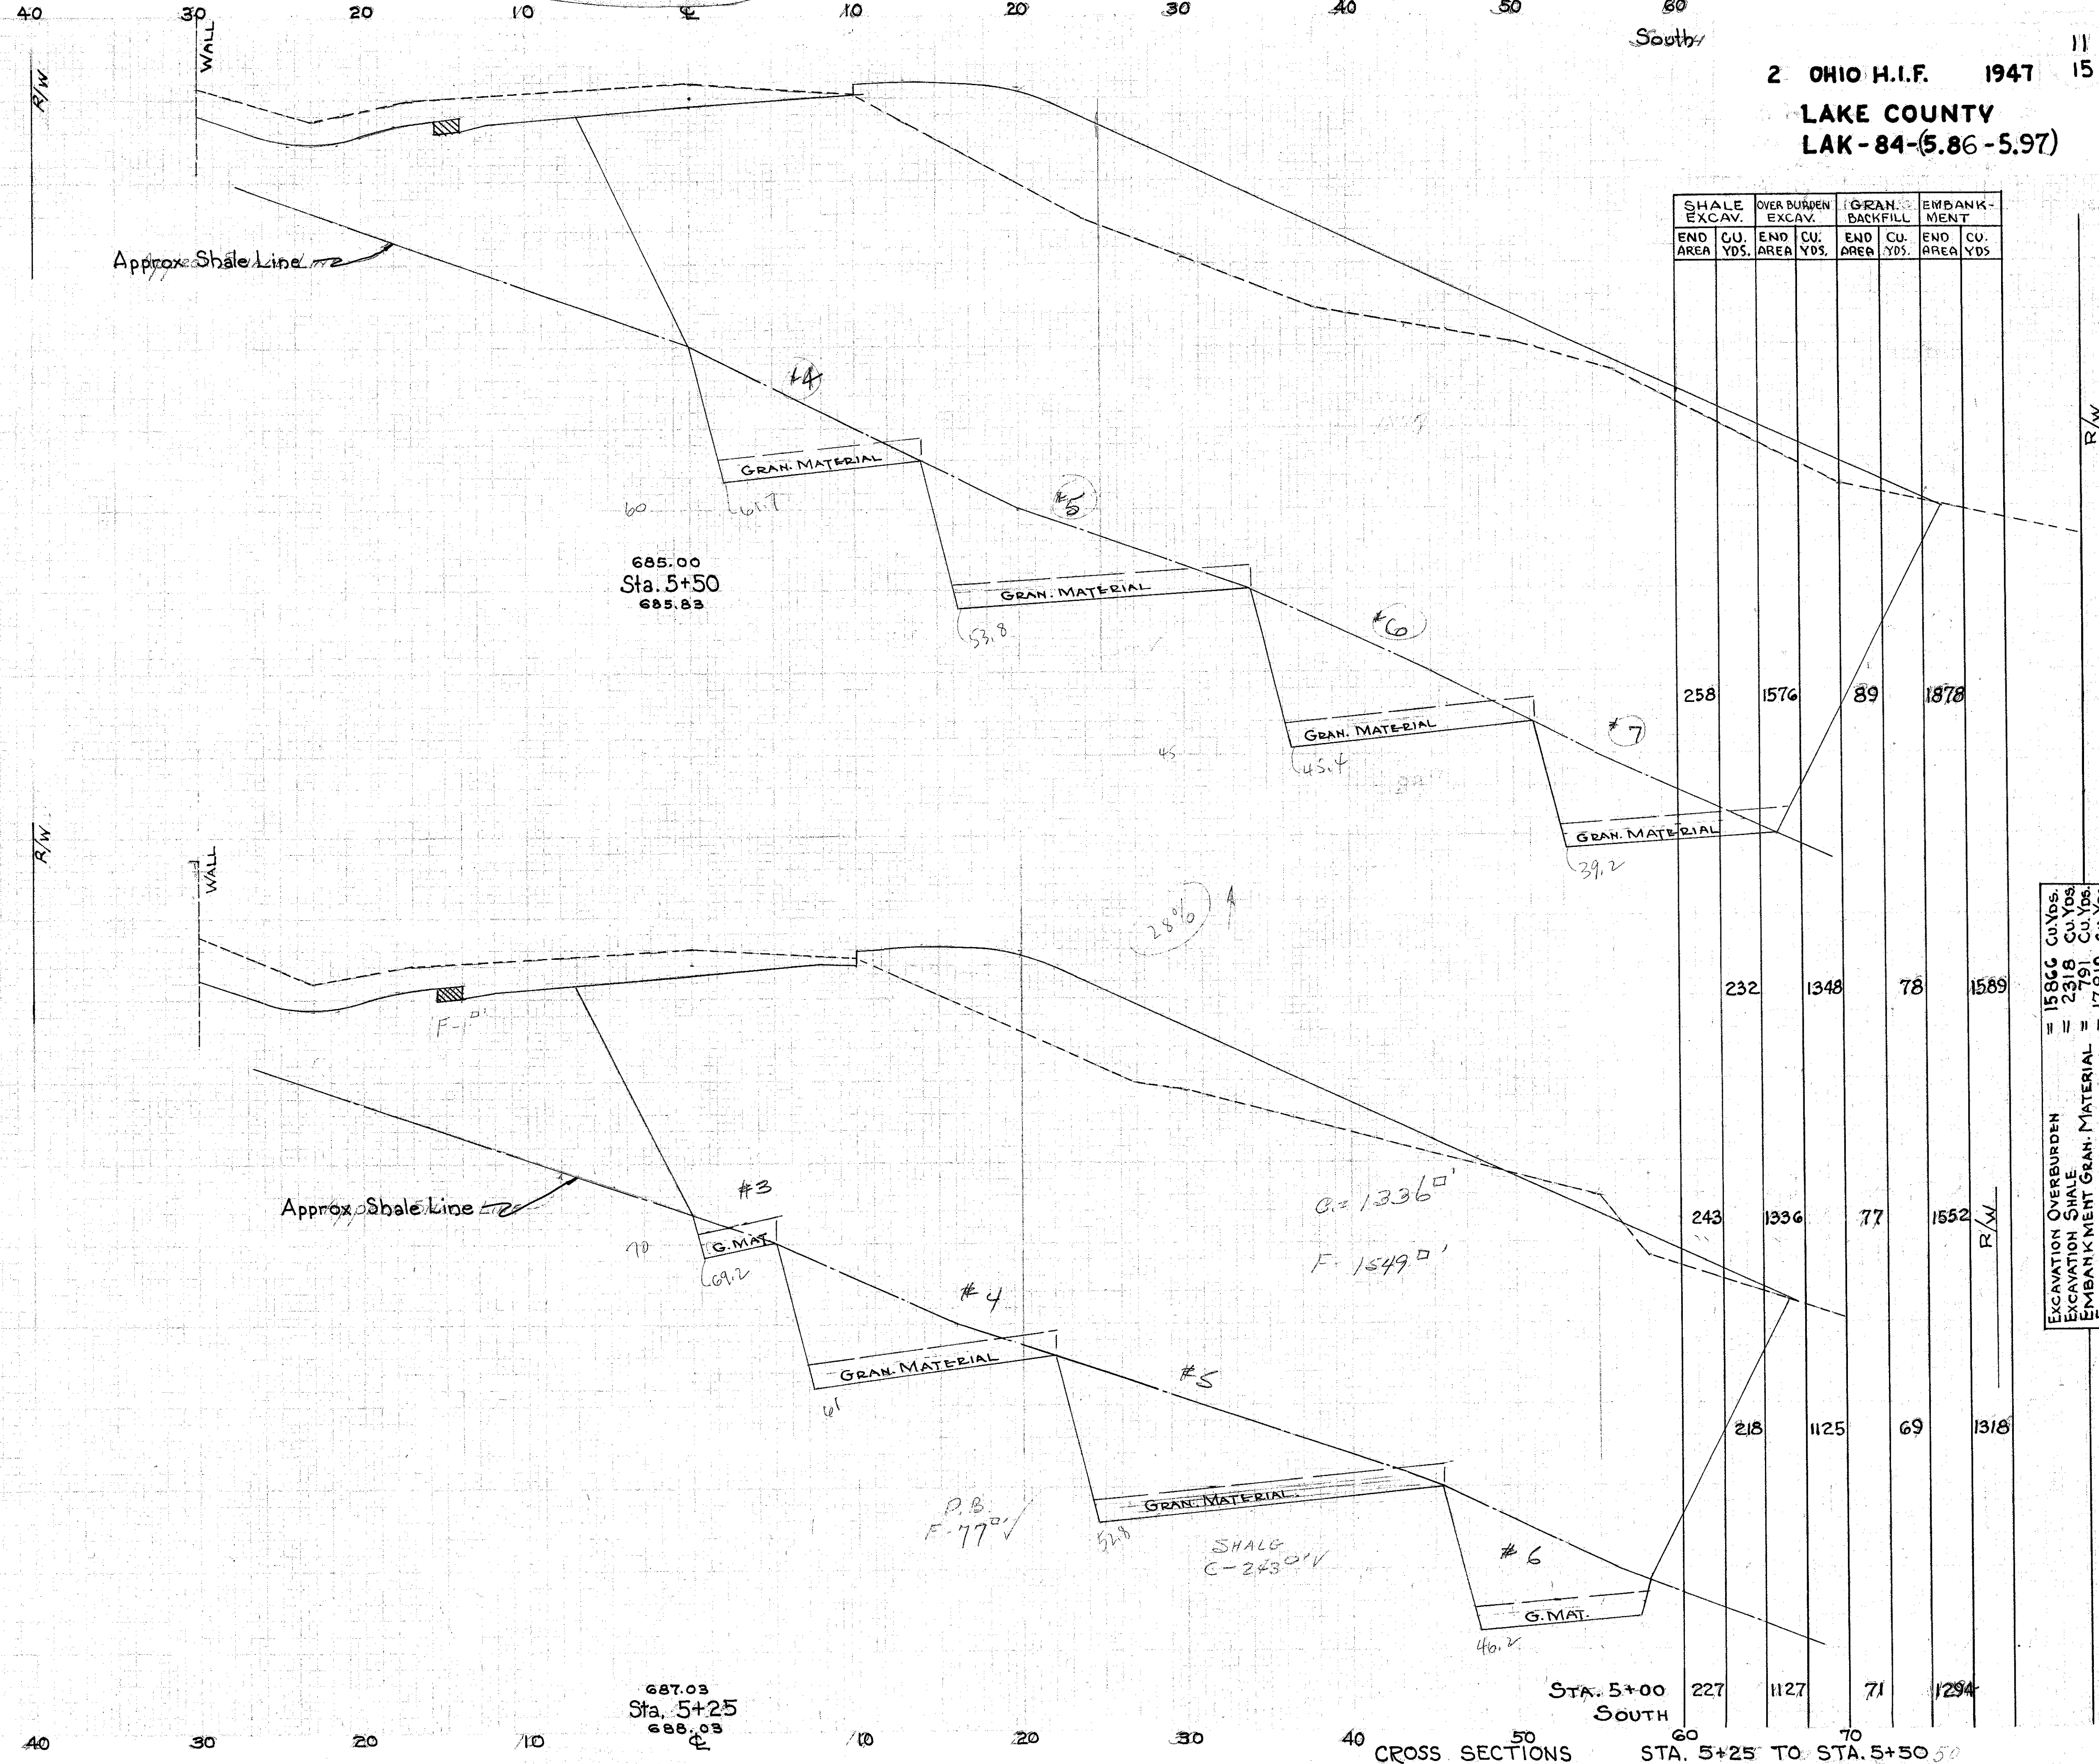

CROSS SECTIONS STA. 5+25 TO STA. 5+50