
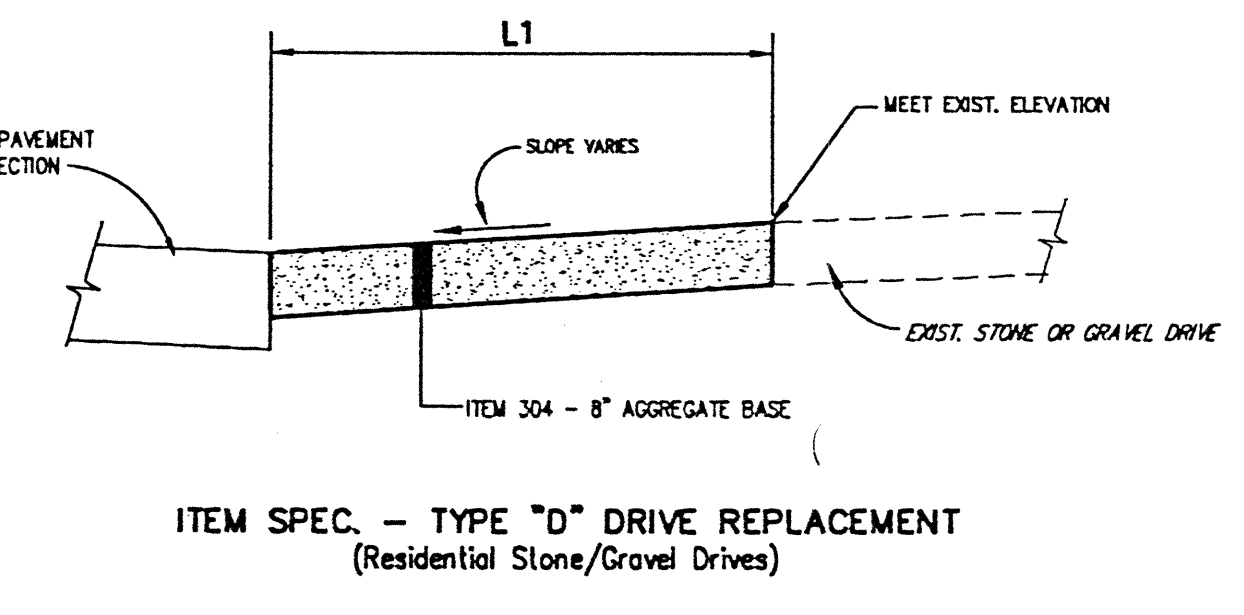
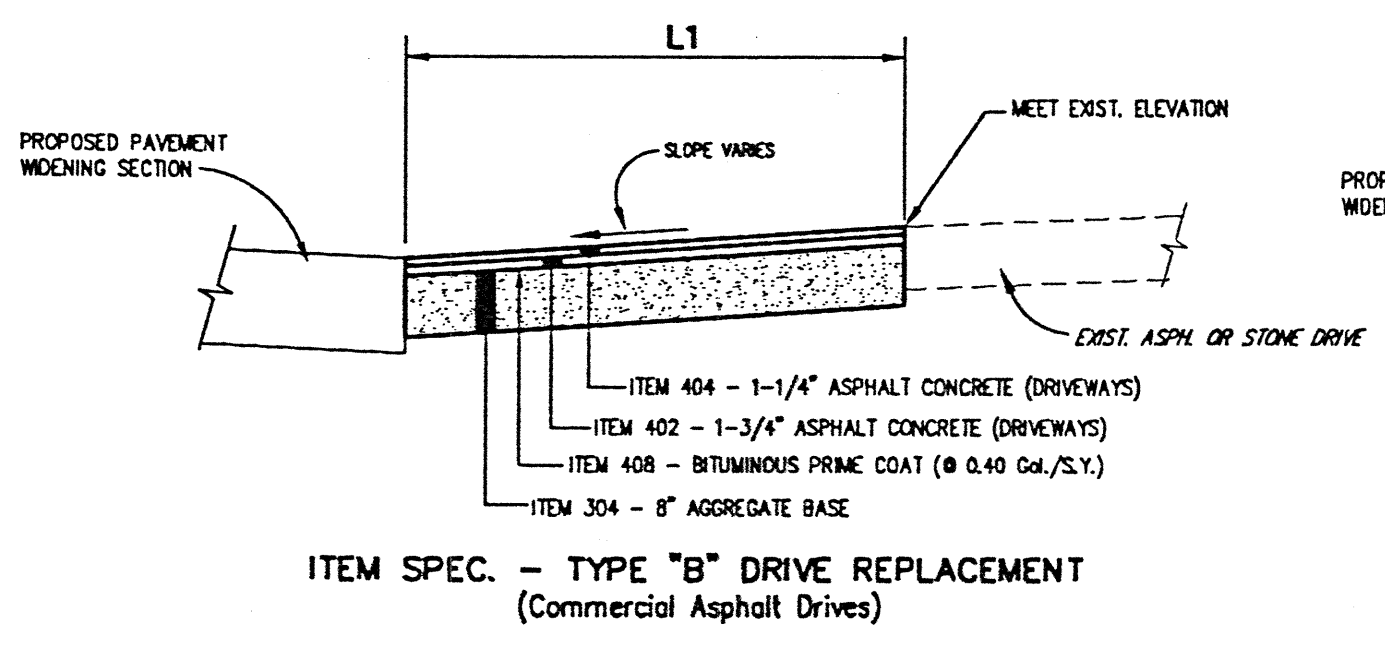
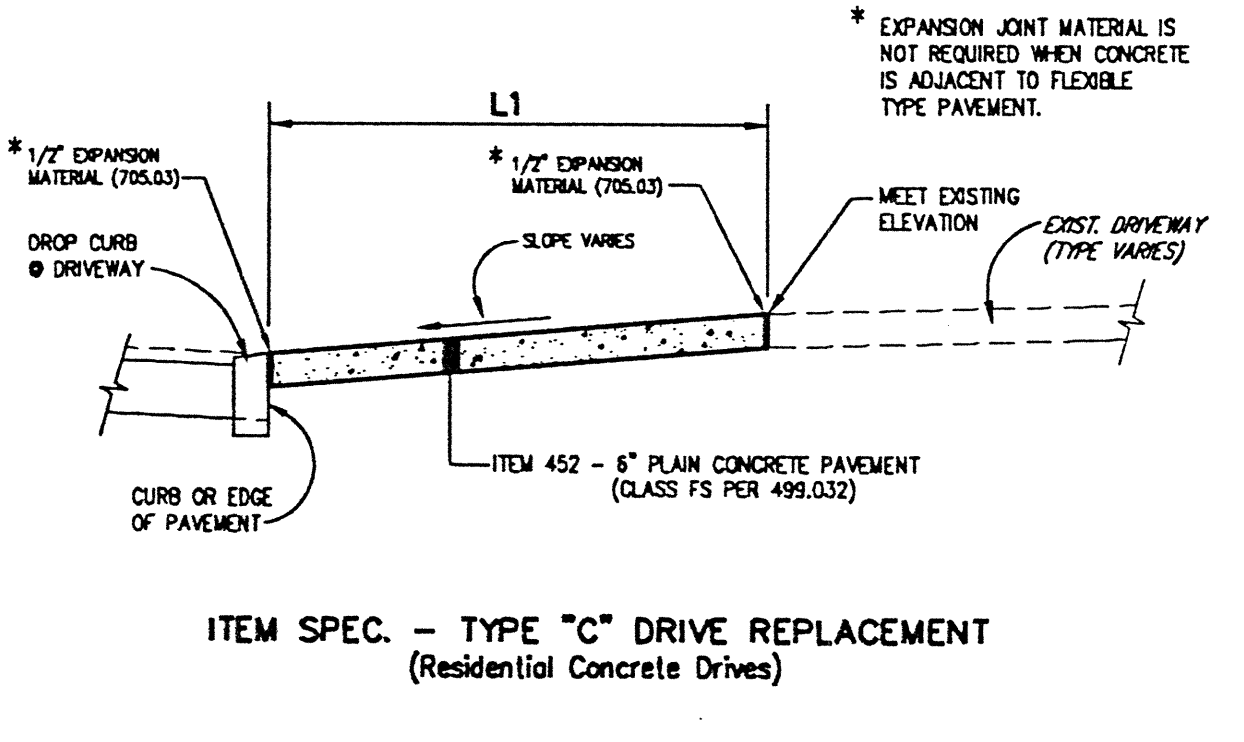
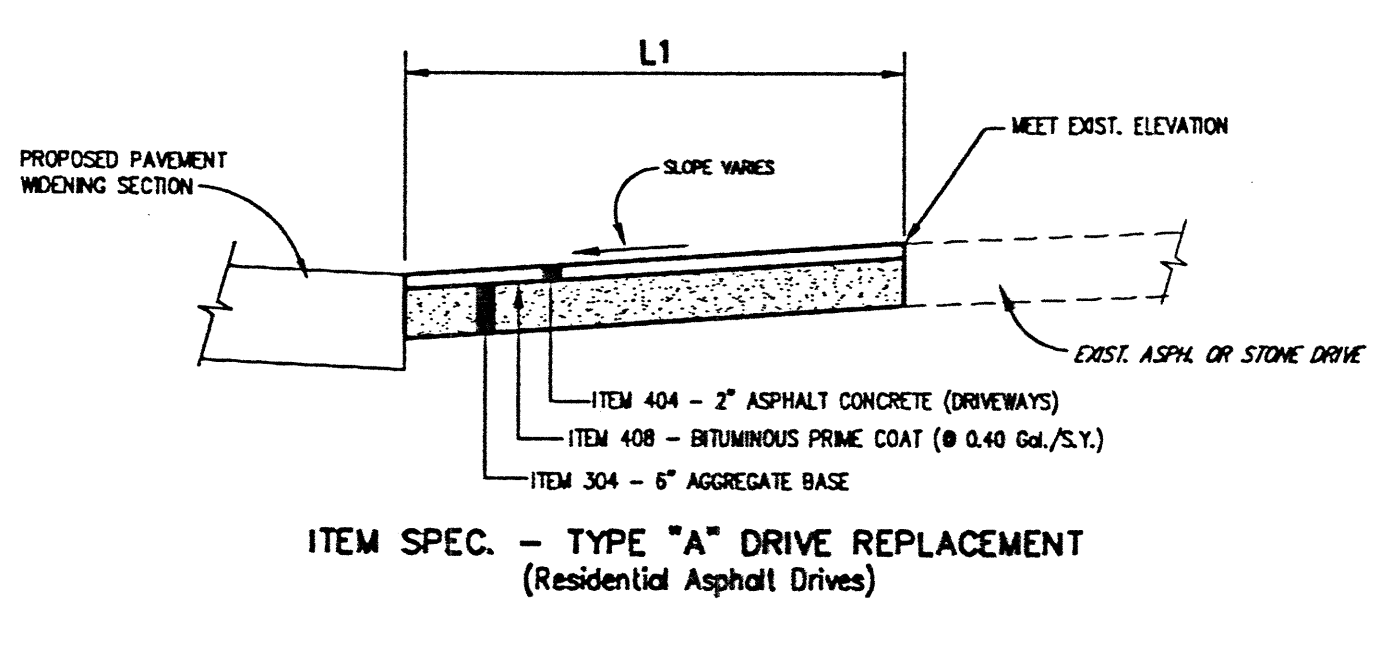
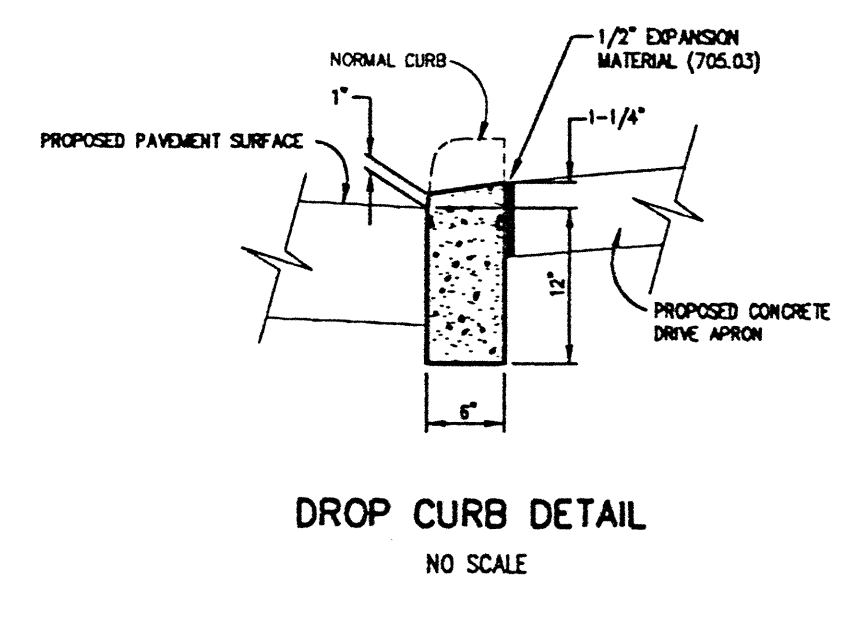
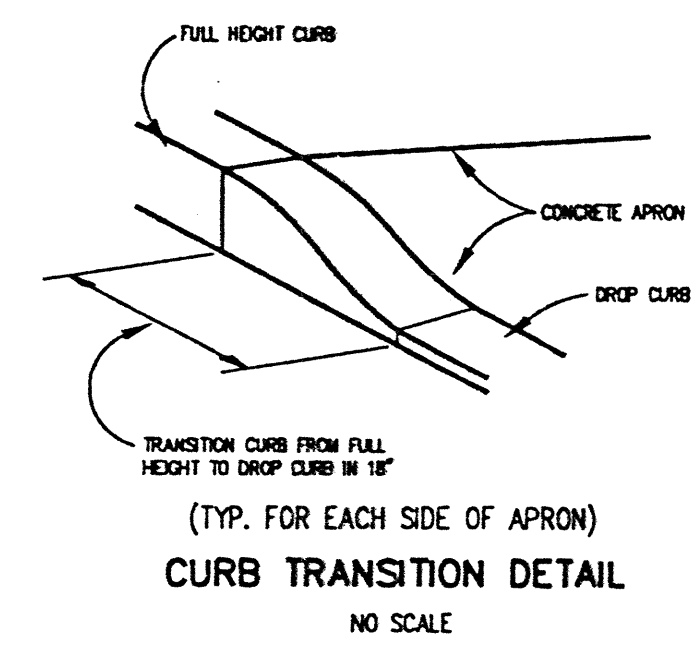
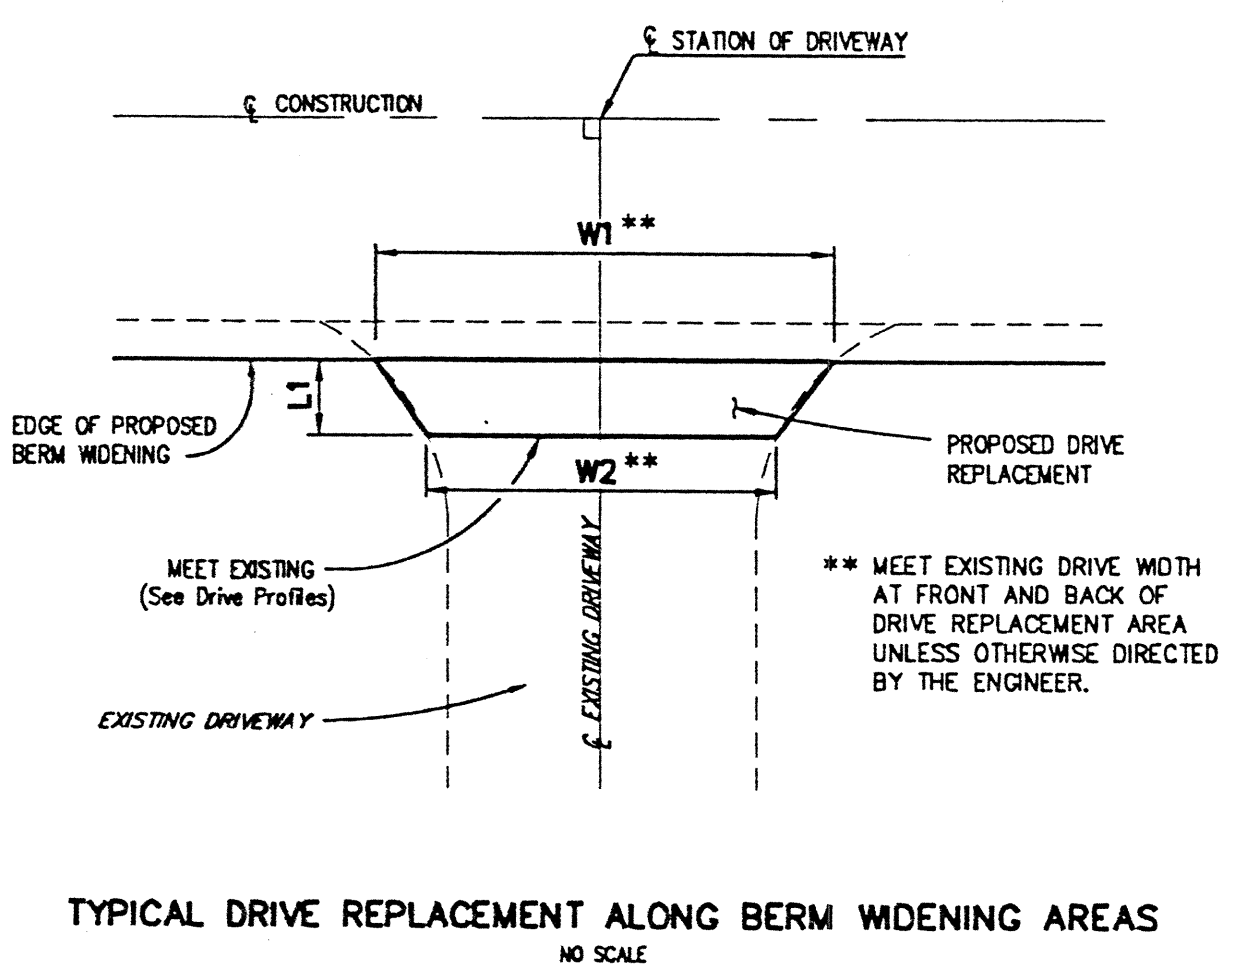


DRIVEWAY REPLACEMENT SCHEDULE

PLAN SHEET NO.	LOCATION (STA., LT. OR RT.)	STREET ADDRESS	DRIVE REPLACEMENT				EXTRA AREA			PAVEMENT REMOVED (SQ. YD.)	EXCAVATION (6" DEPTH) (CU. YD.)	EXCAVATION (6" DEPTH) (CU. YD.)	EXCAVATION (11" DEPTH) (CU. YD.)	ITEM SPEC. TYPE "A" DRIVE REPLACEMENT (SQ. YD.)	ITEM SPEC. TYPE "B" DRIVE REPLACEMENT (SQ. YD.)	ITEM SPEC. TYPE "C" DRIVE REPLACEMENT (SQ. YD.)	ITEM SPEC. TYPE "D" DRIVE REPLACEMENT (SQ. YD.)	
			EXIST. DRIVE TYPE	W1 LIN. FT.	W2 LIN. FT.	L1 LIN. FT.	REPL. AREA SQ. FT.	L2 LIN. FT.	EXTRA AREA SQ. FT.									DRIVE REPL. TYPE
14	STA. 41+89.3, LT.	7407 JOHNNYCAKE RIDGE	ASPH.	40.0	30.0	5	175											
15	STA. 43+45.5, LT.	7419 JOHNNYCAKE RIDGE	STONE	30.0	20.0	5	125									3.1		
**	STA. 44+00, LT.		STONE	30.0	24.0	5	135											
	STA. 47+50.5, RT.	7458 JOHNNYCAKE RIDGE	ASPH.	22.5	12.9	10	177								19.7			
16	STA. 48+55.0, RT.	7468 JOHNNYCAKE RIDGE	STONE	24.0	14.0	8	152								16.9			
	STA. 49+65, RT.	7478 JOHNNYCAKE RIDGE	ASPH.	26.6	16.6	8	173								19.2			
	STA. 52+28.3, LT.	7485 JOHNNYCAKE RIDGE	ASPH.	25.8	15.8	7.8	162											
17	STA. 52+72.0, RT.	7516 JOHNNYCAKE RIDGE	ASPH.	23.7	10.3	8	136											
	STA. 53+00.0, LT.	7485 JOHNNYCAKE RIDGE	ASPH.	22.4	12.4	7.9	137											
	STA. 53+72.0, RT.	7520 JOHNNYCAKE RIDGE	CONC.	23.0	13.0	8	144								16.0			
	STA. 54+45.4, LT.	7495 JOHNNYCAKE RIDGE	STONE	22.8	12.8	7.9	141											
	STA. 54+70.8, RT.	7524 JOHNNYCAKE RIDGE	ASPH.	21.5	11.5	8	132											
	STA. 55+22.1, LT.	7505 JOHNNYCAKE RIDGE	ASPH.	31.3	21.3	8	210											
18	STA. 55+28.4, RT.	7524 JOHNNYCAKE RIDGE	ASPH.	22.8	12.8	8	142											
	STA. 55+53.9, LT.	7515 JOHNNYCAKE RIDGE	STONE	25.4	15.4	8	163											
	STA. 55+70.6, RT.	7530 JOHNNYCAKE RIDGE	ASPH.	21.7	11.7	8	134											
	STA. 56+12.6, LT.	7515 JOHNNYCAKE RIDGE	STONE	26.4	16.4	8.2	176											
19	STA. 56+61.1, RT.	7536 JOHNNYCAKE RIDGE	ASPH.	20.1	10.1	8	121	8	81									
	STA. 57+80.0, RT.	7548 JOHNNYCAKE RIDGE	ASPH.	22.2	12.2	8	138											
	STA. 58+98.5, RT.	7556 JOHNNYCAKE RIDGE	ASPH.	19.5	9.5	8	116											
	STA. 60+87.7, LT.	7549 JOHNNYCAKE RIDGE	ASPH.	25.7	15.7	7.9	164											
20	STA. 62+13.5, LT.	7557/7565 JOHNNYCAKE RIDGE	STONE	44.3	34.3	7.6	299											
	STA. 62+84.5, RT.	7578 JOHNNYCAKE RIDGE	STONE	20.0	10.0	8	120									13.3		
	STA. 64+06.8, LT.	7567 JOHNNYCAKE RIDGE	STONE	21.2	11.2	7.9	128											
21	STA. 64+45.8, RT.	7590 JOHNNYCAKE RIDGE	STONE	20.3	10.3	8	122									13.5		
	STA. 64+91.2, RT.	7598 JOHNNYCAKE RIDGE	ASPH.	20.1	10.1	8	121											
	STA. 67+21.6, LT.	7603 JOHNNYCAKE RIDGE	ASPH.	25.2	15.2	8	162											
	STA. 68+37.0, RT.	7622 JOHNNYCAKE RIDGE	ASPH.	18.7	8.7	8	110											
	STA. 68+43.7, LT.	7609 JOHNNYCAKE RIDGE	ASPH.	21.2	11.2	8.2	133											
	STA. 69+23.5, LT.	7617 JOHNNYCAKE RIDGE	ASPH.	20.9	10.9	8.3	132											
22	STA. 69+33.5, RT.	7628 JOHNNYCAKE RIDGE	STONE	20.5	10.5	8	124									13.7		
	STA. 70+05.0, LT.	7617 JOHNNYCAKE RIDGE	ASPH.	20.6	10.6	8.1	126											
	STA. 70+07.1, RT.	7628 JOHNNYCAKE RIDGE	STONE	20.2	10.4	8	123									13.6		
	STA. 70+26.2, RT.	7636 JOHNNYCAKE RIDGE	STONE	19.7	9.9	8	119									13.2		
	STA. 70+89.5, RT.	7636 JOHNNYCAKE RIDGE	STONE	20.1	10.1	8	121									13.4		
	STA. 72+97.0, RT.	7646 JOHNNYCAKE RIDGE	ASPH.	20.8	10.8	8	126											
23	STA. 73+74.0, LT.	7651 JOHNNYCAKE RIDGE	ASPH.	31.4	30.1	7	215									23.9		
	STA. 73+72.0, RT.	--	STONE	40.0	29.8	6.9	241									26.8		
	STA. 74+35.0, LT.	7671 JOHNNYCAKE RIDGE	ASPH.	73.8	59.7	6.6	441					14.9				49.0		
24	STA. 76+20.8, LT.	7671 JOHNNYCAKE RIDGE	ASPH.	40.5	27.3	6.2	210									23.3		
33	STA. 113+50.0, RT.	7954 JOHNNYCAKE RIDGE	ASPH.	19.3	9.3	8	114											
	STA. 114+15.0, LT.	7969 JOHNNYCAKE RIDGE	STONE	36.7	22.2	7.9	233											
	STA. 114+58.5, RT.	7962 JOHNNYCAKE RIDGE	ASPH.	32.5	22.5	8	220	7	150									
34	STA. 115+40.4, RT.	7968 JOHNNYCAKE RIDGE	STONE	19.7	13.4	5	83									9.2		
	STA. 115+90.4, RT.	7968 JOHNNYCAKE RIDGE	STONE	16.5	16.3	3	49									5.2		
	STA. 116+12.4, RT.	7974 JOHNNYCAKE RIDGE	STONE	24.7	23.9	3	73									8.3		
	STA. 117+11.0, LT.	7977 JOHNNYCAKE RIDGE	STONE	24.4	14.4	3	155											
	STA. 117+30.2, RT.	7978 JOHNNYCAKE RIDGE	STONE	29.5	25.0	3	82									9.1		
	STA. 118+21.0, LT.	7987 JOHNNYCAKE RIDGE	STONE	20.7	10.7	8.4	132											
	STA. 118+35.2, RT.	7986 JOHNNYCAKE RIDGE	STONE	29.4	19.3	5	122									13.5		
35	STA. 118+79.5, LT.	7995 JOHNNYCAKE RIDGE	STONE	26.2	16.2	8.2	174											
	STA. 119+52.6, RT.	7994 JOHNNYCAKE RIDGE	ASPH.	43.9	32.0	5	190											
	STA. 120+45.0, LT.	8003 JOHNNYCAKE RIDGE	STONE	27.4	17.2	8.3	185											
	STA. 121+46.1, LT.	8011 JOHNNYCAKE RIDGE	STONE	21.9	11.9	8.2	139											
	STA. 121+94.3, RT.	8010 JOHNNYCAKE RIDGE	STONE	27.3	17.4	5	112									12.4		
36	STA. 122+42.6, LT.	8015/8017 JOHNNYCAKE RIDGE	ASPH.	29.1	19.1	8.3	200											
	STA. 123+69.0, RT.	8020 JOHNNYCAKE RIDGE	ASPH.	50.1	46.8	3	145											
40	S.R. 306 STA. 16+67.5, RT.		ASPH.	18.4	12.4	5	77	3	37							12.7		
	S.R. 306 STA. 16+95.2, LT.		ASPH.	19.4	13.4	5	82									9.1		
	S.R. 306 STA. 17+59.3, RT.		ASPH.	21.8	15.8	5	94	5	79							19.2		
41	** S.R. 306 STA. 21+50, LT.		--	34.0	24.0	5	145	5	120							29.4		
42	S.R. 306 STA. 22+33.3, LT.	8282 BROADMOOR ROAD	CONC.	21.0	11.0	5	80	5	55							15.0		
	S.R. 306 STA. 23+49.6, RT.		CONC.	26.3	16.8	8.8	190									21.1		
Sub - Totals									83.3	14.2	198.0	22.0	713.1	72.3	137.3	168.3		
TOTALS									84	230	714	72	138	170				

** LOCATION OF THESE DRIVES ARE APPROXIMATE. EXACT LOCATION OF THESE DRIVES SHALL BE AS DIRECTED BY THE ENGINEER.

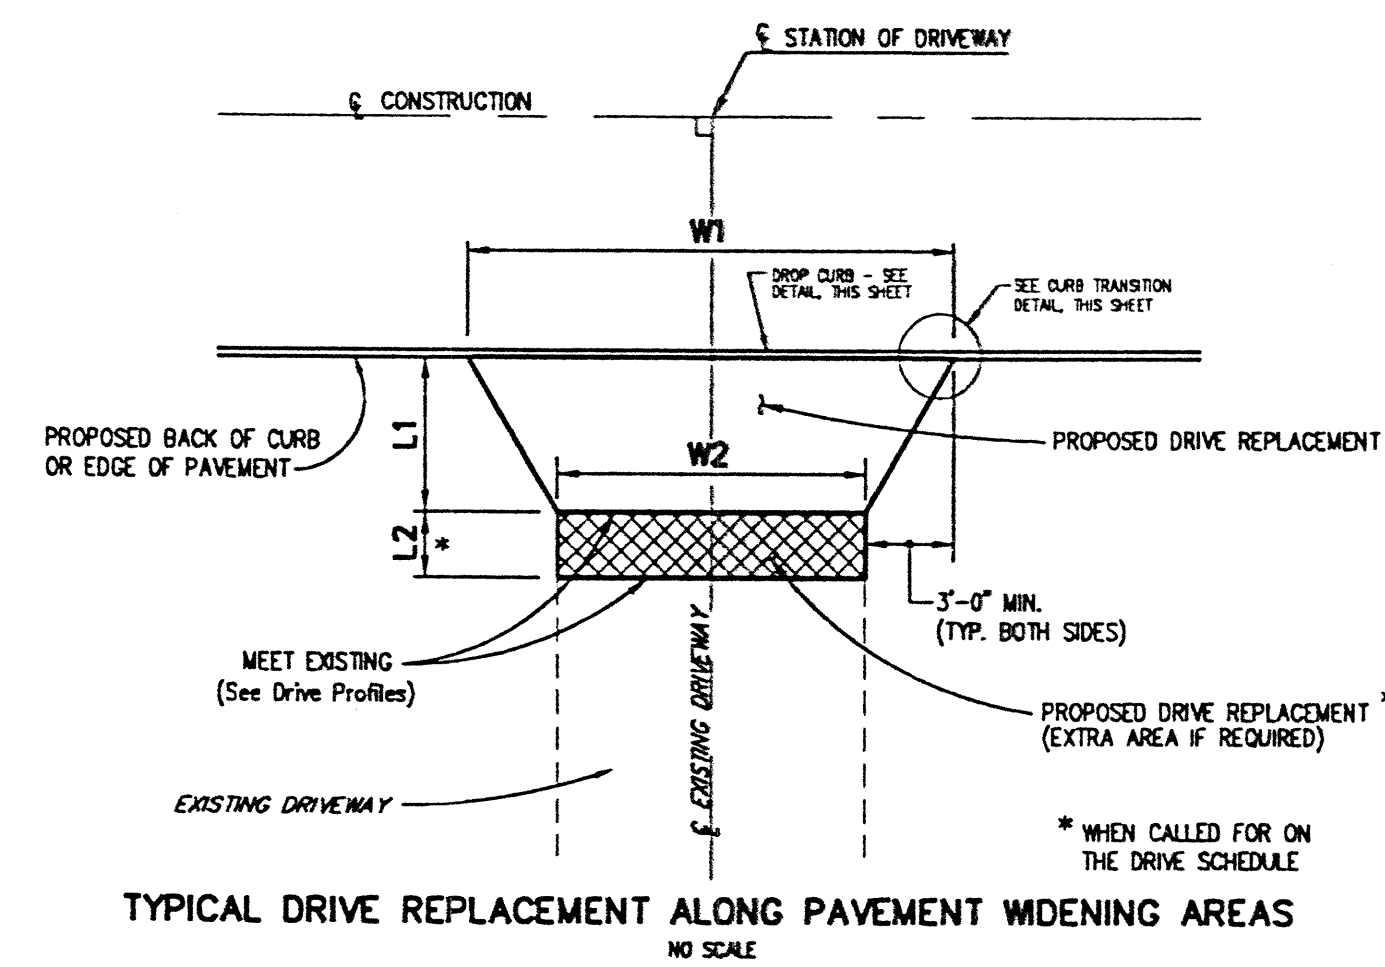

H: 2000\00123.DWG\00123DR1.DWG - PLOT SCALE = 1:20



REV. NO.	DESCRIPTION	DATE	BY	CHK'D.

STATE ROUTE 84
INTERIM WIDENING & RESURFACING
IMPROVEMENTS
CITY OF MENTOR, LAKE COUNTY, OHIO

DATE: AUGUST, 2000
DRAWN BY: J.J.C.
CHECKED BY: C.C.H.
APPROVED BY: C.C.H.
F.B. No. PG.

DRIVEWAY REPLACEMENT
SCHEDULE & DETAILS

SCALE	
HOR.	N.T.S.
VERT.	N.T.S.
CONTRACT No.	
00123	
SHEET No. OF	
52	74