

RAMP STATIONS		RAMP	CASE	REF NUMBER	202	604	604	SPECIAL	202
FROM	TO			DRN/CRB	CURB REMOVED AS PER PLAN	CATCH BASIN ADJUSTED TO GRADE	CATCH BASIN RECONSTR TO GRADE	PRECOM-PRESSED BITUMIN IMPREG. FORM	PORTIONS OF STRUCTURE REMOVED
					LIN. FT.	EACH	EACH	LIN. FT.	LUMP
0 + 0.00	4 + 98.00	A	II	1-C	498				
4 + 98.00	5 + 50.00	A	IA	2-C	52				
7 + 88.70		B	II	1-D		1			
6 + 0.00		D		6-D			1		
11 + 18.69	11 + 78.70	D	IB	3-C	60				
11 + 78.70	13 + 40.00	D	III	4-C				161.3	LUMP
13 + 40.00	16 + 18.69	D	II	2-D/5-C	278.7	2			
1 + 41.25	2 + 35.57	D SP	IA	6-C	94.3				
0 + 0.00	4 + 50.00	E	II	7-C	450				
4 + 50.00	5 + 53.50	E	IA	8-C	103.5				
616+ 62.00		ML L		3-D		1			
617+ 60.00		ML L		4-D		1			
7 + 00.00	8 + 04.80	G	IA		104.8				
8 + 04.80	12 + 88.77	G	II	5-D	484.0	4			
TOTAL					2122	9	1	162	LUMP


ITEM 202 - CURB REMOVED, AS PER PLAN

THE FOLLOWING DETAILS AND SPECIFICATIONS SHALL APPLY TO THIS ITEM OF WORK

CASE I -

A- MODIFIED SPECIAL PORTLAND CEMENT CONCRETE CURB REMOVED
OR

B- 2' WIDE MODIFIED SPECIAL PORTLAND CEMENT CONCRETE CURB REMOVED

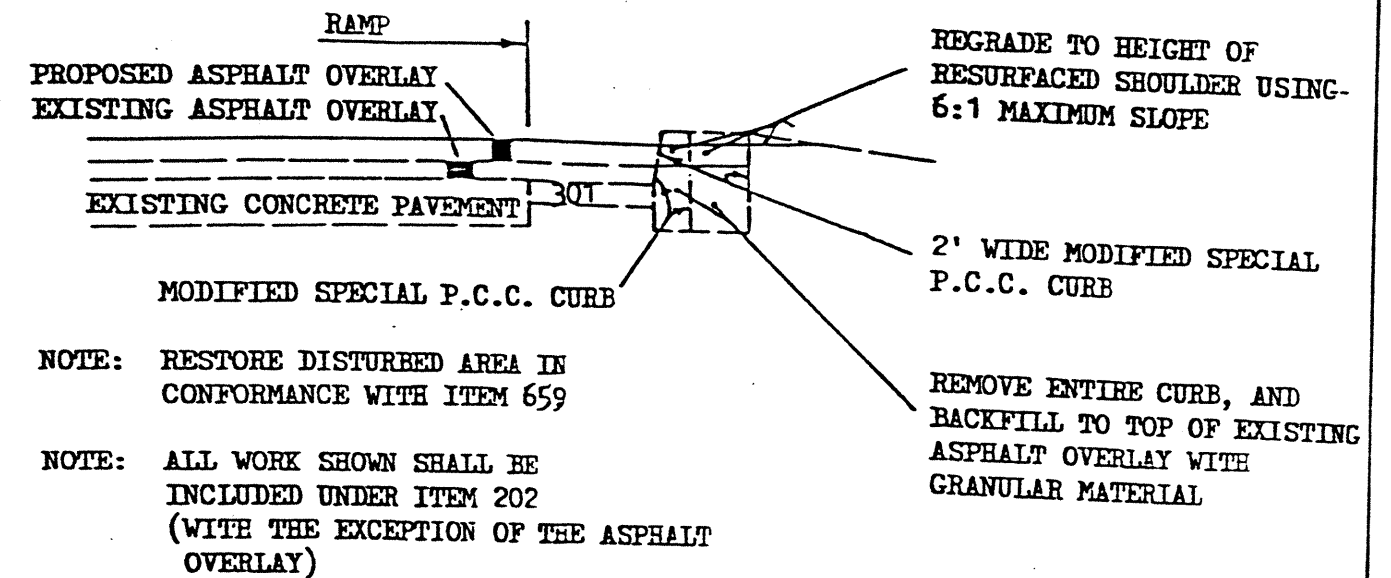

CASE II -

SPECIAL PORTLAND CEMENT CONCRETE CURB REMOVED

