


LAKE COUNTY
LAK 90-3.56

QUANTITIES
Made: LJD 2-18-73
Ckd: REM 2-23-73

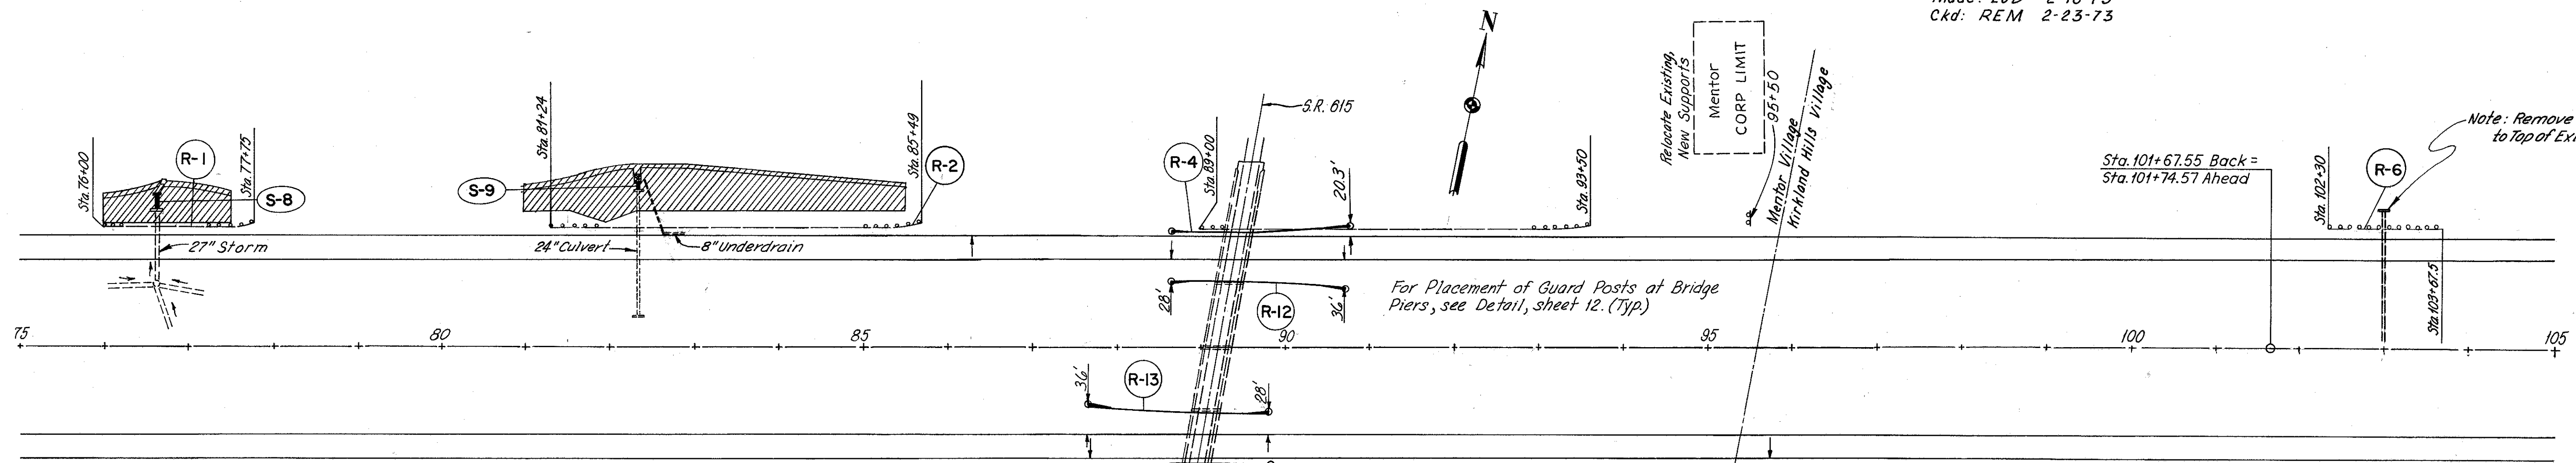


GUARD RAIL						
Ref. No.	Station	Side	202	202	606	606
			G.R. Removed for Reuse or Storage Painted	G.R. Removed for Reuse Galv.	Anchor Assembly	G.R. Type 5 as per plan
	From	To	Lin. Ft.	Lin. Ft.	Each	Lin. Ft.
R-1	76+00	77+75	Lt.	175		
R-2	81+24	85+49	Lt.	425		
R-3	87+60	89+72.5	Rt.		150	2 162.5
R-4	88+73	90+85.5	Lt.	450		2 162.5
R-5	95+75	108+07	Rt.	1200		2 1175
R-6	102+30	103+67.5	Lt.	137.5		
R-7	105+46	107+83.5	Lt.	237.5		
R-8	119+80	122+05	Rt.	150		2 175
R-9	124+10	126+35	Lt.	137.5		2 175
Sub-Totals			2912.5	150	10	1850

GUARD RAIL						
Ref. No.	Station	Side	202	202	606	606
			G.R. Removed for Reuse or Storage Painted	G.R. Removed for Reuse Galv.	Anchor Assembly	G.R. Type 5 as per plan
	From	To	Lin. Ft.	Lin. Ft.	Each	Lin. Ft.
R-10	132+80	134+92.5	Rt.	137.5		2 162.5
R-11	131+56	133+68.5	Lt.	137.5		2 162.5
R-12	88+63	90+75.5	Lt.			2 162.5
R-13	87+70	89+82.5	Rt.			2 162.5
R-14	123+25	125+50	Lt.			2 175
R-15	120+70	122+95	Rt.			2 175
R-16	131+90	134+15	Lt.			2 175
R-17	132+40	134+65	Rt.			2 175
Sub-Totals			275		16	1350
Totals			3187.5	150	26	3200

* Note Station Equation: Sta. 101+67.55 Back = Sta. 101+74.57 Ahead

ESTIMATED QUANTITIES			
ITEM	DESCRIPTION	QUANTITY	UNIT
202	Portion of Structure Removed Sta. 103+00 Lt.	Lump	Lump

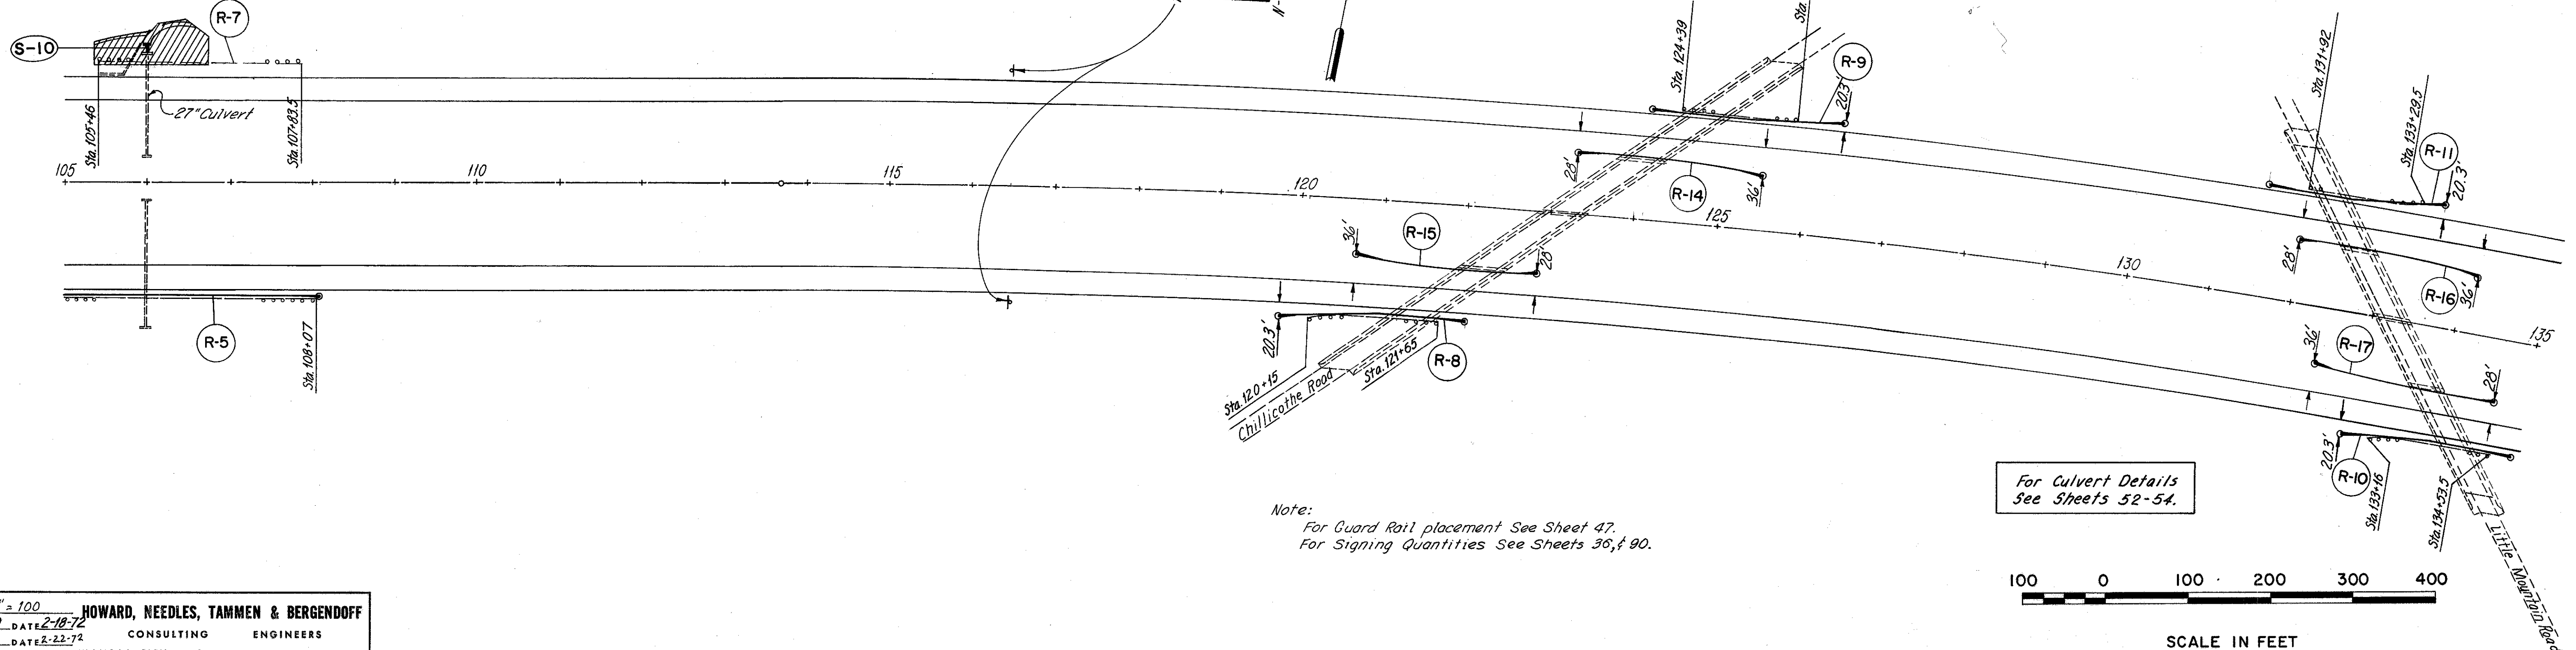

SCALE 1" = 100' HOWARD, NEEDLES, TAMMEN & BERGENDOFF
MADE LJD DATE 2-18-72 CONSULTING ENGINEERS
TRCD B.P. DATE 2-22-72 KANSAS CITY CLEVELAND NEW YORK
CKD REM DATE 2-23-72

