


QUANTITIES
Made: LJD 2-21-72
Ckd: REM 2-23-72

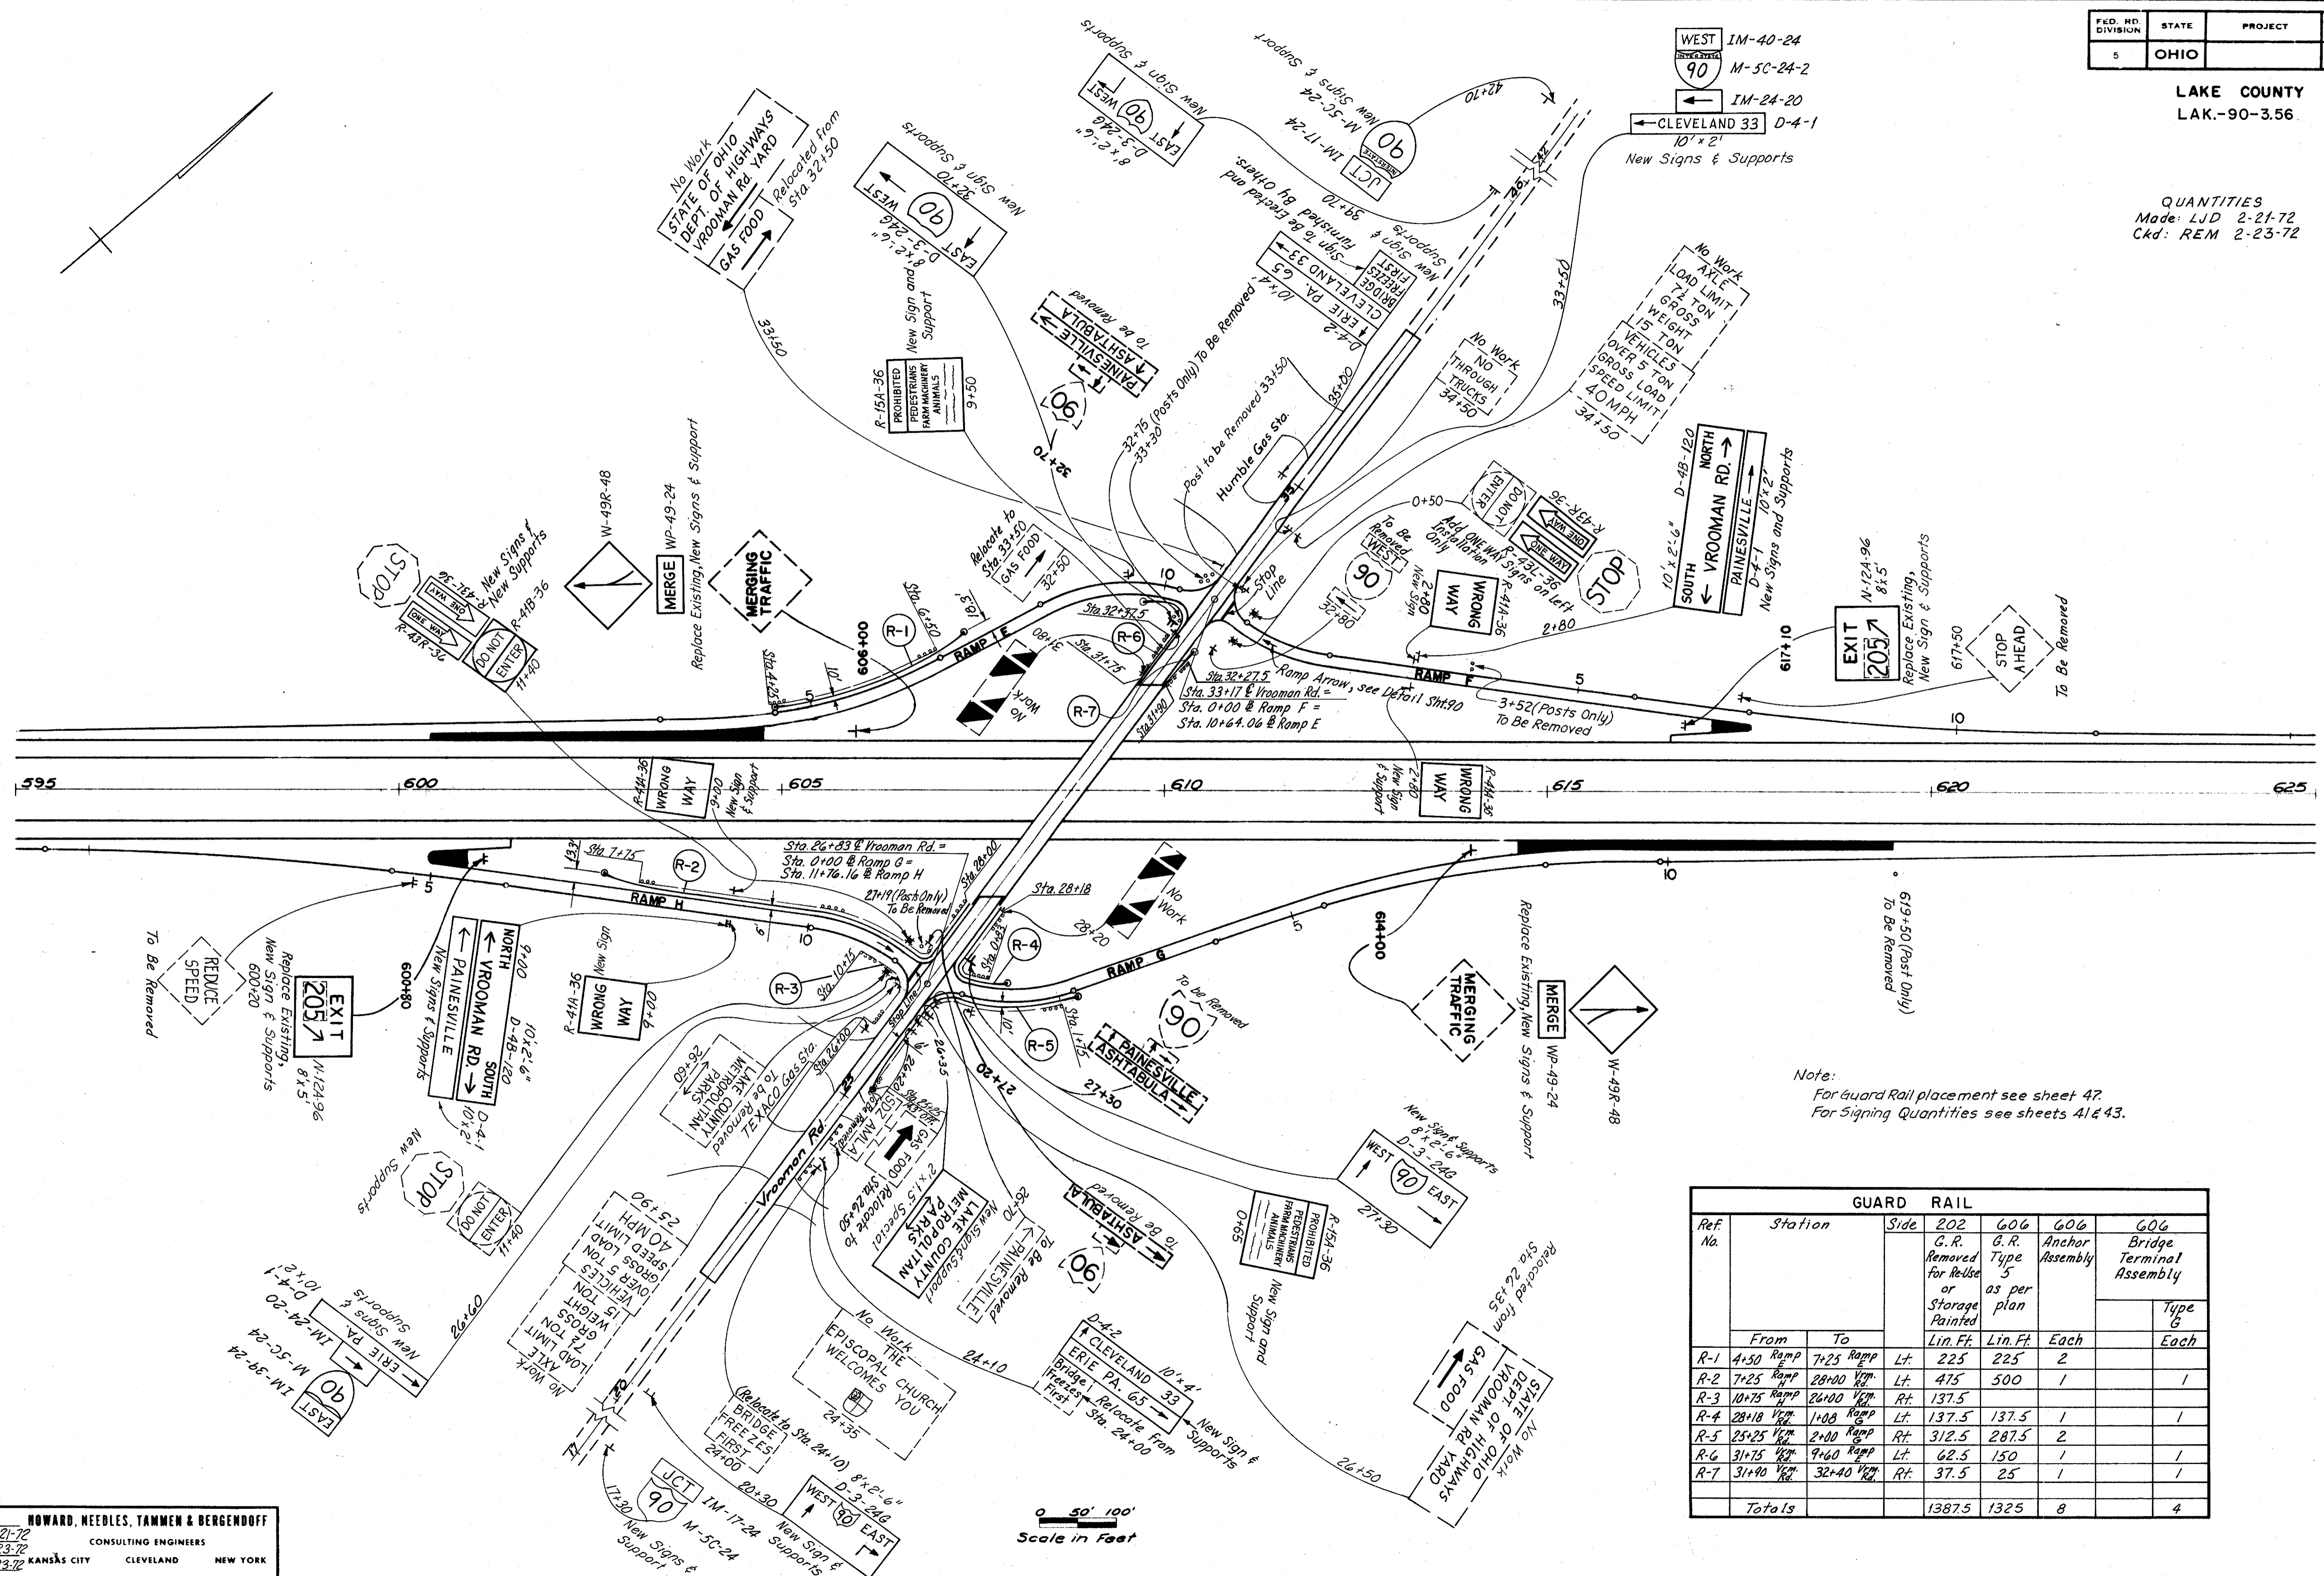

Note:
For Guard Rail placement see sheet 47.
For Signing Quantities see sheets 41 & 43.

Ref. No.	Station		GUARD RAIL				
	From	To	Side	602	606	606	
			G.R. Removed for Reuse or Storage Painted	G.R. Type 5 as per plan	Anchor Assembly	Bridge Terminal Assembly	
Lin. Ft.	Lin. Ft.	Each	Each	Each	Each		
R-1	4+50 Ramp	7+25 Ramp	Lt.	225	225	2	
R-2	7+25 Ramp	28+00 Vgn.	Lt.	475	500	1	1
R-3	10+75 Ramp	26+00 Vgn.	Rt.	137.5			
R-4	28+18 Vgn.	1+00 Ramp	Lt.	137.5	137.5	1	1
R-5	25+25 Vgn.	2+00 Ramp	Rt.	312.5	287.5	2	
R-6	31+75 Vgn.	9+60 Ramp	Lt.	62.5	150	1	1
R-7	31+90 Vgn.	32+40 Vgn.	Rt.	37.5	25	1	1
Totals				1387.5	1325	8	4

SCALE 1"=100'
MADE LJD DATE 2-21-72
TRCD RCK DATE 2-23-72
CKD REM DATE 2-23-72
HOWARD, NEEDLES, TAMMEN & BERGENDOFF
CONSULTING ENGINEERS
KANSAS CITY CLEVELAND NEW YORK

VROOMAN RD. INTERCHANGE