



QUANTITIES
Made: LJD 4-20-72
Ckd: RAE 5-25-72

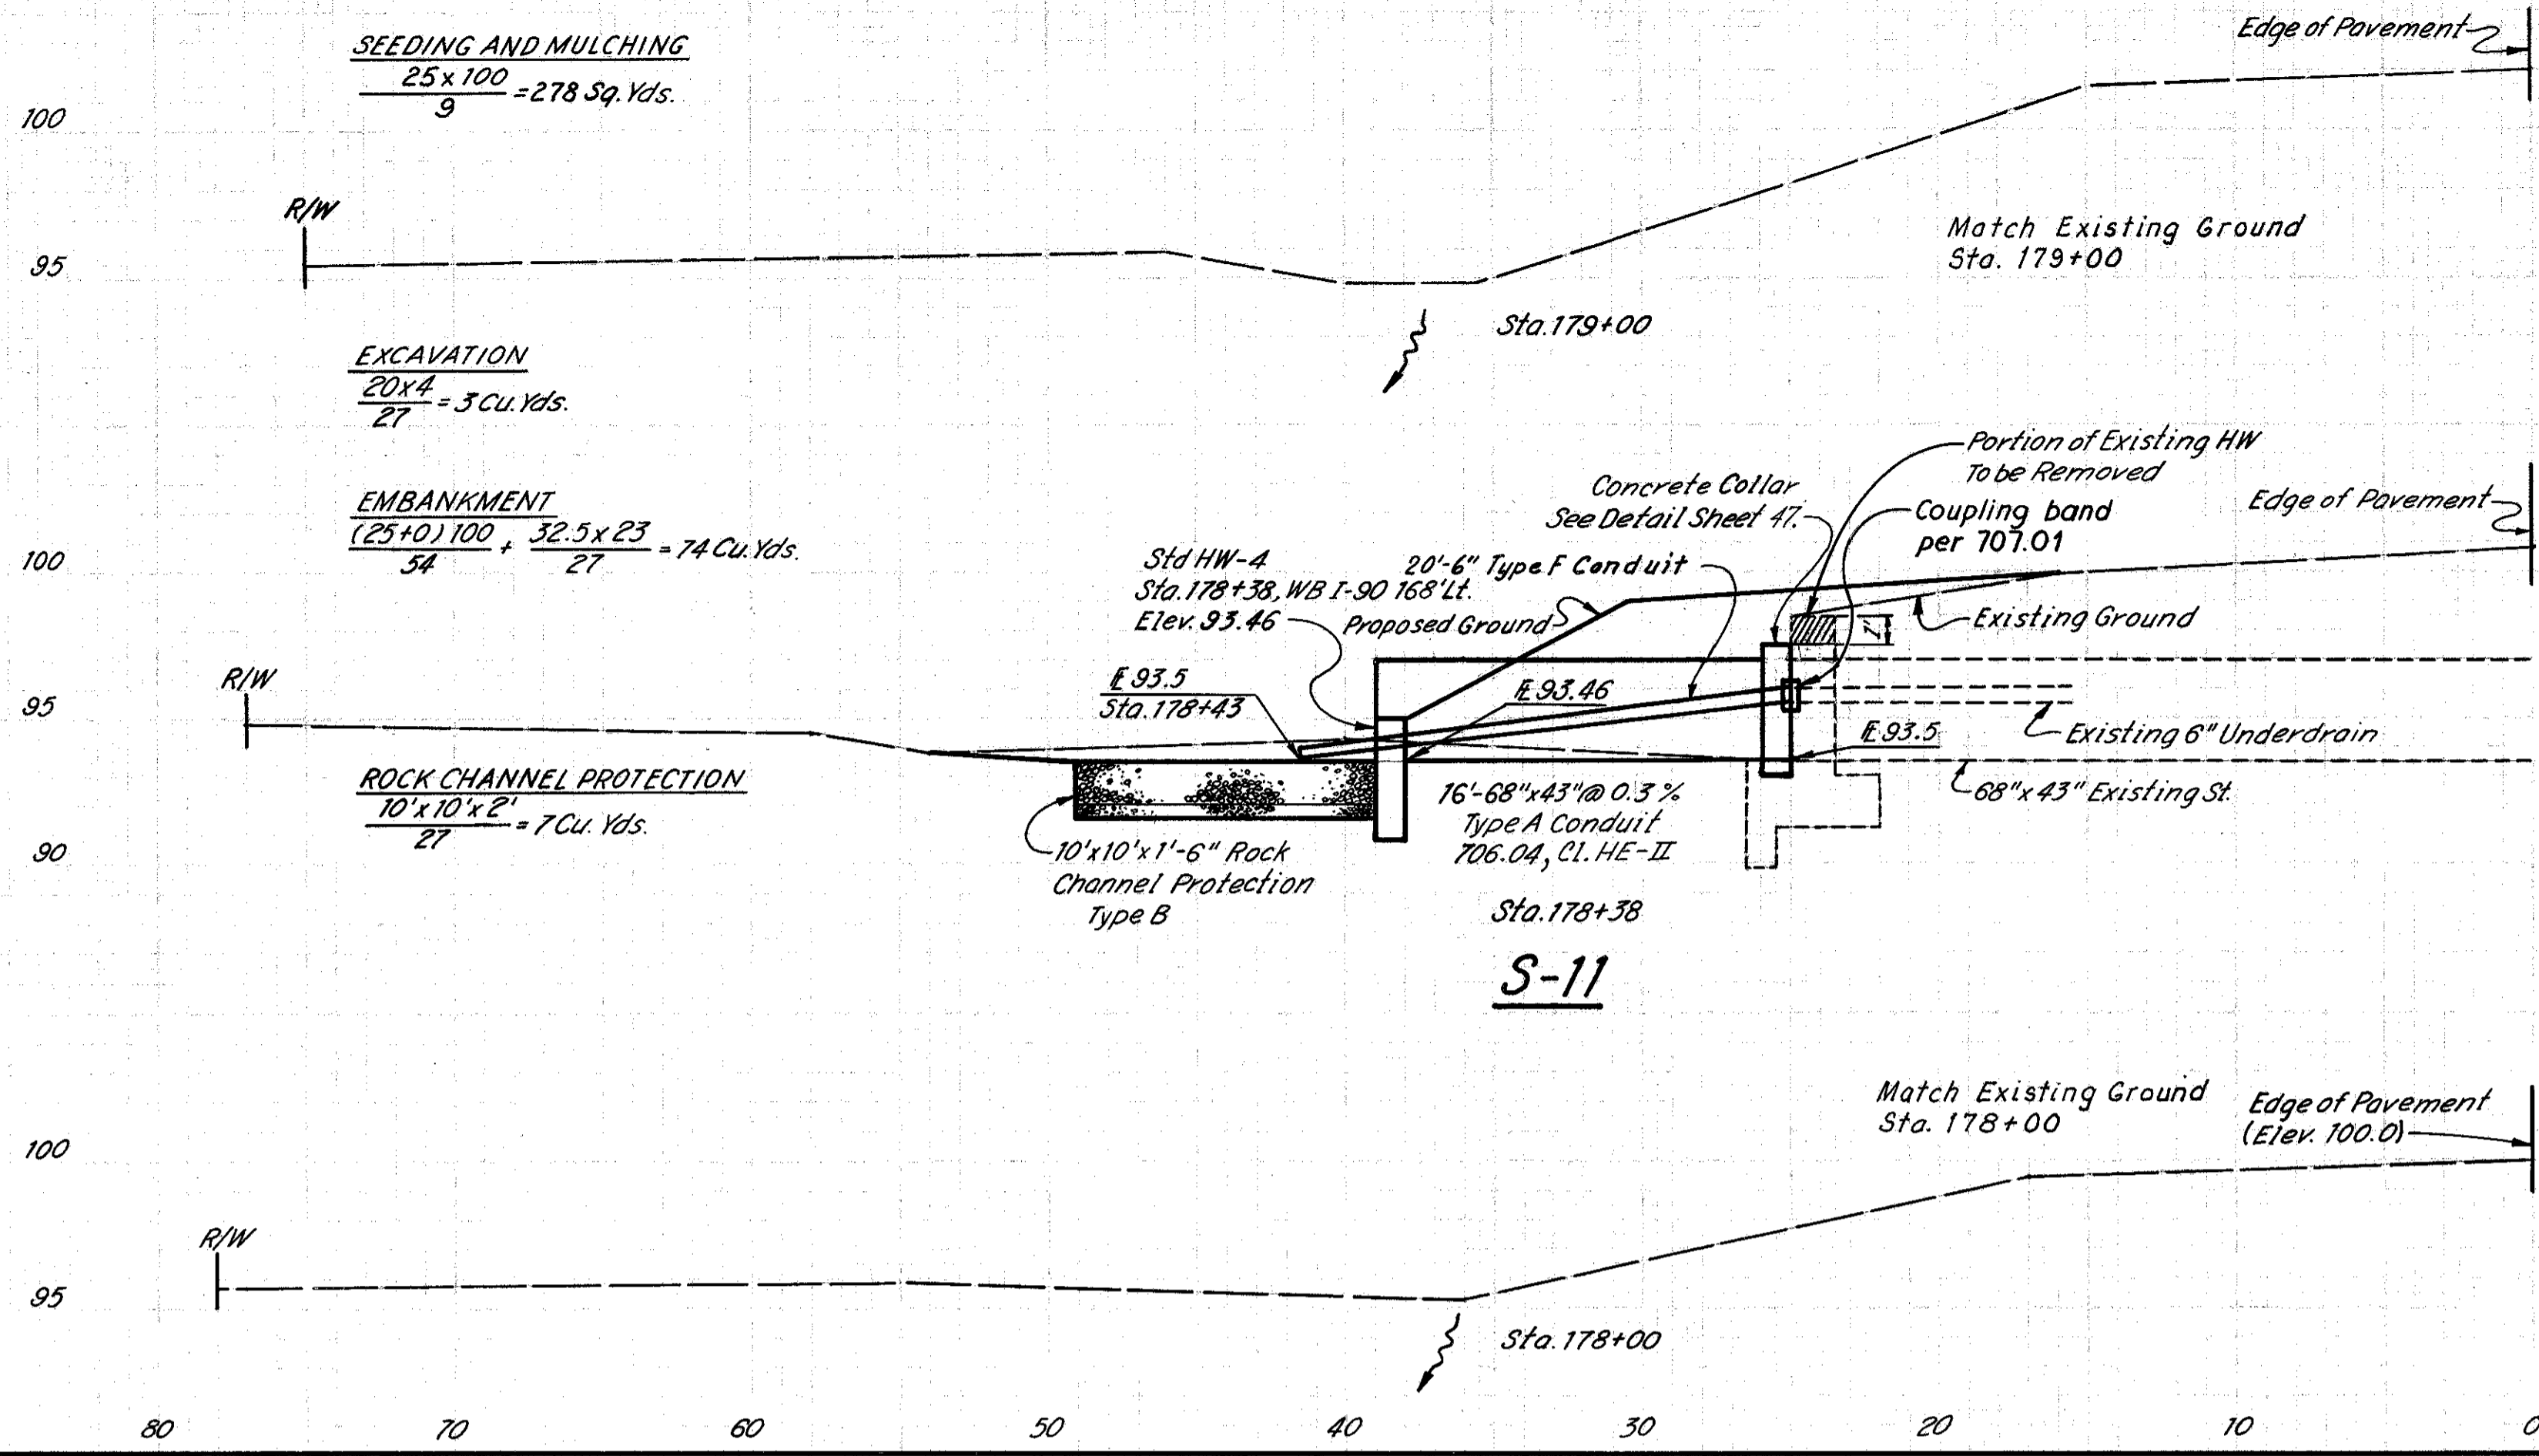

ESTIMATED QUANTITIES S-11

ITEM	DESCRIPTION	QUANTITY	UNIT
202	Portion of Structure Removed	Lump	Lump Sum
203	Excavation	3	Cu. Yds.
203	Embankment	74	Cu. Yds.
601	Rock Channel Protection Type B	7	Cu. Yds.
602	Concrete Masonry	1.32	Cu. Yds.
603	68" x 43" Conduit Type A 706.04 as per plan, Cl. HE-II	16	Lin. Ft.
603	6" Conduit Type F	20	Lin. Ft.
659	Seeding & Mulching	278	Sq. Yds.

(For Plan View See Sheet No. 14)

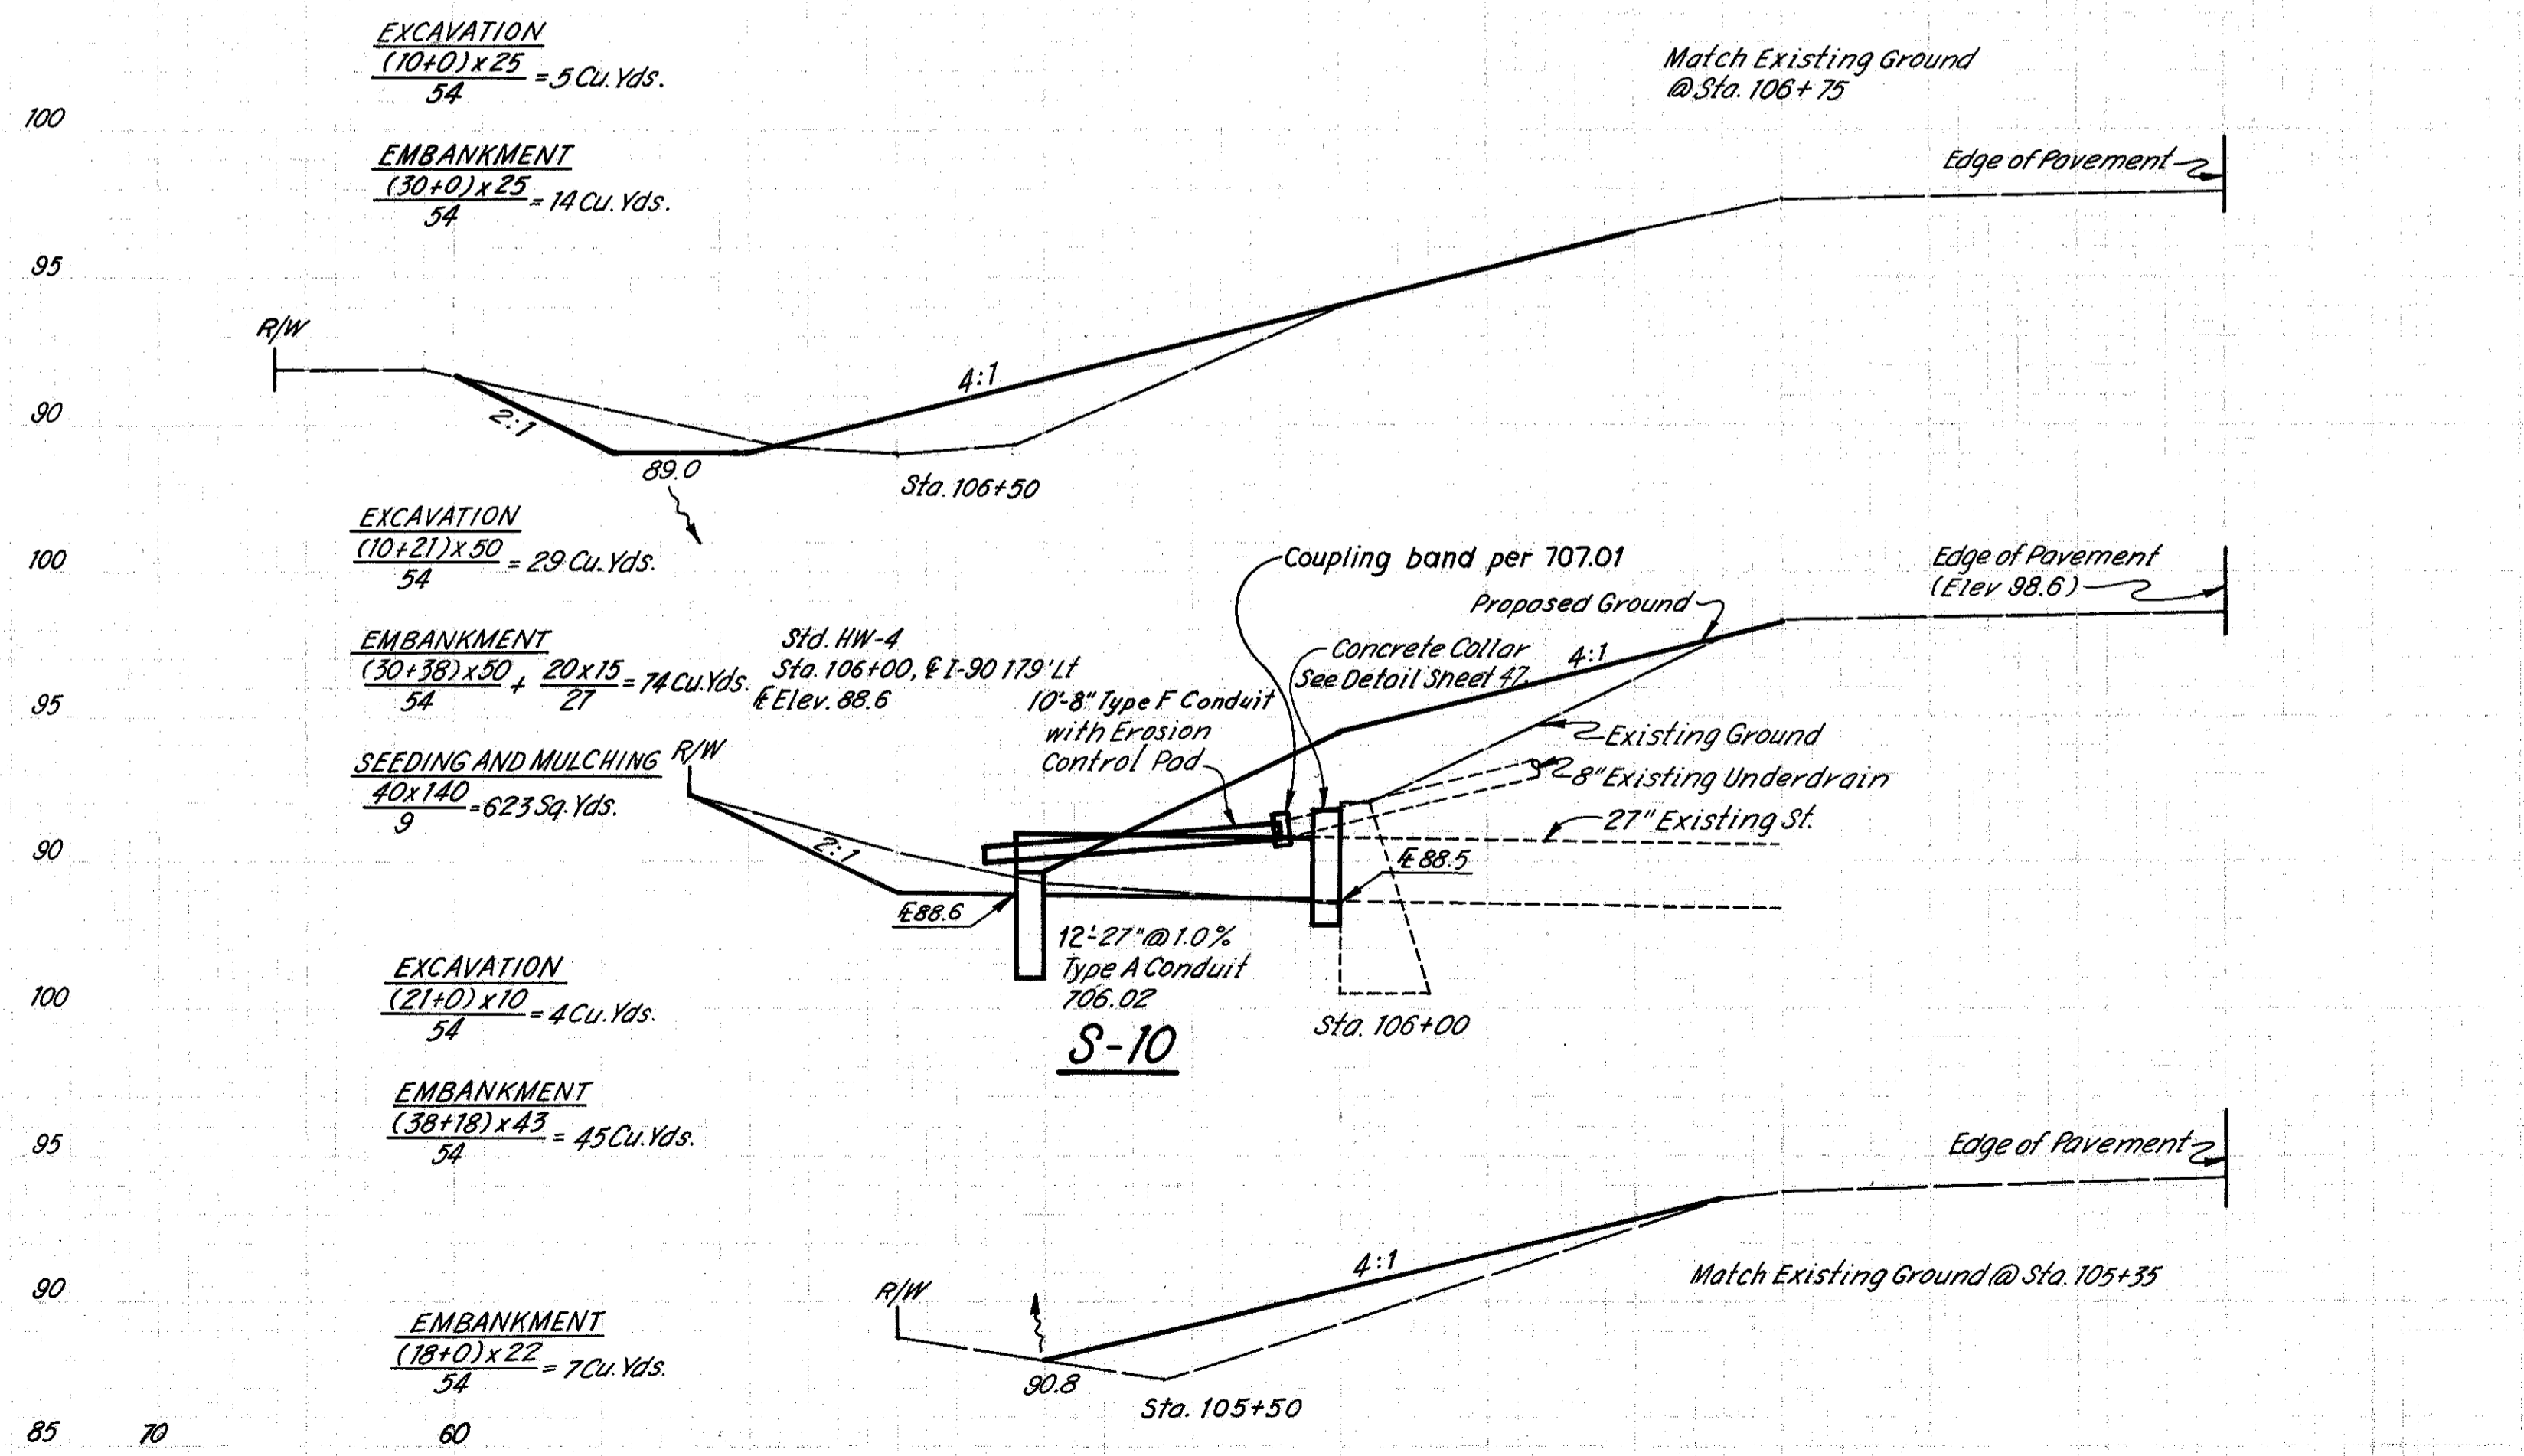

ESTIMATED QUANTITIES S-10

ITEM	DESCRIPTION	QUANTITY	UNIT
203	Excavation	38	Cu. Yds.
203	Embankment	140	Cu. Yds.
602	Concrete Masonry	0.49	Cu. Yds.
603	27" Conduit Type A 706.02 As per plan	12	Lin. Ft.
603	8" Conduit Type F	10	Lin. Ft.
659	Seeding & Mulching	623	Sq. Yds.

(For Plan View See Sheet No. 13)

5-30-72
5-31-72
4-20-72
4-20-72
5-25-72

AC & FEF
LUD & TAF
LUD
RAE