


LAKE COUNTY  
LAK.-90-356

QUANTITIES  
Made: LJD 4-4-72  
Ckd: DSM 5-23-72

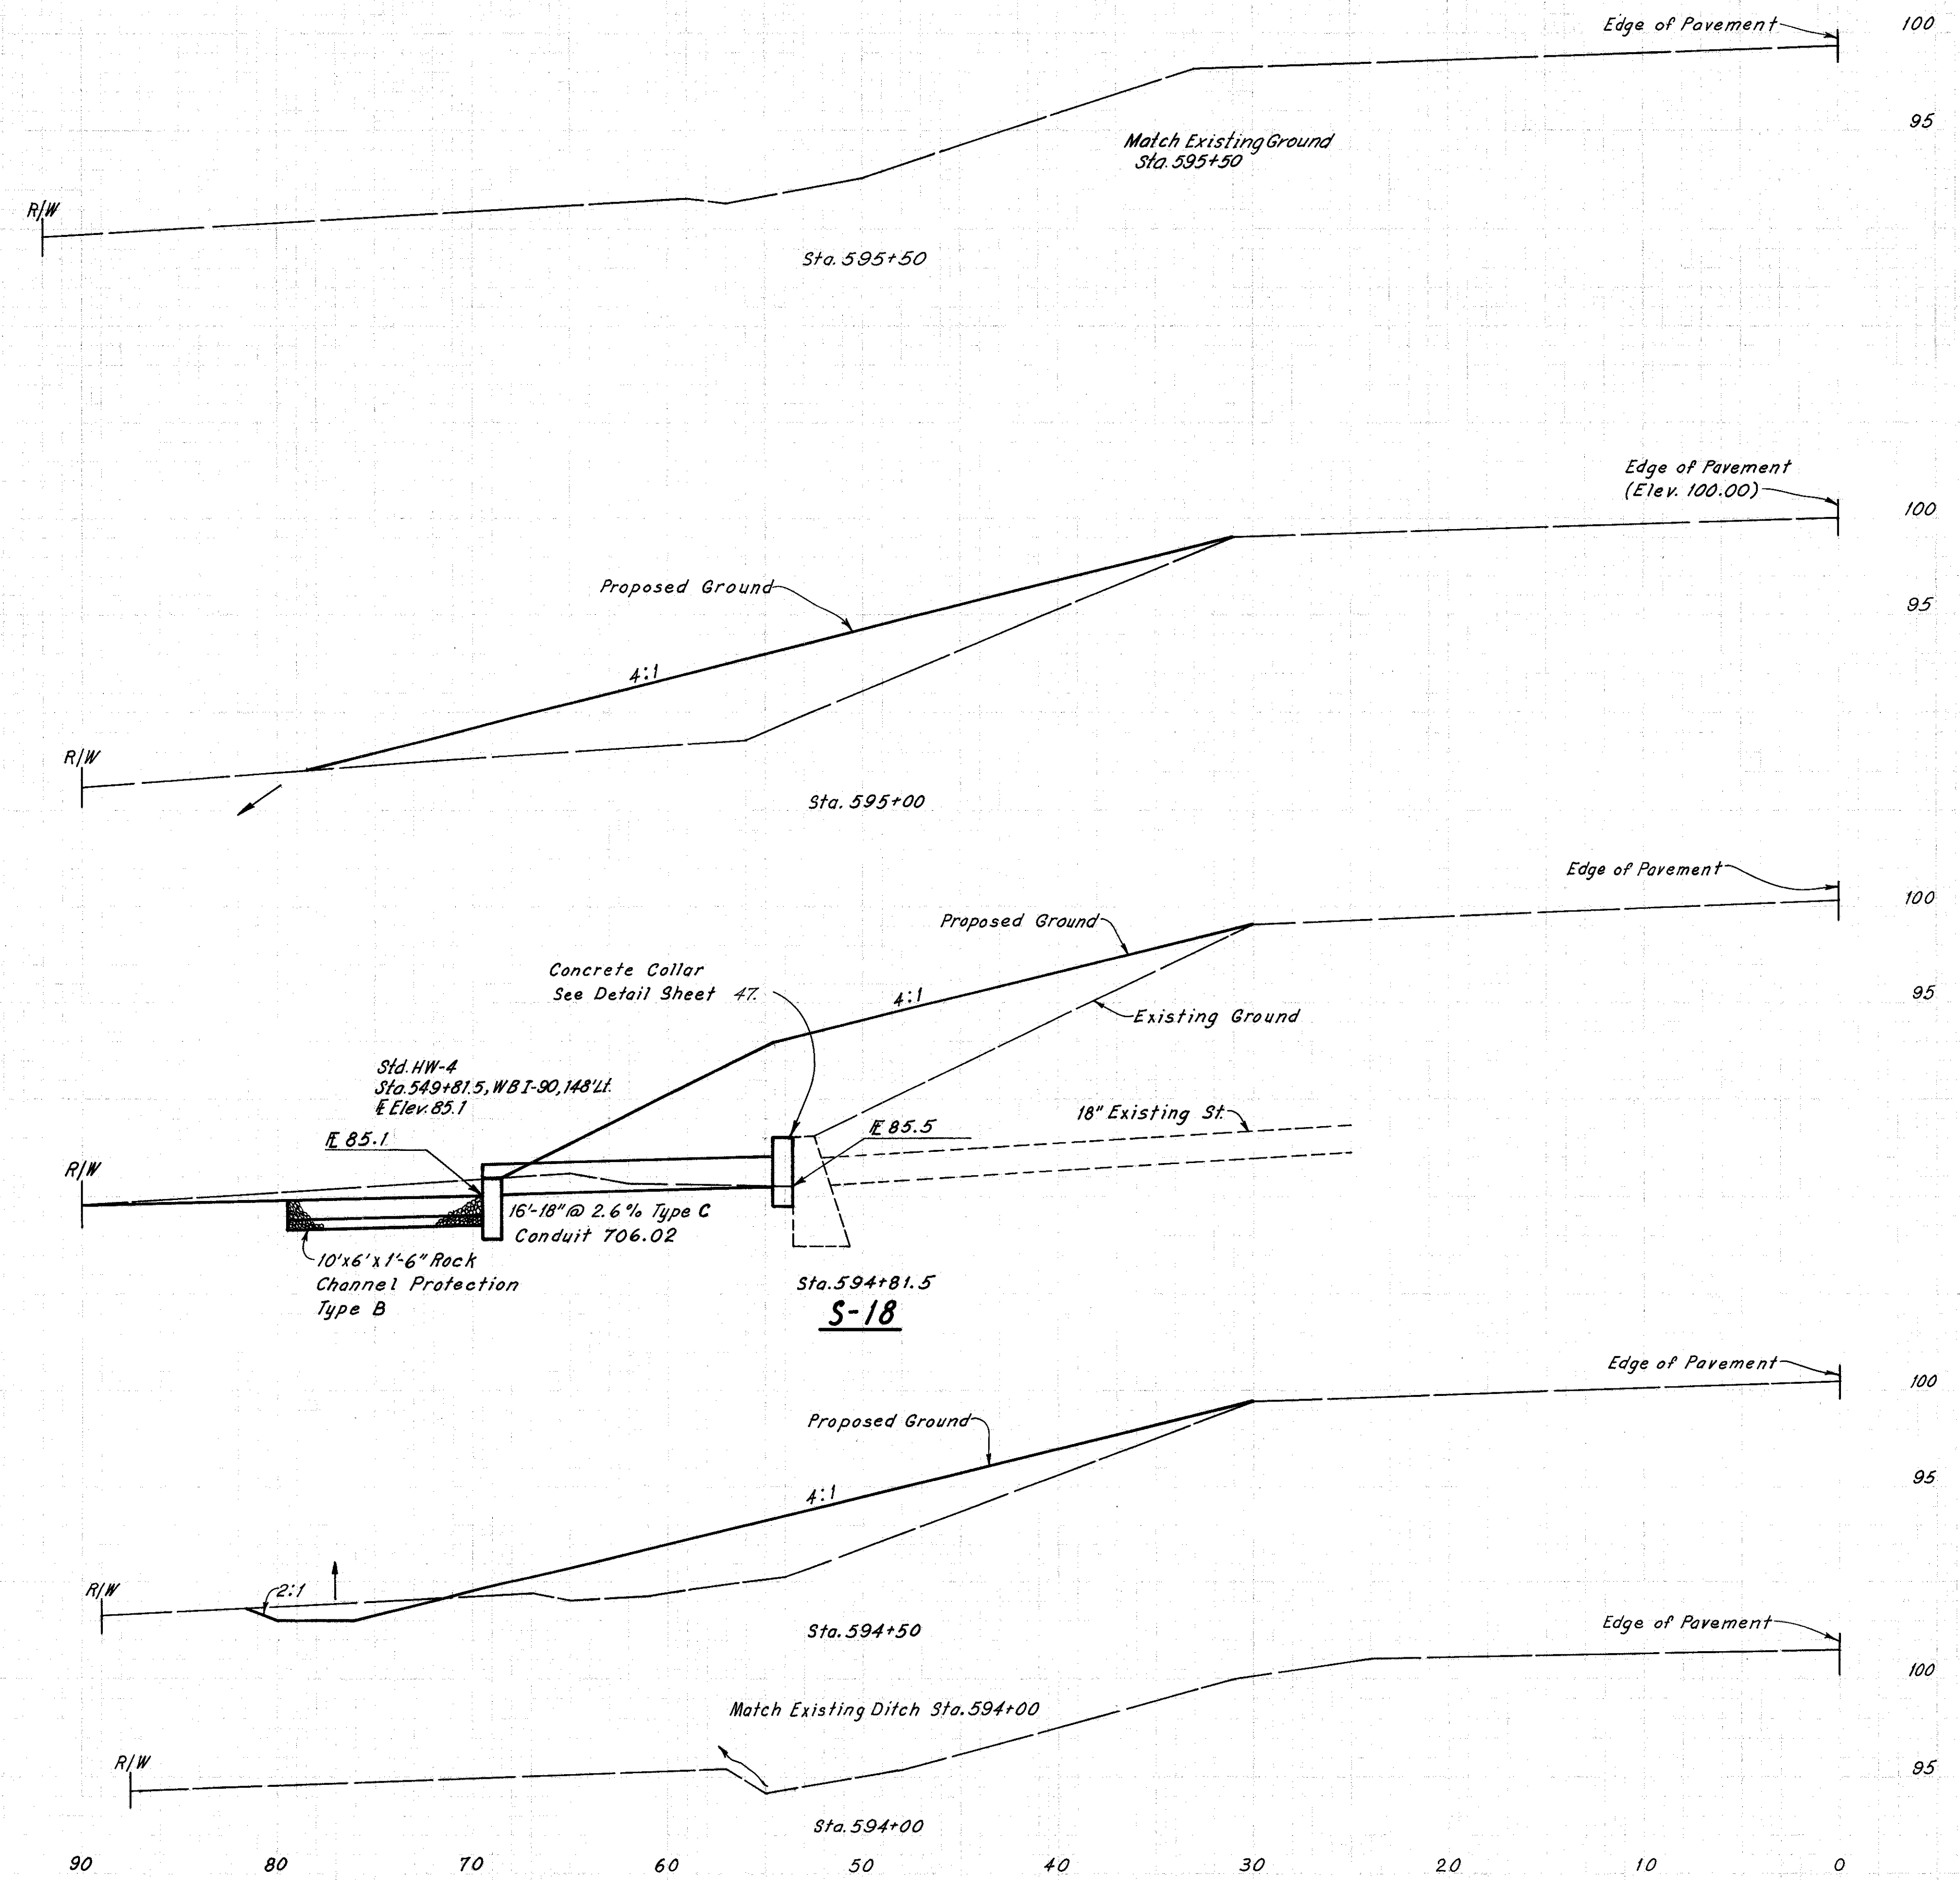

SEEDING & MULCHING  
 $\frac{45 \times 150}{9} = 750 \text{ Sq. Yds.}$

EMBANKMENT  
 $\frac{(98+0) \times 50}{54} = 91 \text{ Cu. Yds.}$

EXCAVATION  
 $\frac{15 \times 6}{27} = 3 \text{ Cu. Yds.}$

EMBANKMENT  
 $\frac{(98+82) \times 19.5 + 45 \times 8}{54 + 27} = 78 \text{ Cu. Yds.}$

ROCK CHANNEL PROTECTION  
 $\frac{6 \times 10 \times 2}{27} = 4 \text{ Cu. Yds.}$

EXCAVATION  
 $\frac{(13+0) \times 31.5}{54} = 8 \text{ Cu. Yds.}$

EMBANKMENT  
 $\frac{(82+68) \times 31.5}{54} = 88 \text{ Cu. Yds.}$

EXCAVATION  
 $\frac{(13+0) \times 50}{54} = 12 \text{ Cu. Yds.}$

EMBANKMENT  
 $\frac{(68+0) \times 30}{54} = 63 \text{ Cu. Yds.}$

ESTIMATED QUANTITIES S-18			
ITEM	DESCRIPTION	QUANTITY	UNIT
203	Excavation	23	Cu. Yds.
203	Embankment	320	Cu. Yds.
601	Rock Channel Protection Type B	4	Cu. Yds.
602	Concrete Masonry	0.31	Cu. Yds.
603	18" Conduit Type C 706.02 As per plan	16	Lin. Ft.
659	Seeding & Mulching	750	Sq. Yds.

(For Plan View See Sheet No. 21)

3-28-72  
 4-2-72  
 4-4-72  
 5-22-72  
 H.C.  
 J.D.  
 M.S.  
 9/7  
 9/7