


LAKE COUNTY
LAK-90-3.56


QUANTITIES
Made: LJD 4-12-72
Ckd: DSM 5-23-72

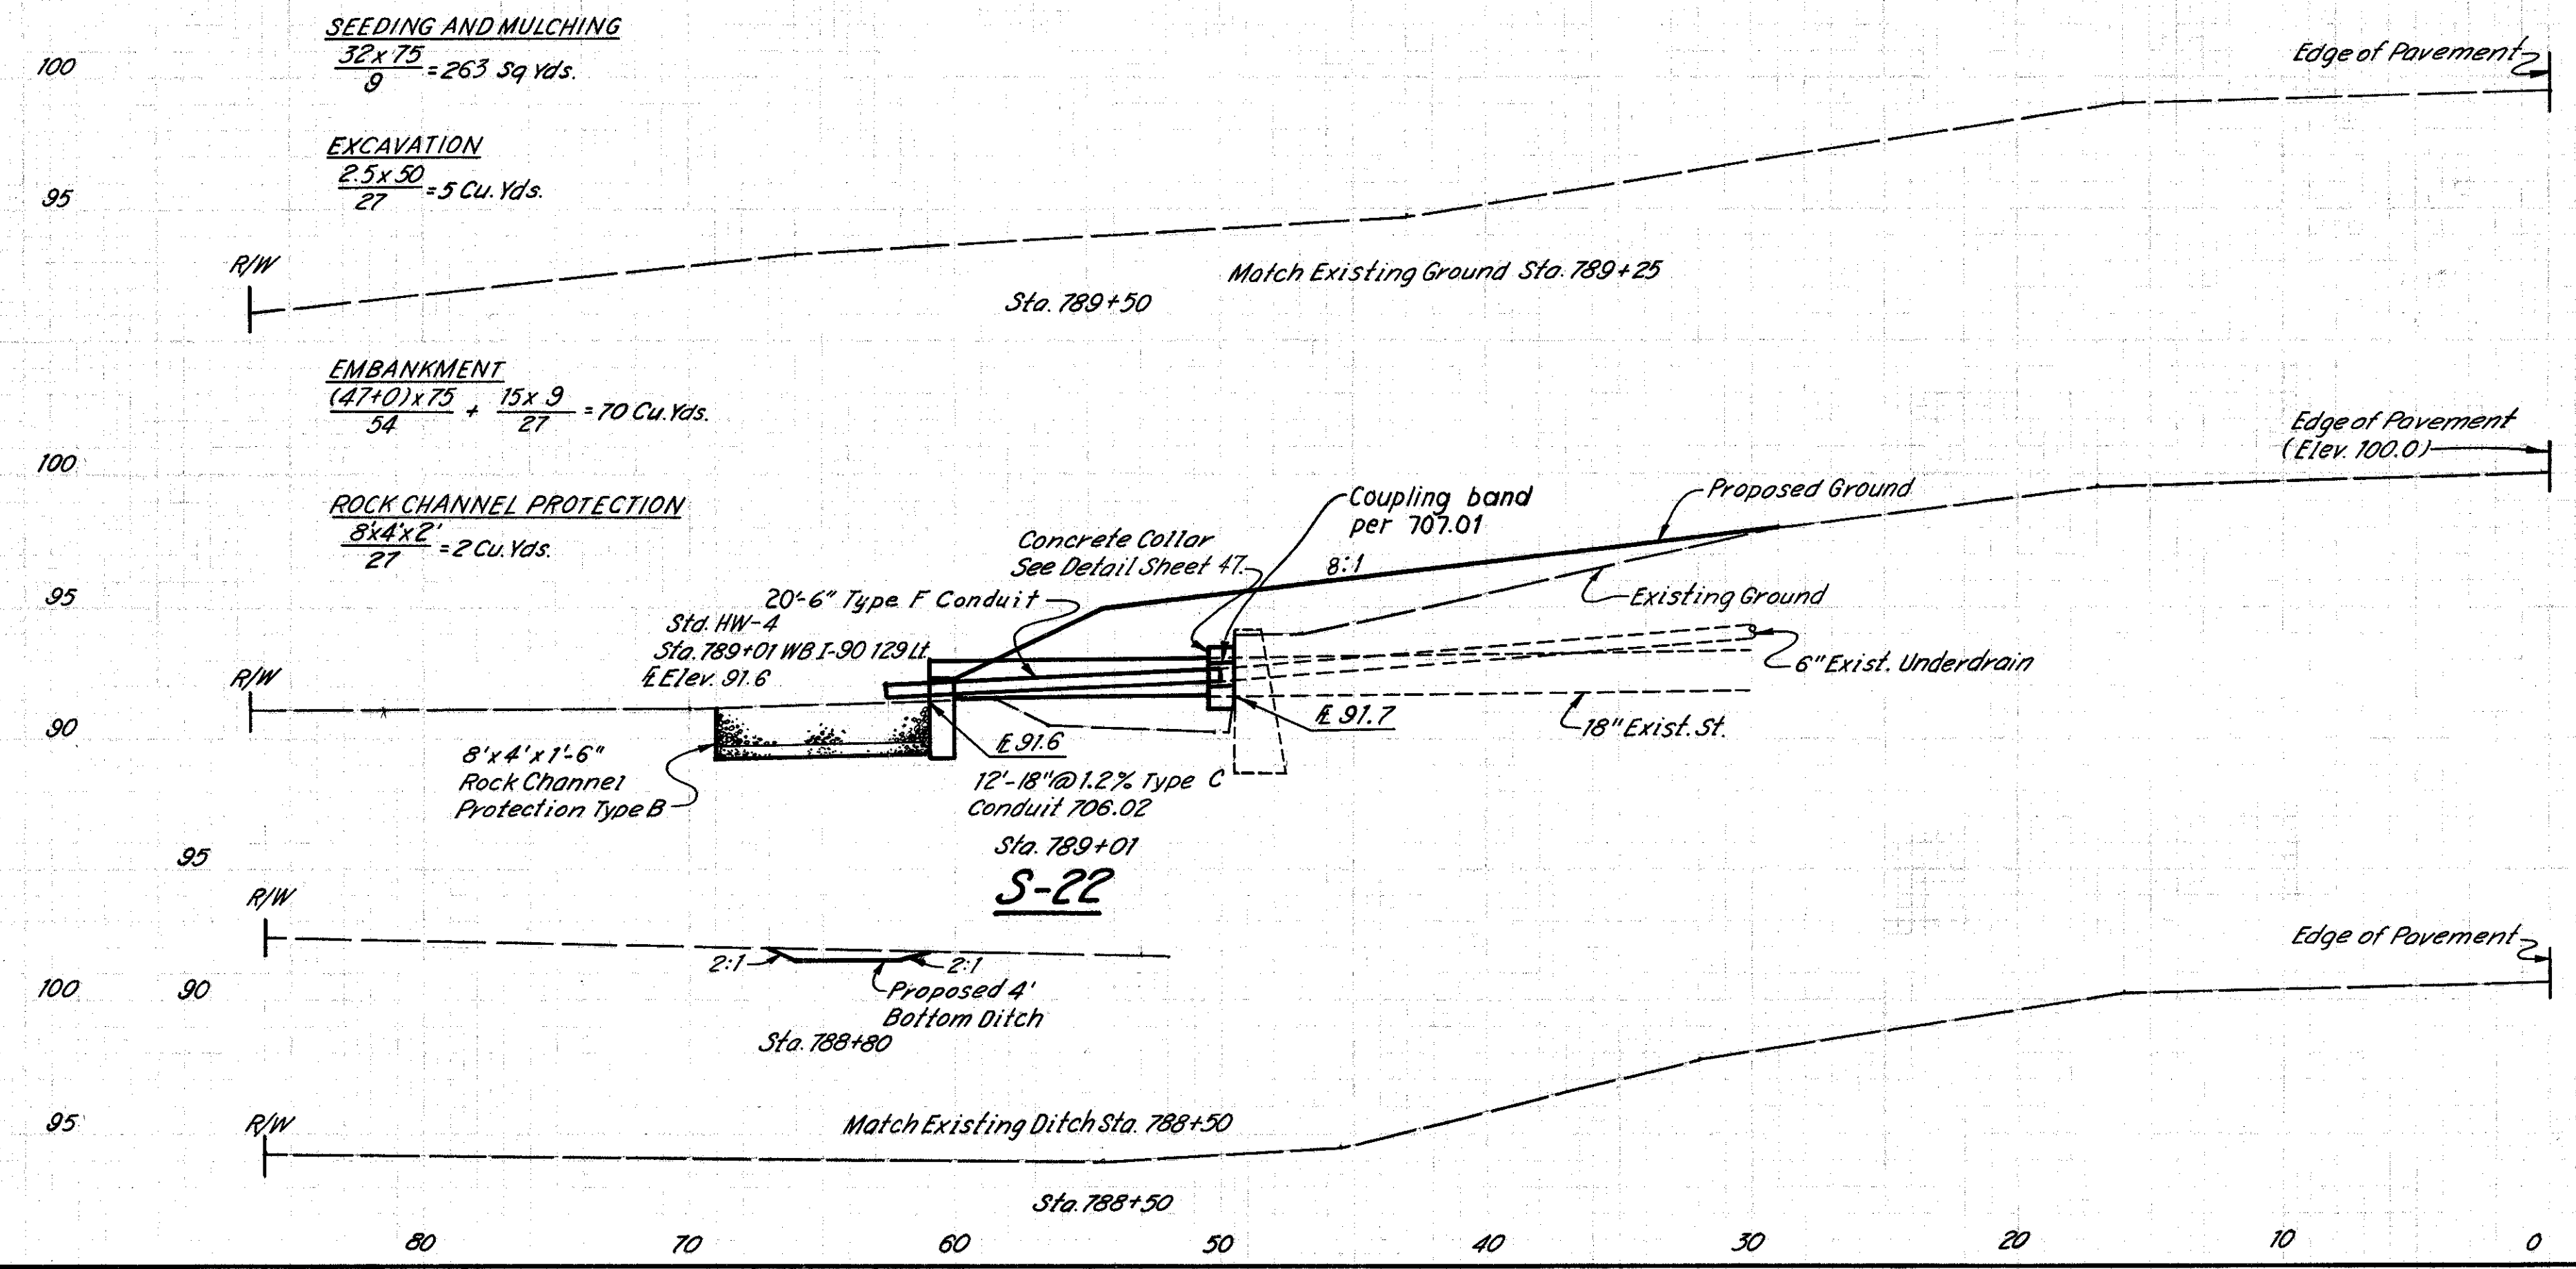

ESTIMATED QUANTITIES S-22

ITEM	DESCRIPTION	QUANTITY	UNIT
203	Excavation	5	Cu. Yds.
203	Embankment	70	Cu. Yds.
601	Rock Channel Protection Type B	2	Cu. Yds.
602	Concrete Masonry	0.31	Cu. Yds.
603	18" Conduit Type C 706.02 As per plan	12	Lin. Ft.
603	6" Conduit Type F		Lin. Ft.
659	Seeding and Mulching	263	Sq. Yds.

(For Plan View See Sheet No. 24)

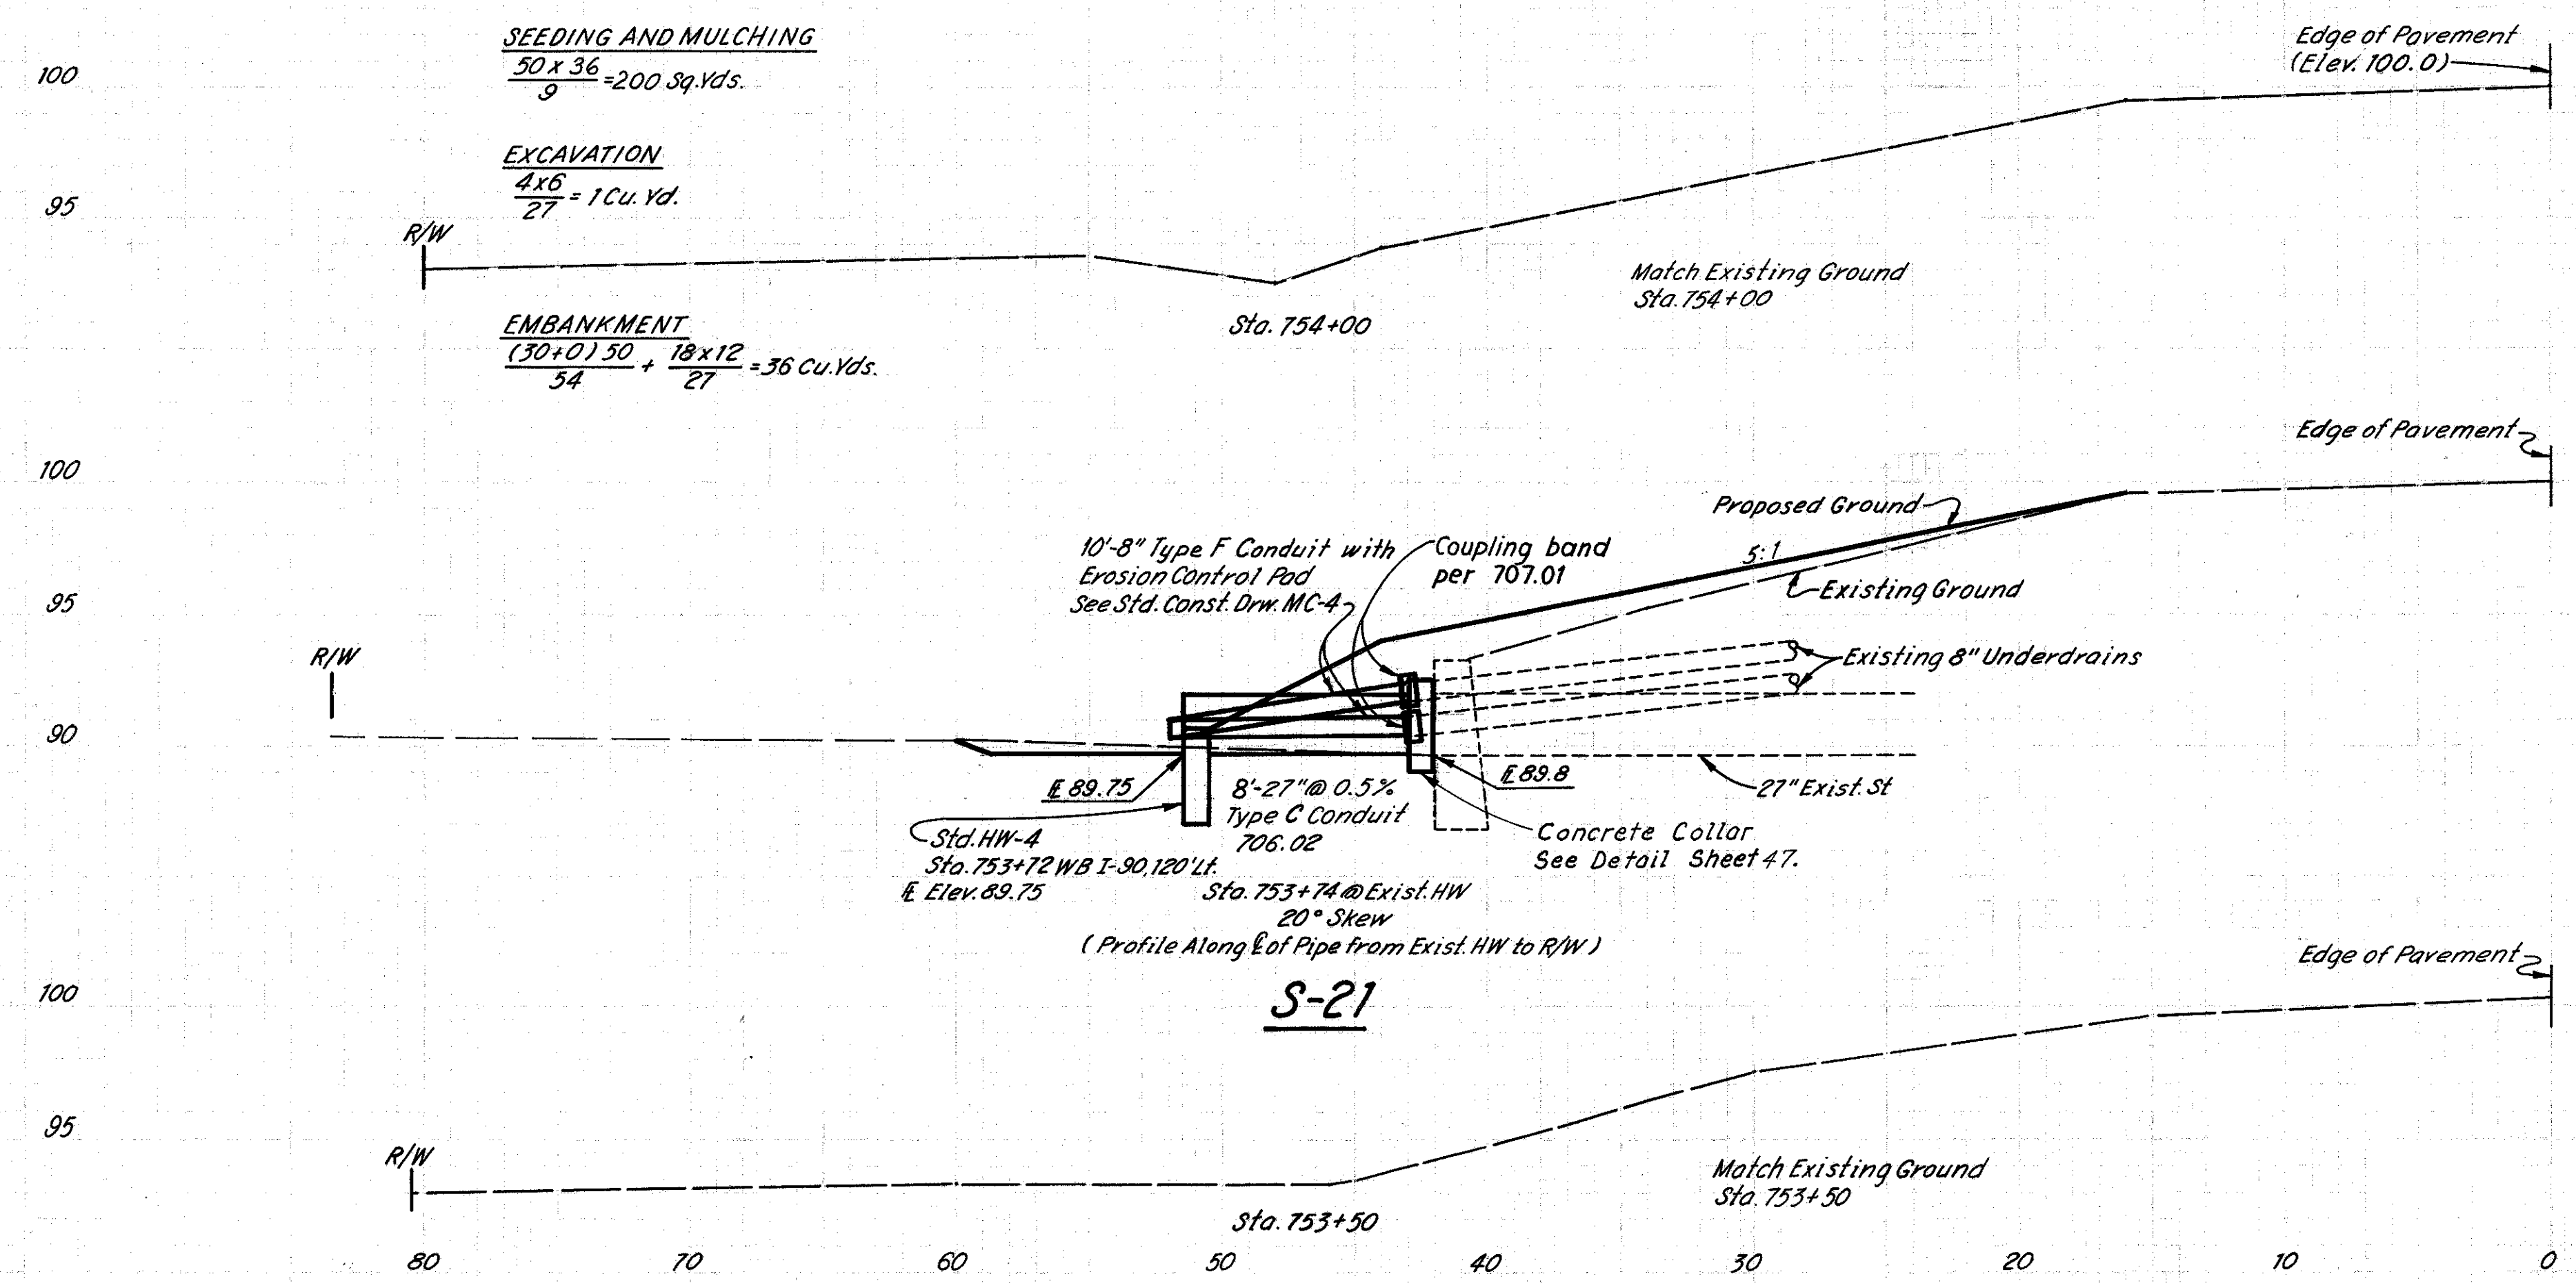

ESTIMATED QUANTITIES S-21

ITEM	DESCRIPTION	QUANTITY	UNIT
203	Excavation	1	Cu. Yds.
203	Embankment	36	Cu. Yds.
602	Concrete Masonry	0.49	Cu. Yds.
603	27" Conduit Type C 706.02 As per plan	8	Lin. Ft.
603	8" Conduit Type F	20	Lin. Ft.
659	Seeding and Mulching	200	Sq. Yds.

(For Plan View See Sheet No. 24)

3-31-72
4-5-72
4-12-72
5-23-72
H.C.
L.J.D.
D.S.M.