


LAKE COUNTY
LAK.-90-3.56

QUANTITIES
Made: RAE 4-21-72
Ckd: LJD 5-9-72

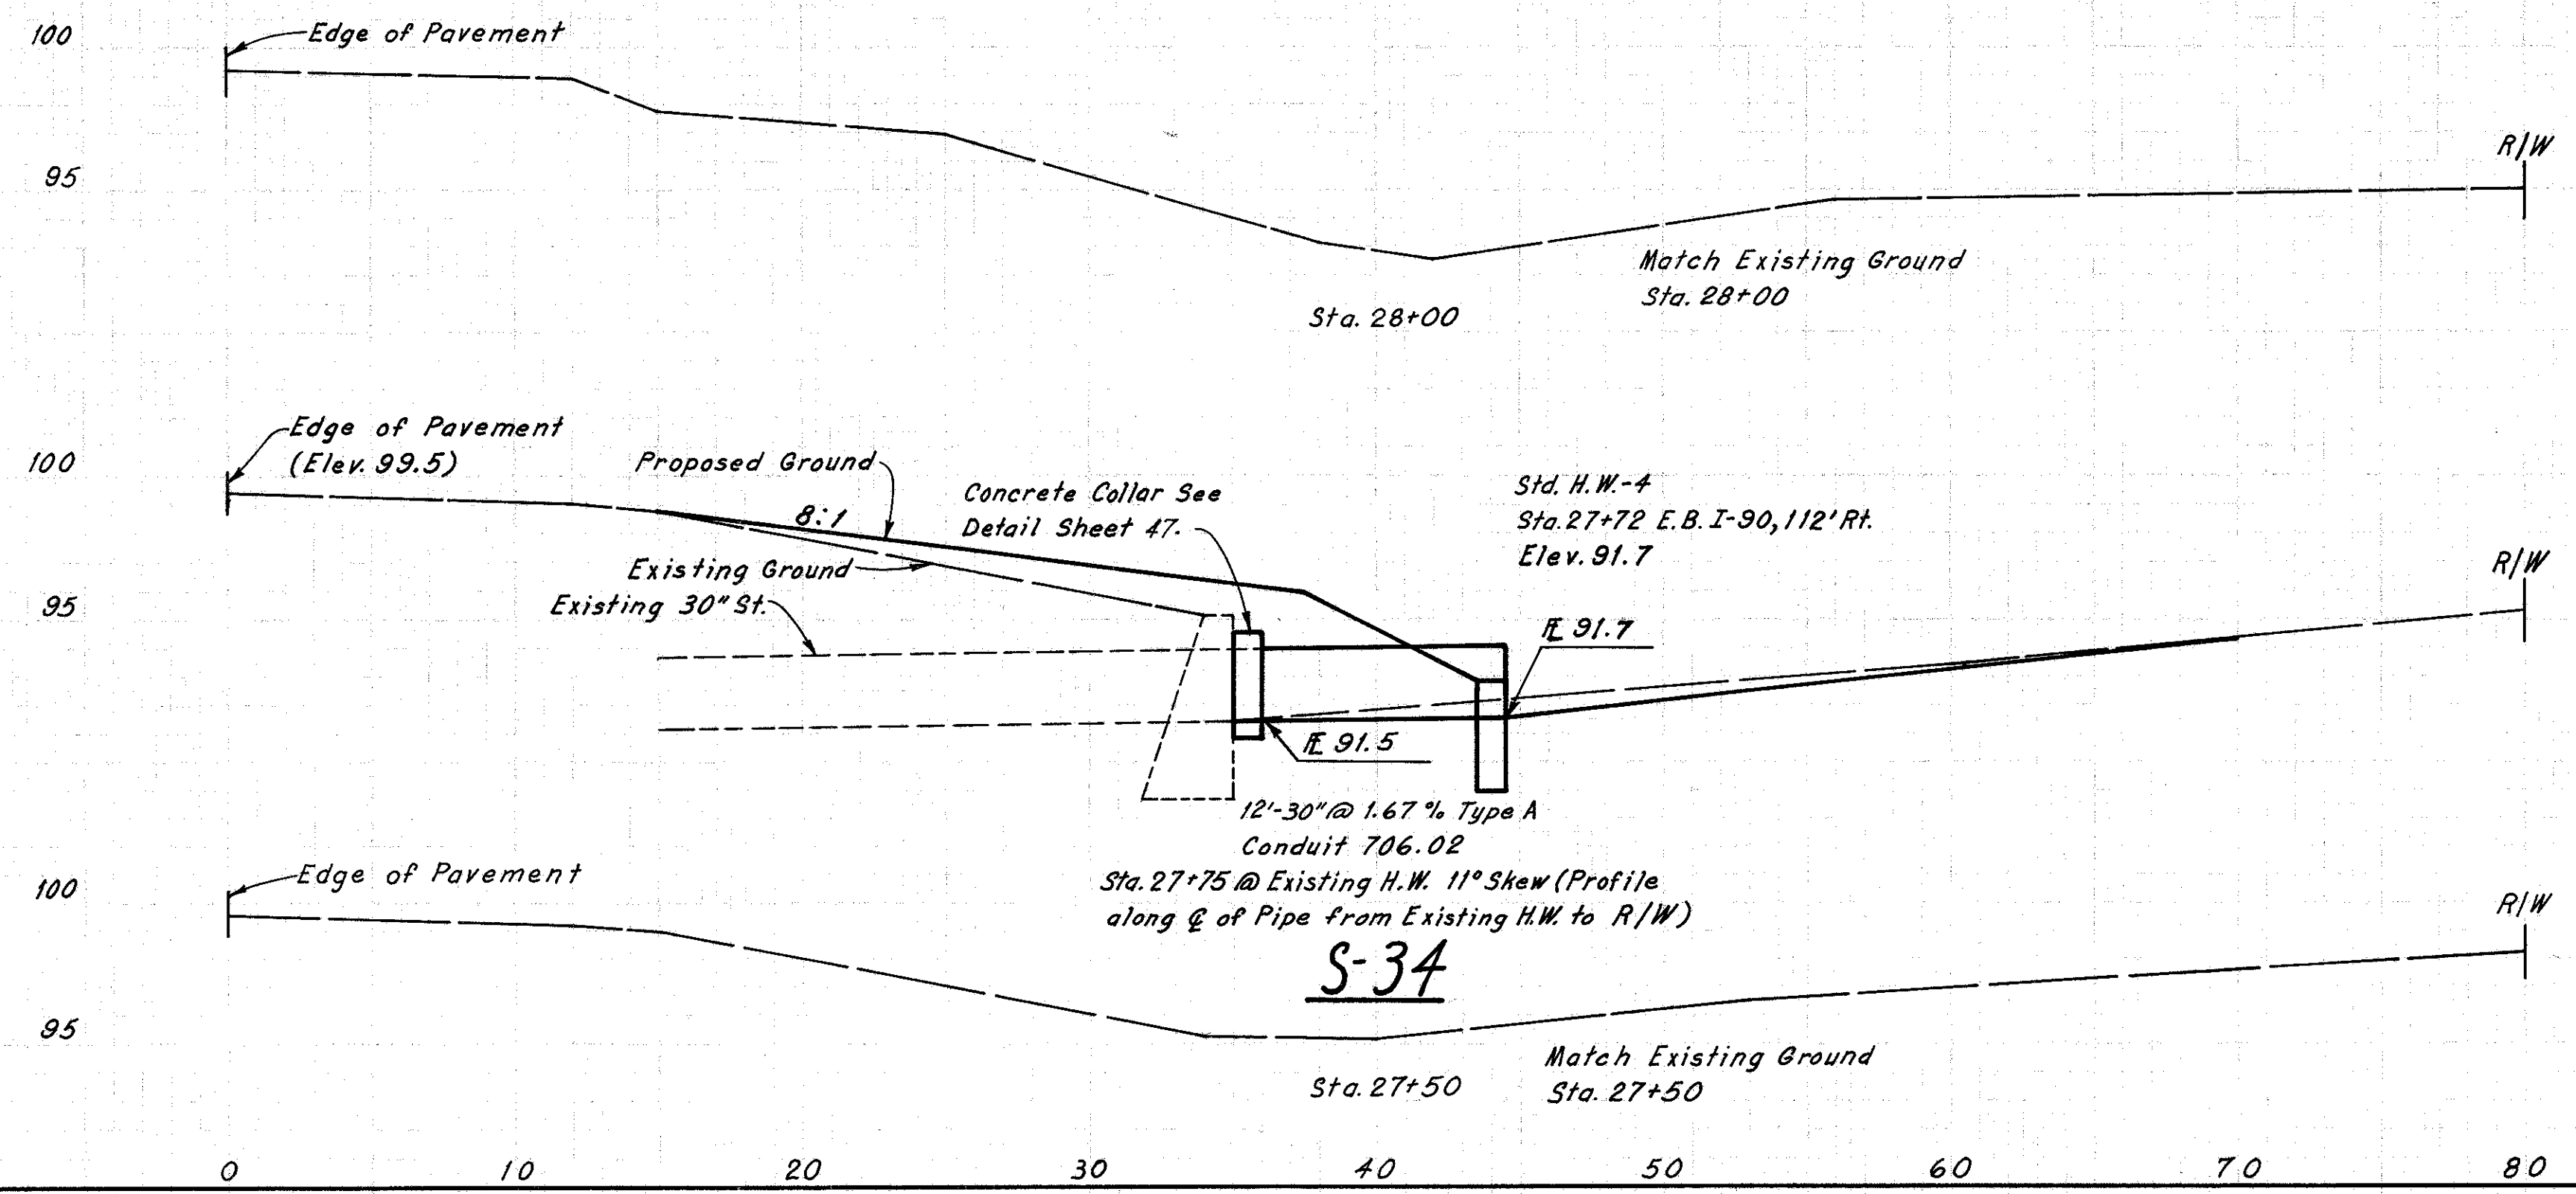

SEEDING & MULCHING
 $\frac{31 \times 50}{9} = 172 \text{ Sq. Yds.}$


EXCAVATION
 $\frac{13 \times 6}{27} = 3 \text{ Cu. Yds.}$

EMBANKMENT
 $\frac{(32.5+0) \times 50}{54} + \frac{21 \times 13}{27} = 39 \text{ Cu. Yds.}$

ESTIMATED QUANTITIES S-34

ITEM	DESCRIPTION	QUANTITY	UNIT
203	Excavation	3	Cu. Yds.
203	Embankment	39	Cu. Yds.
602	Concrete Masonry	0.56	Cu. Yds.
603	30" Conduit Type A	12	Lin. Ft.
659	Seeding & Mulching	172	Sq. Yds.

(For Plan View See Sheet No. 29)

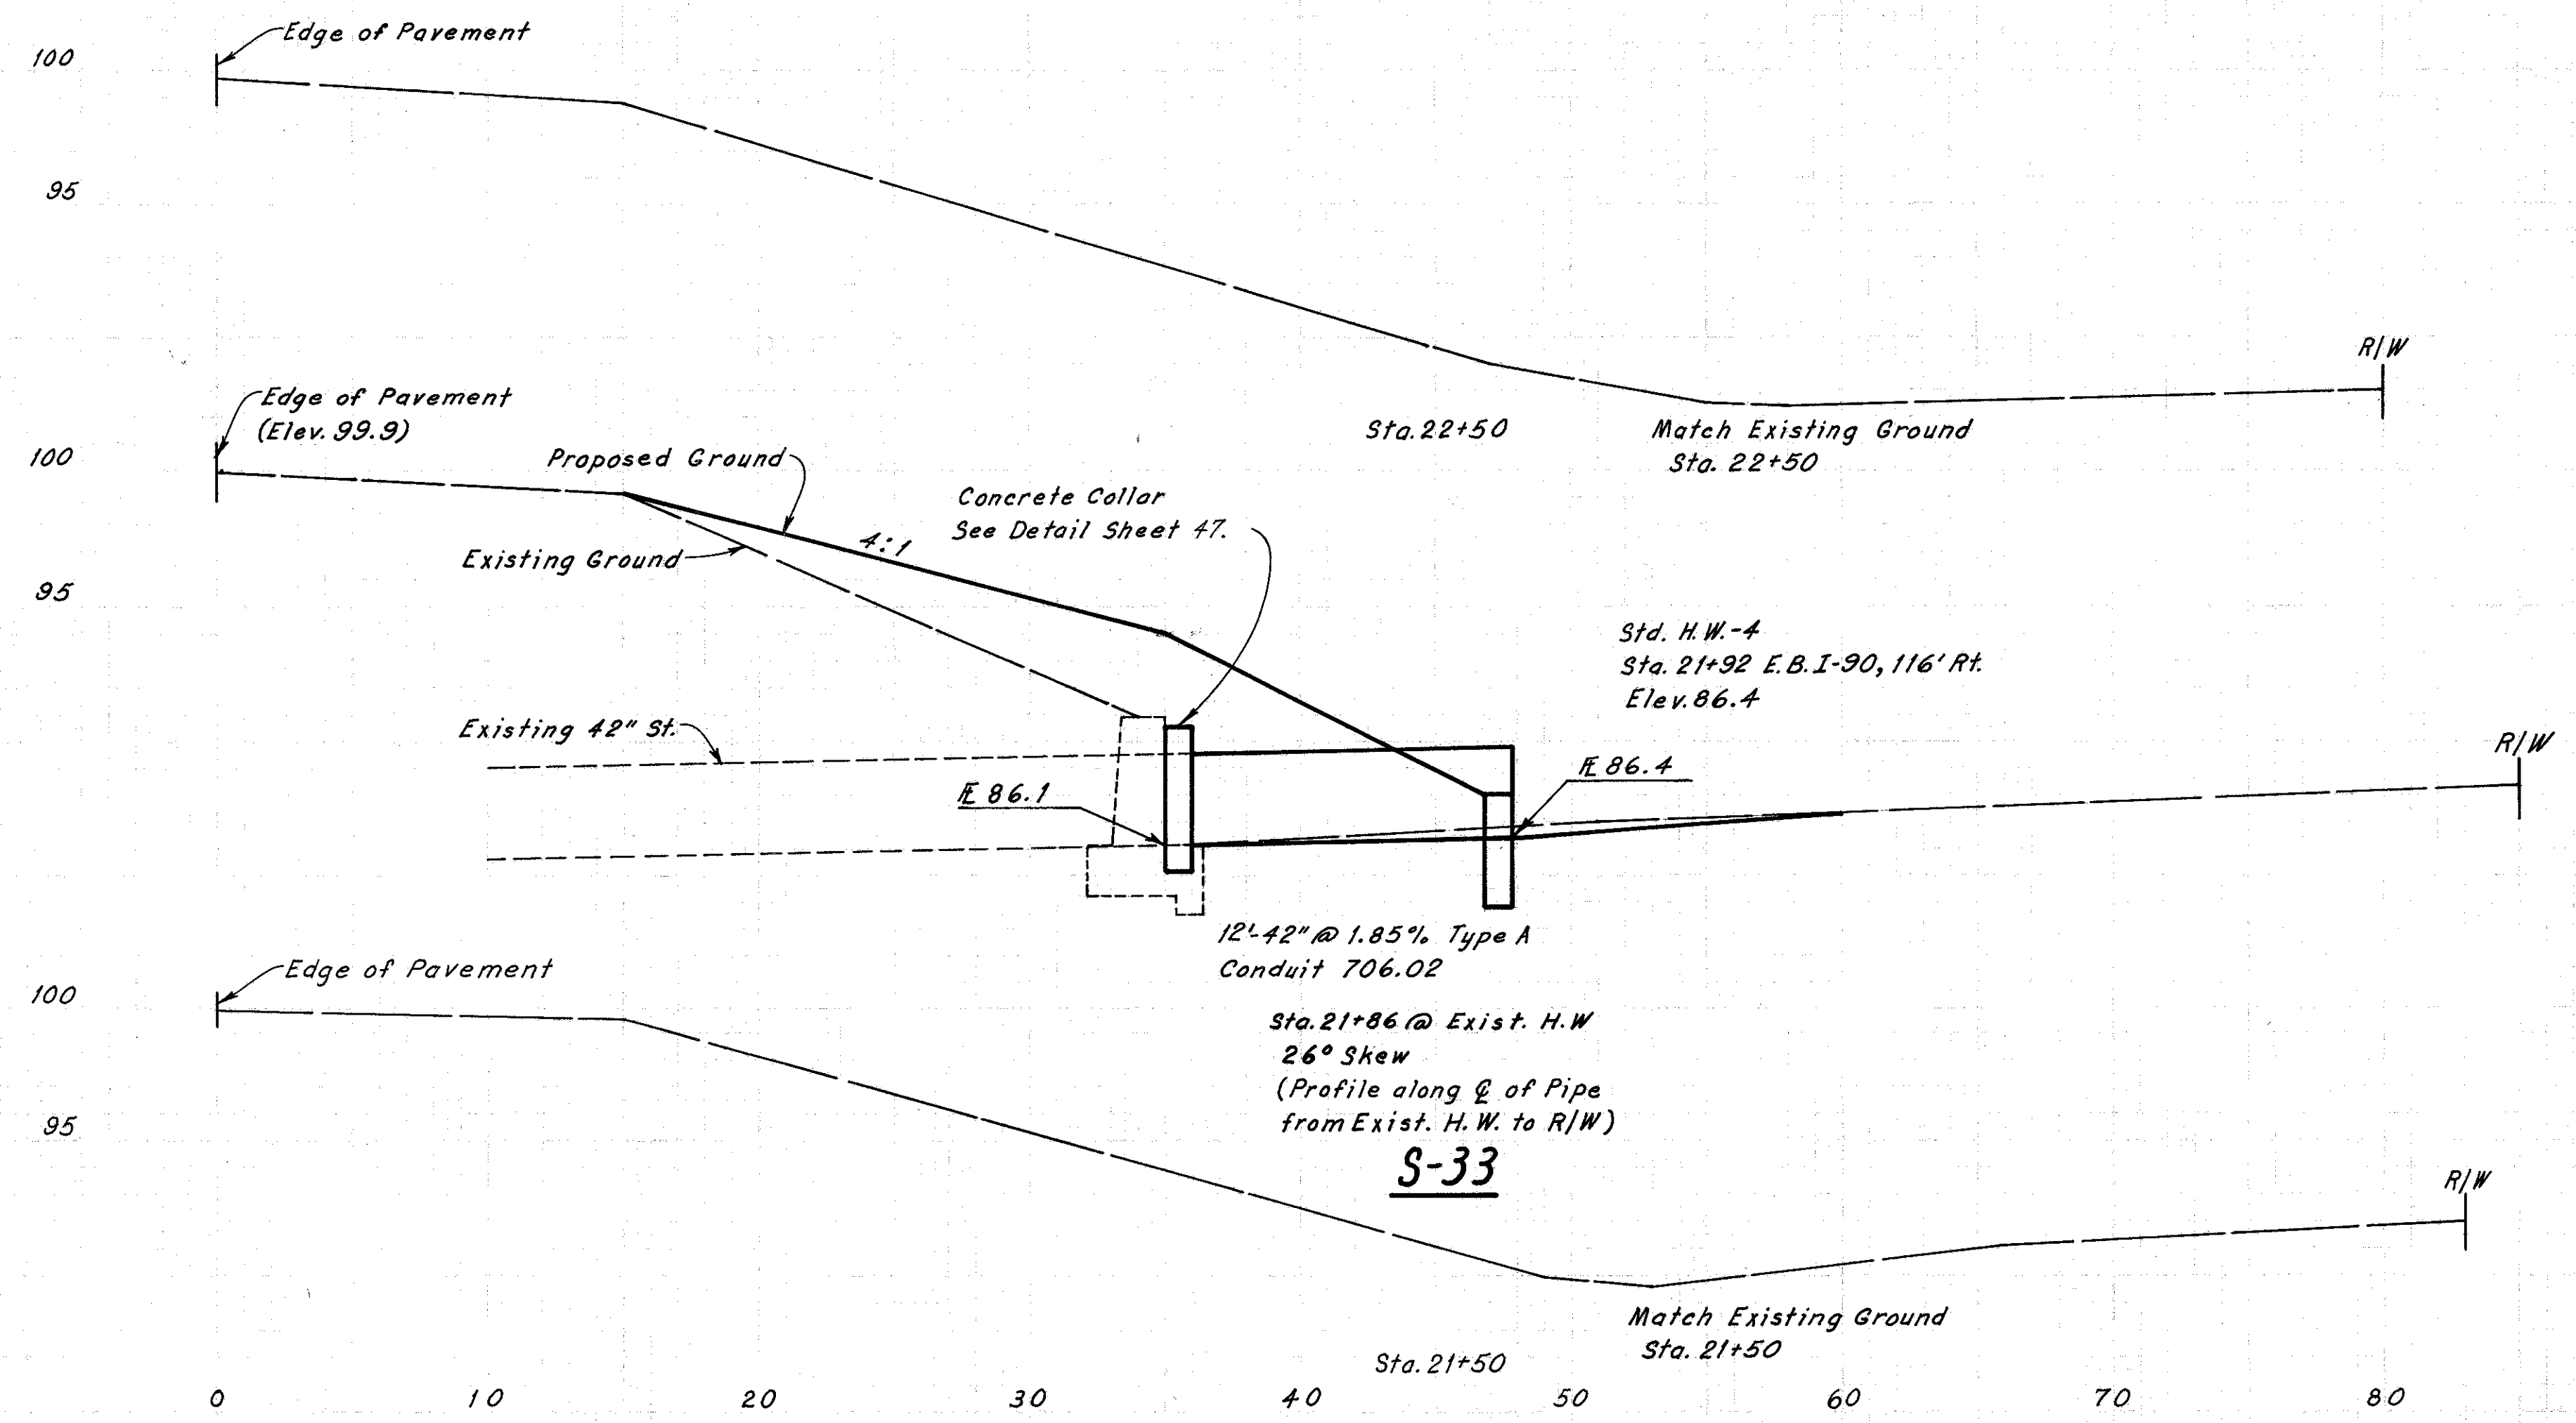

SEEDING & MULCHING
 $\frac{35 \times 100}{9} = 389 \text{ Sq. Yds.}$

EXCAVATION
 $\frac{8 \times 7}{27} = 2 \text{ Cu. Yds.}$

EMBANKMENT
 $\frac{(73+0) \times 100}{54} + \frac{20 \times 9}{27} = 141 \text{ Cu. Yds.}$

ESTIMATED QUANTITIES S-33

ITEM	DESCRIPTION	QUANTITY	UNIT
203	Excavation	2	Cu. Yds.
203	Embankment	141	Cu. Yds.
602	Concrete Masonry	0.84	Cu. Yds.
603	42" Conduit Type A	12	Lin. Ft.
659	Seeding & Mulching	389	Sq. Yds.

(For Plan View See Sheet No. 29)

4-10-72
 E.P.H.
 RAE
 4-21-72
 RAE
 4-21-72
 LJD
 5-9-72