


LAKE COUNTY
LAK. - 90-3.56

QUANTITIES
Made: RAE 5-11-72
Ckd: DSM 5-30-72

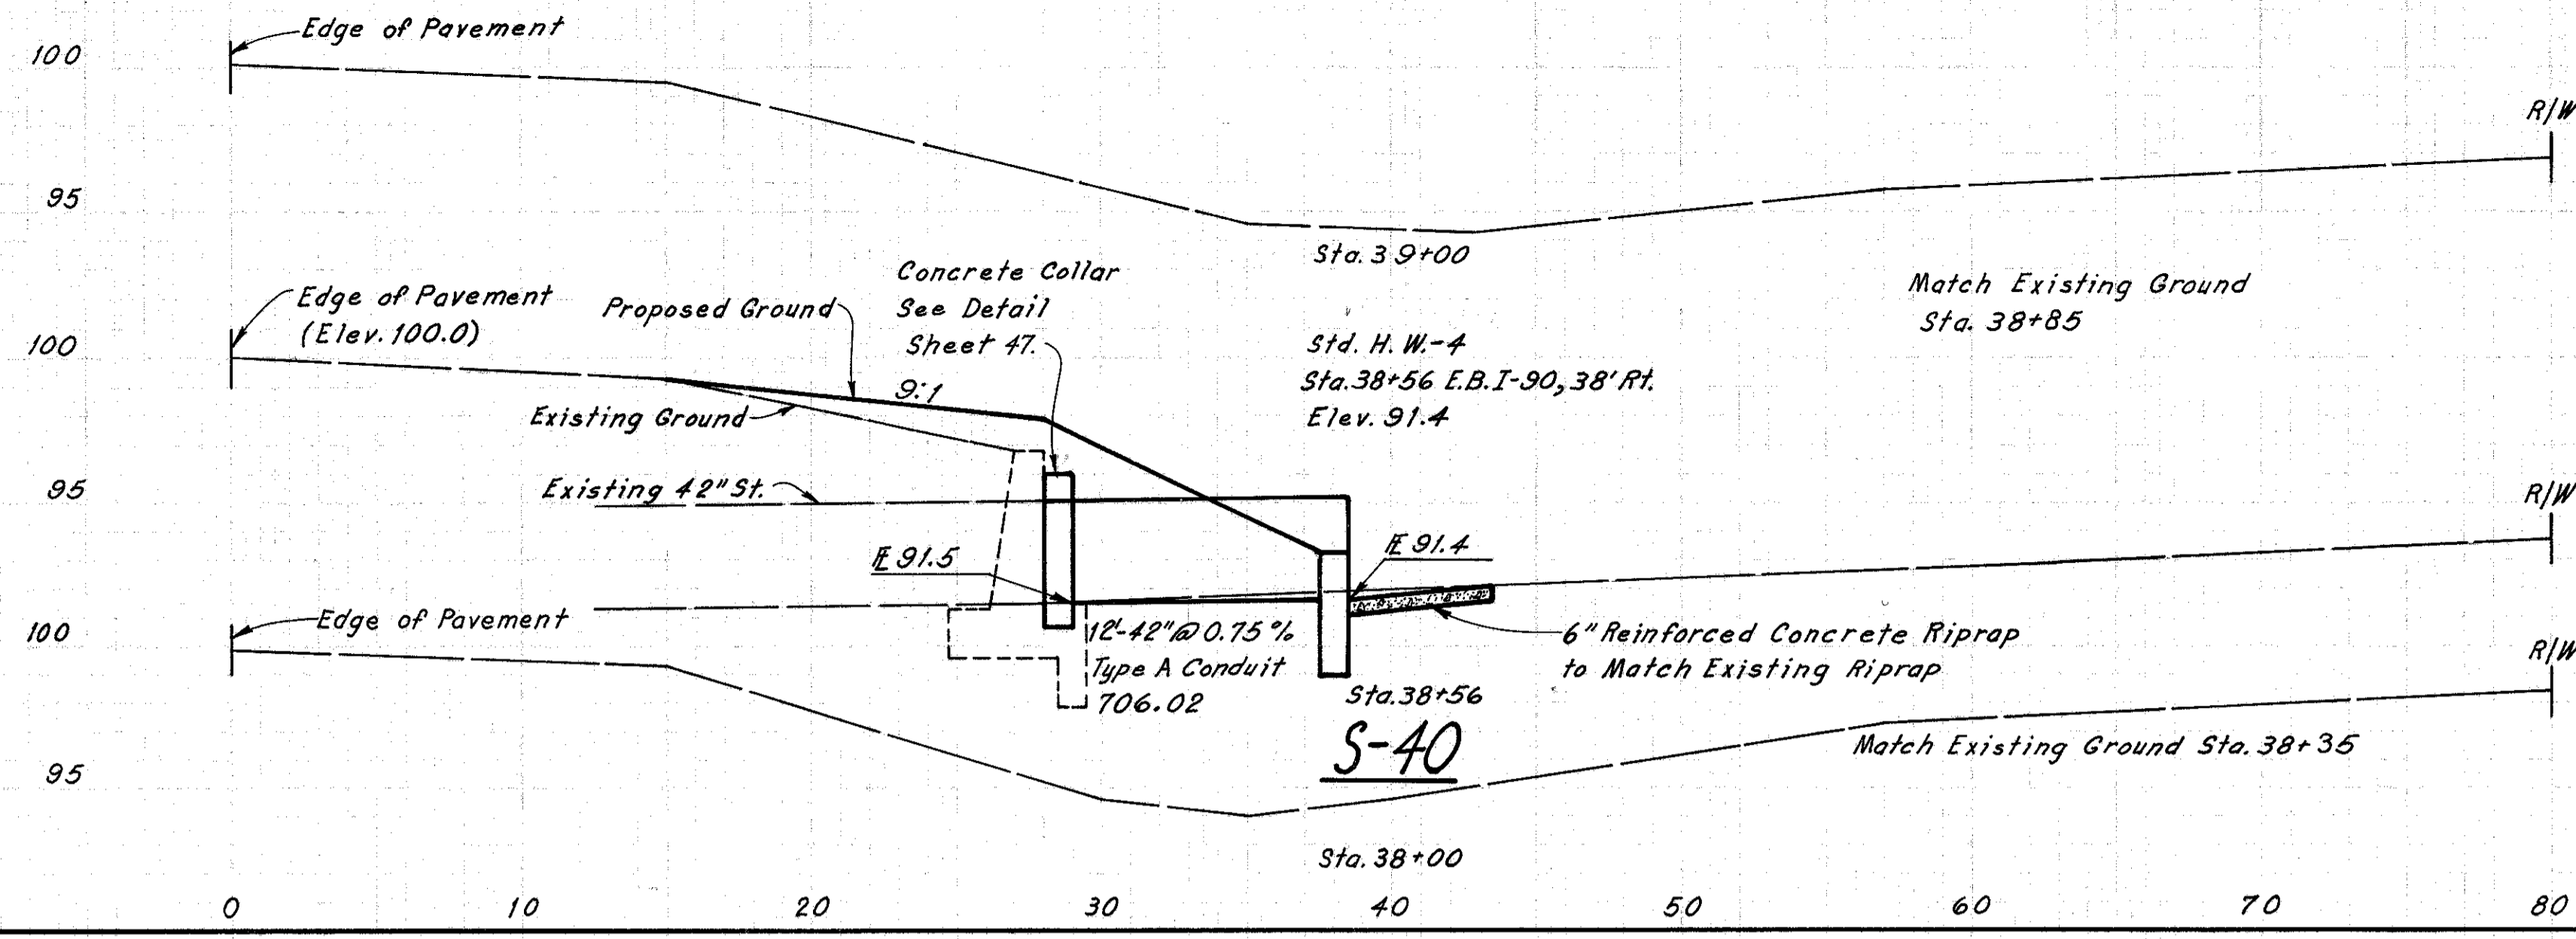

SEEDING & MULCHING
 $\frac{50 \times 20}{9} = 111 \text{ Sq. Yds.}$


EXCAVATION
 $\frac{1.3 \times 20}{27} = 1 \text{ Cu. Yd.}$

EMBANKMENT
 $\frac{18 \times 50}{54} + \frac{26 \times 8}{27} = 25 \text{ Cu. Yds.}$

ESTIMATED QUANTITIES S-40

ITEM	DESCRIPTION	QUANTITY	UNIT
202	Gutter Removed	4	Sq. Yds.
203	Excavation	1	Cu. Yd.
203	Embankment	25	Cu. Yds.
601	6" Reinf. Conc. Riprap	2	Sq. Yds.
602	Concrete Masonry	0.84	Cu. Yds.
603	42" Conduit Type A	12	Lin. Ft.
	706.02 As per plan		
659	Seeding & Mulching	111	Sq. Yds.

(For Plan View See Sheet No. 29)

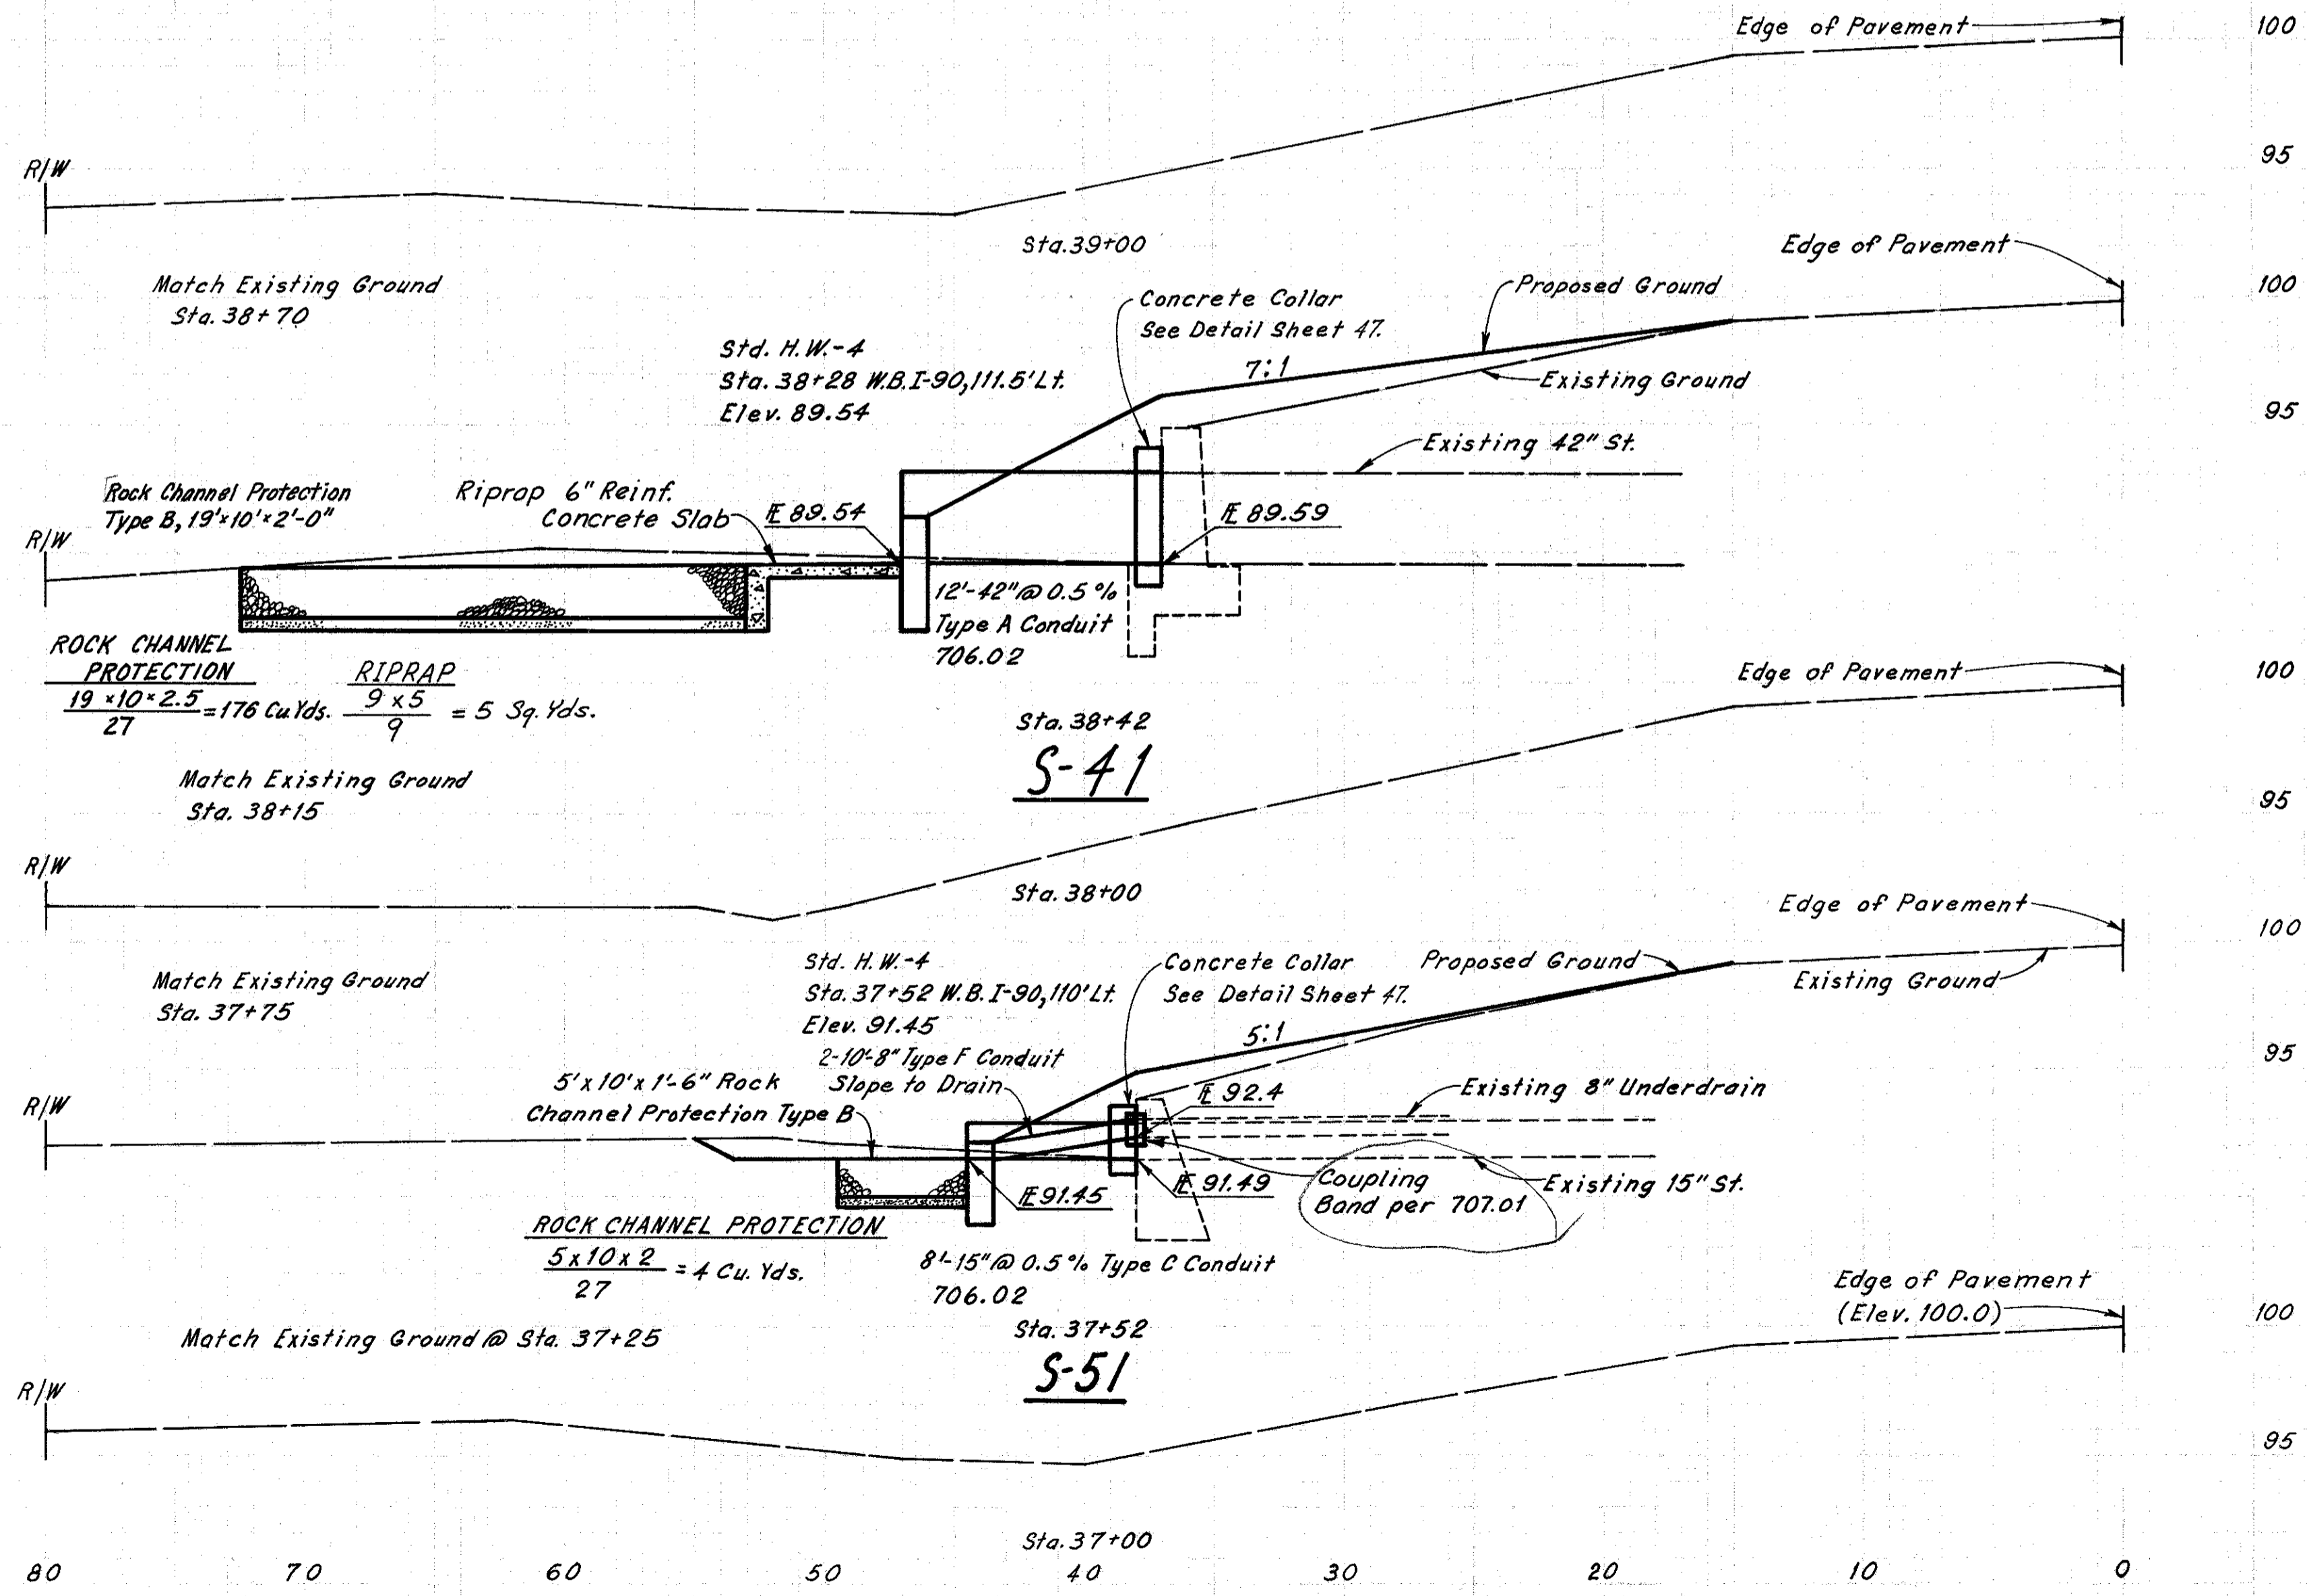

SEEDING & MULCHING
 $\frac{35 \times 55}{9} = 214 \text{ Sq. Yds.}$

EXCAVATION
 $\frac{9 \times 55}{27} = 18 \text{ Cu. Yds.}$

EMBANKMENT
 $\frac{22 \times 55}{54} + \frac{25 \times 7}{27} = 29 \text{ Cu. Yds.}$

ESTIMATED QUANTITIES S-41

ITEM	DESCRIPTION	QUANTITY	UNIT
203	Excavation	18	Cu. Yds.
203	Embankment	29	Cu. Yds.
601	Riprap 6" Reinf. Conc.	5	Sq. Yds.
601	Rock Channel Protect. Type B	176	Cu. Yds.
602	Concrete Masonry	0.84	Cu. Yds.
603	42" Conduit Type A	12	Lin. Ft.
	706.02 As per plan		
659	Seeding & Mulching	214	Sq. Yds.

(For Plan View See Sheet No. 29)

SEEDING & MULCHING
 $\frac{50 \times 42}{9} = 233 \text{ Sq. Yds.}$

EXCAVATION
 $\frac{(10+0) \times 50}{54} = 9 \text{ Cu. Yds.}$

EMBANKMENT
 $\frac{(12+0) \times 50}{54} + \frac{7 \times 2.5}{27} = 12 \text{ Cu. Yds.}$

ESTIMATED QUANTITIES S-51

ITEM	DESCRIPTION	QUANTITY	UNIT
203	Excavation	9	Cu. Yds.
203	Embankment	12	Cu. Yds.
601	Rock Channel Protection Type B	4	Cu. Yds.
602	Concrete Masonry	0.25	Cu. Yds.
603	15" Conduit Type C	8	Lin. Ft.
	706.02 As per plan		
603	8" Conduit Type F	20	Lin. Ft.
659	Seeding & Mulching	233	Sq. Yds.

(For Plan View See Sheet No. 29)

EBF 4-10-72
 RAE 5-10-72
 RAE 5-11-72
 DSM 5-30-72