


FOR PLAN, PROFILE & CROSS-SECTIONS
FRONTAGE RD. SEE SHEETS 199 TO 201


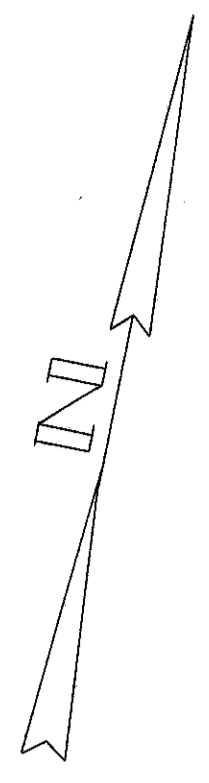


(D) DRAINAGE

REF. NO.	STATION	SIDE	I-4		I-5	L-10
			6" PIPE UNDERDRAIN		6" WYE	SODDING
			SHALLOW	DEEP	L.F.	EA.
1-D	107+00	117+00 LT.				
2-D	107+00	117+00 LT.	1000			
3-D	107+00	117+00 RT.	1000			
4-D	107+00	117+00 RT.		1000		
5-D	113+00	117+00 LT.				444

(R) ROADWAY

REF. NO.	STATION	SIDE	I-15		L-6
			GUARD RAIL, STEEL BEAM STD TYPE (DEEP)		ROAD-SIDE CLEANUP
			L.F.	UNITS	
1-R	107+00	108+00	RT.	100	
2-R	107+00	112+55	CL		70

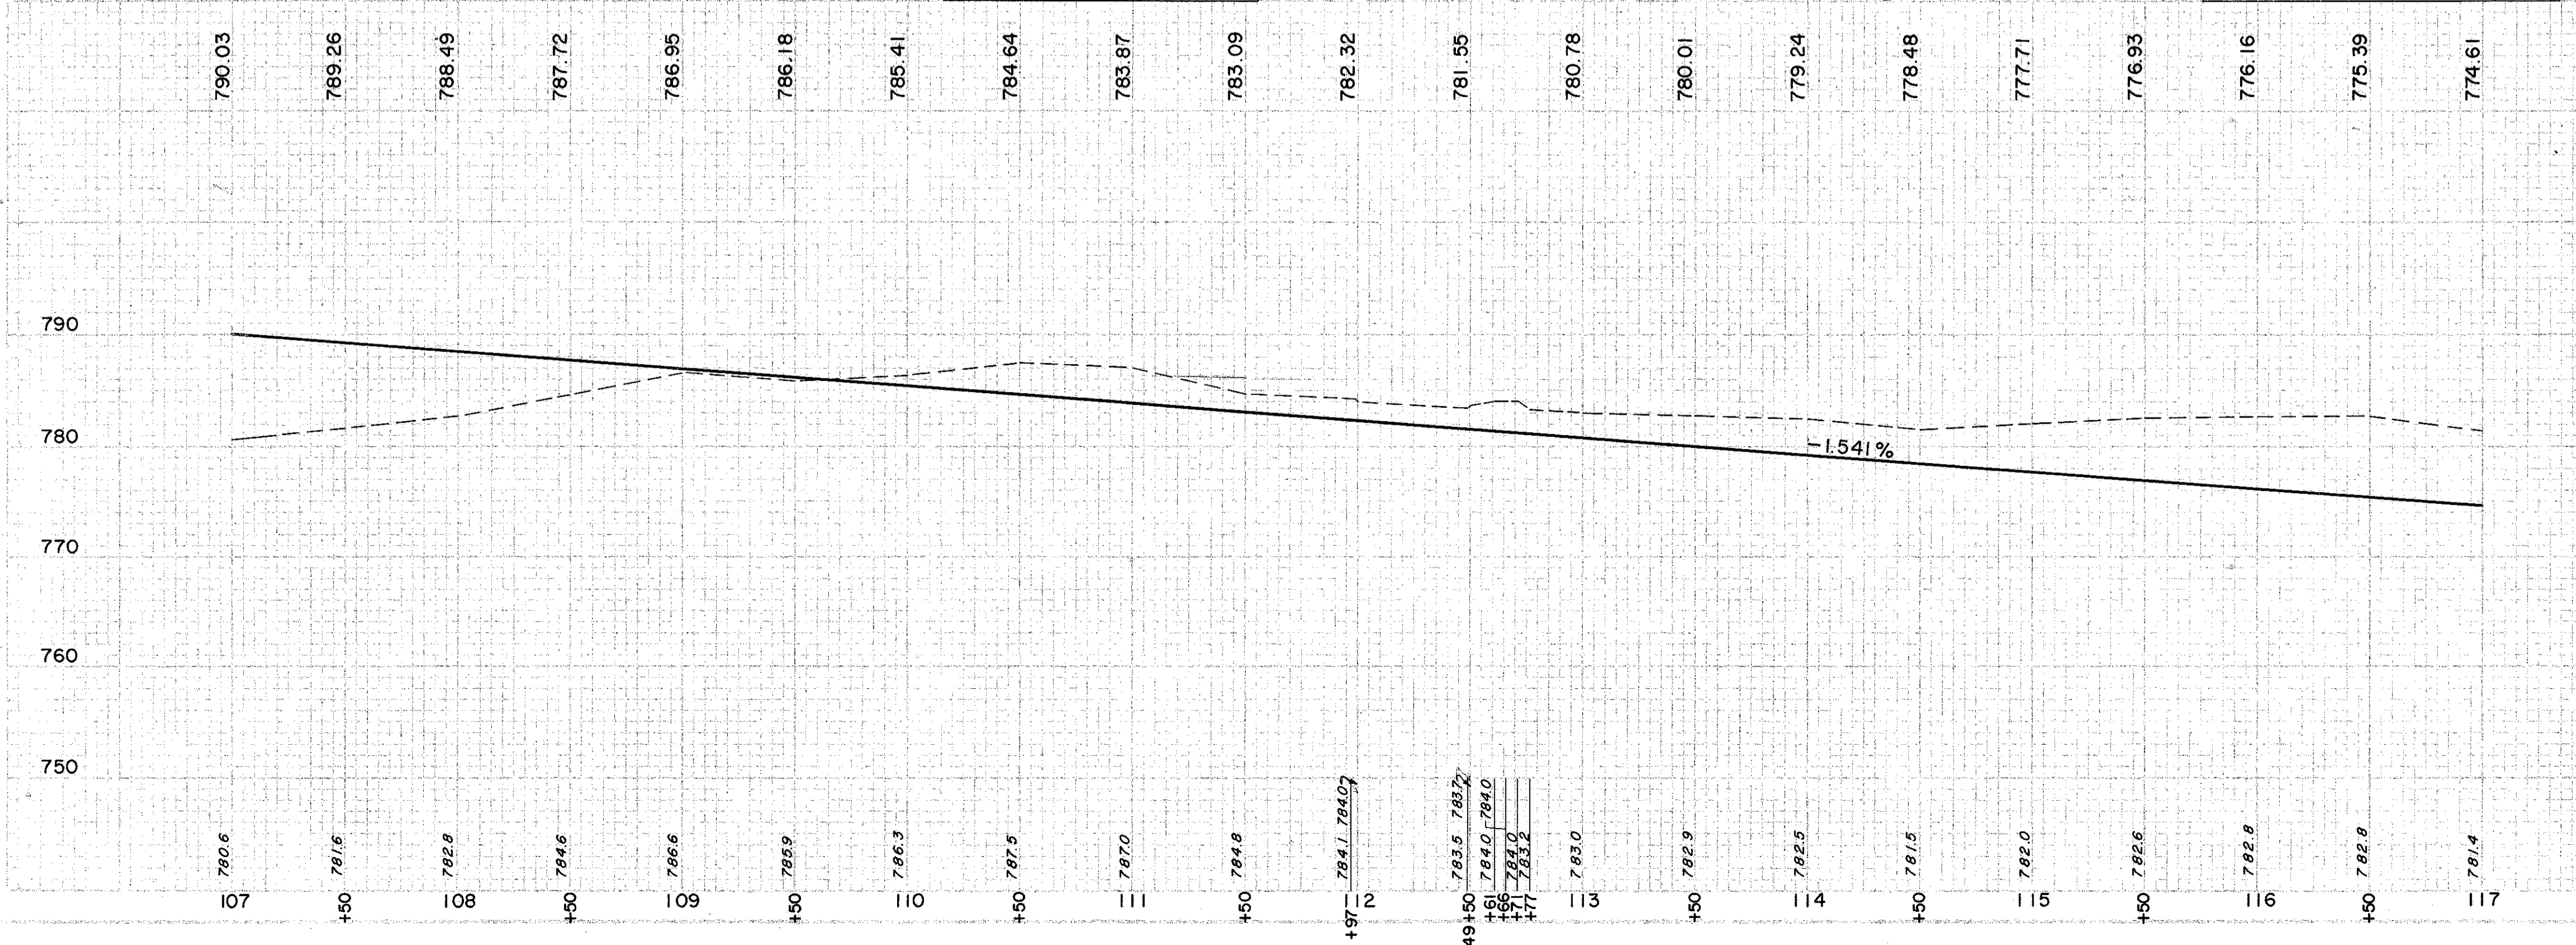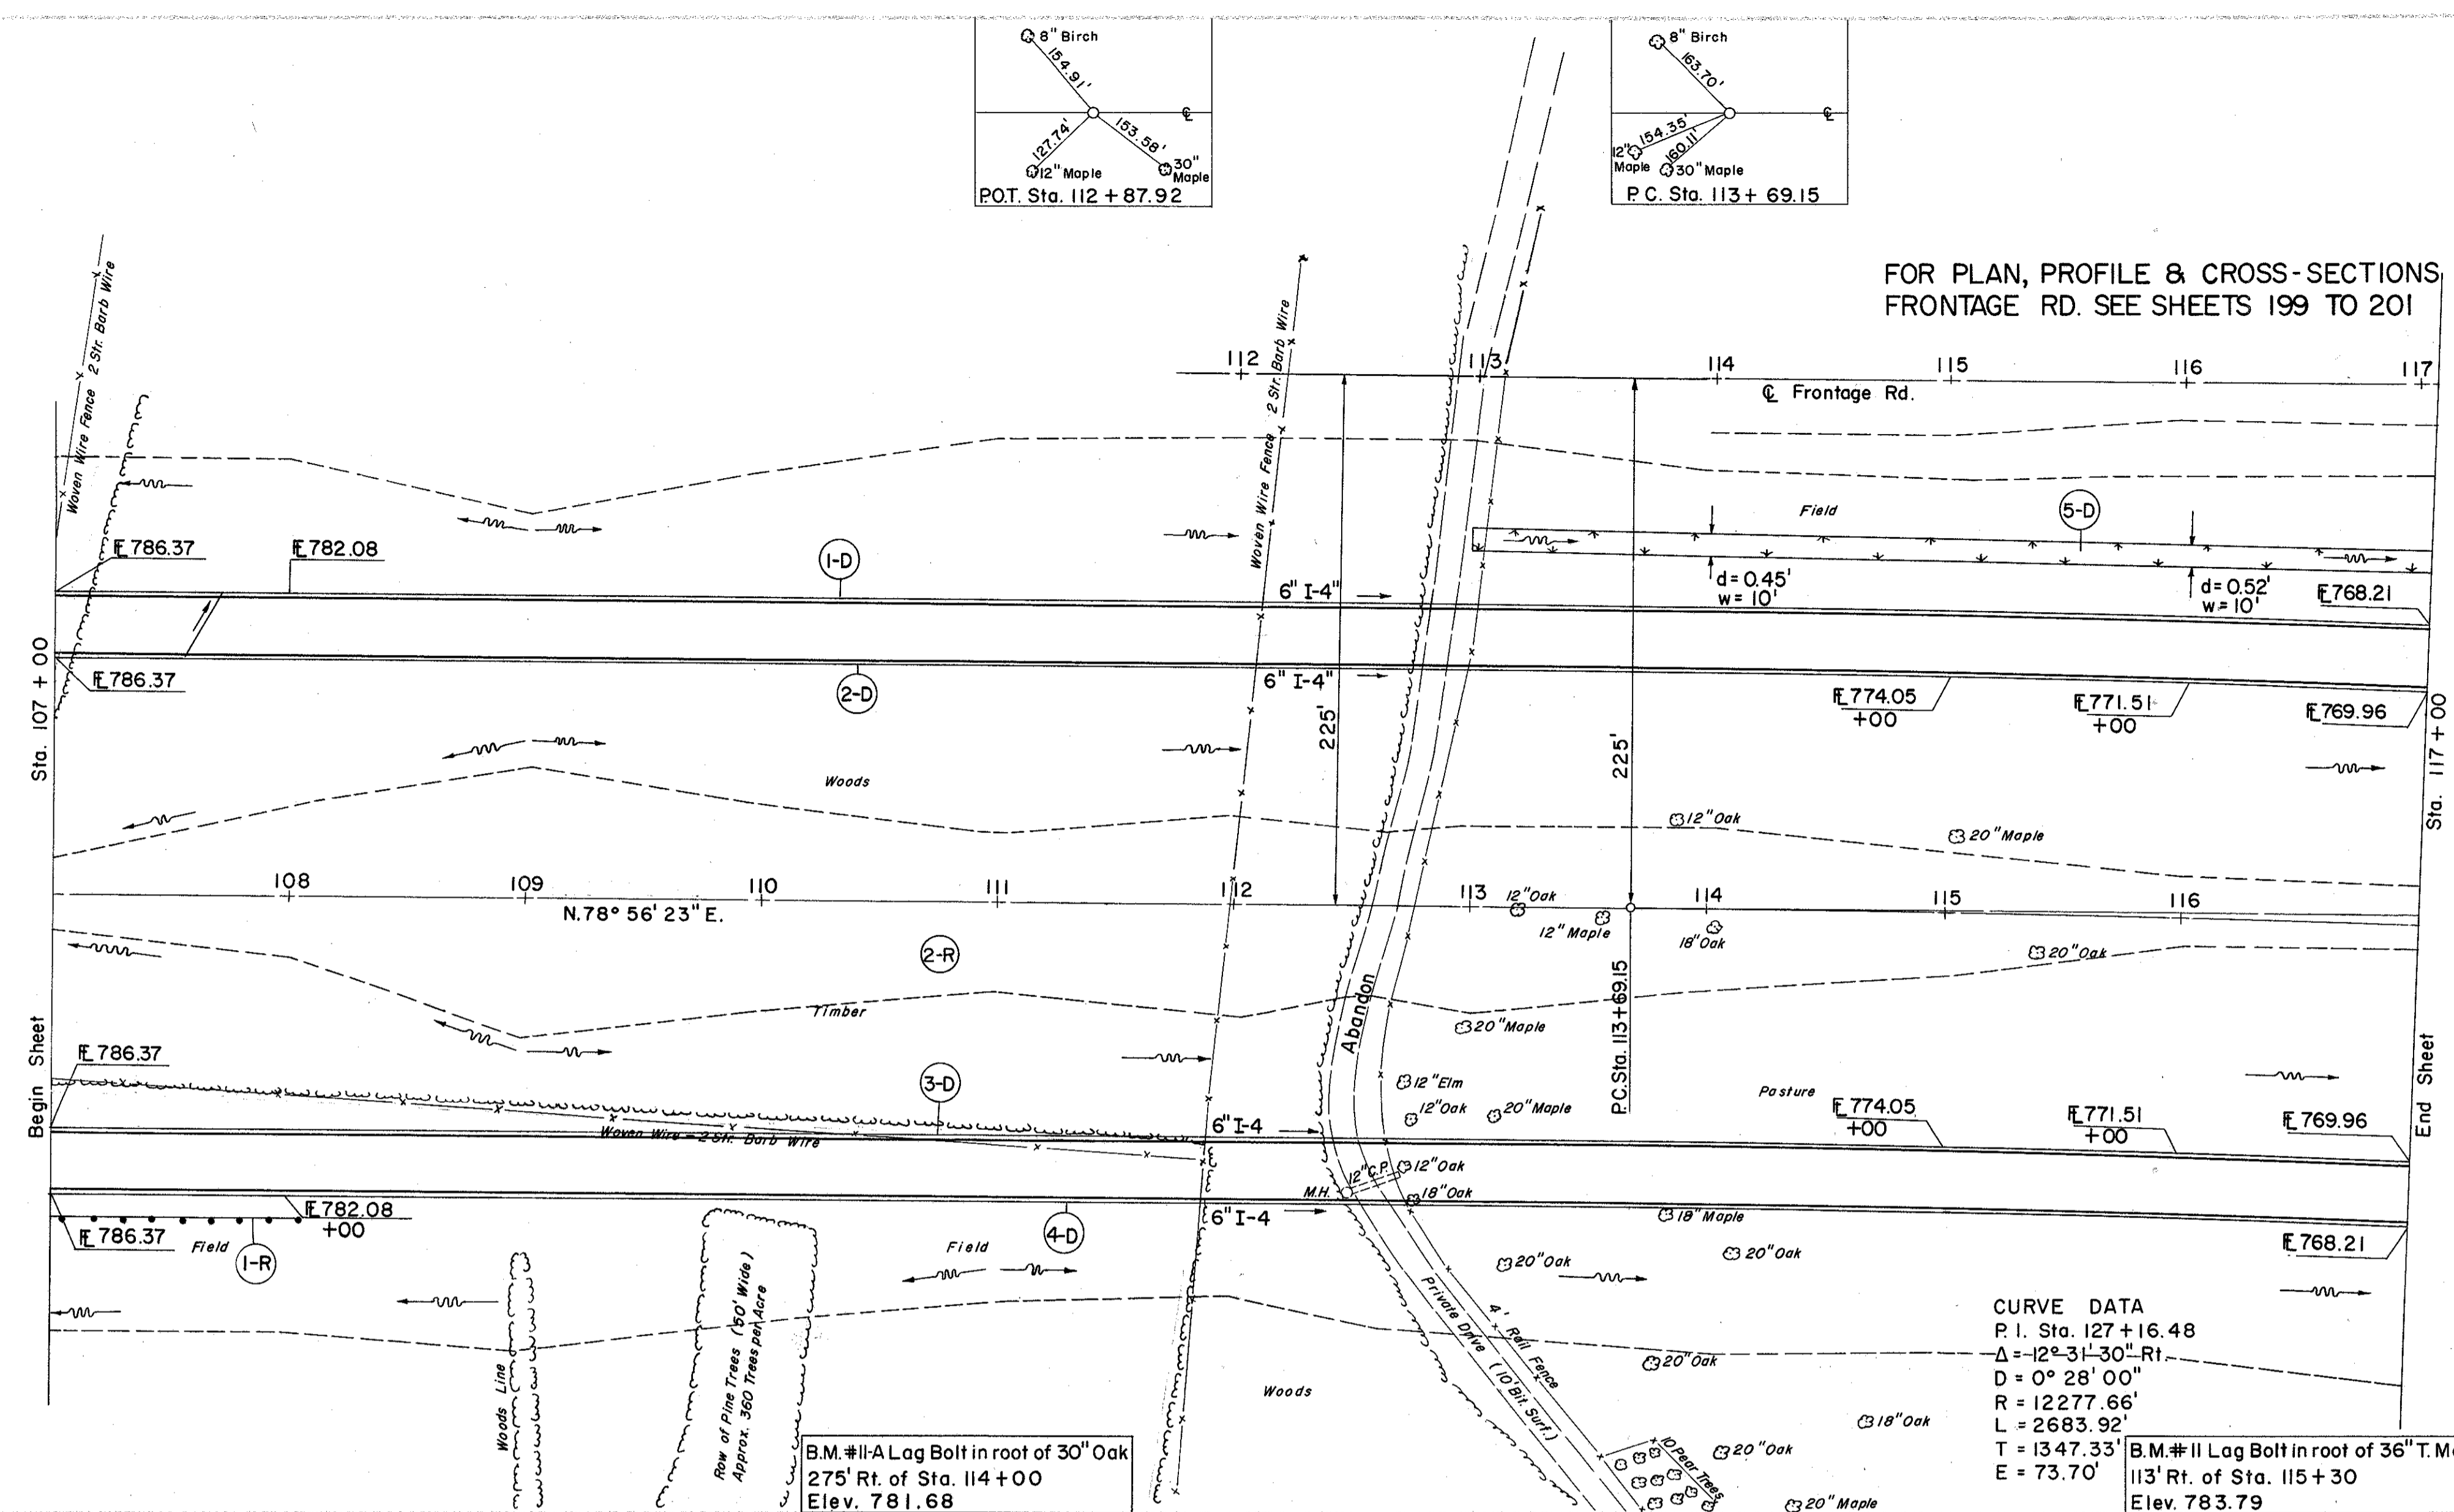

EXCAVATION	= 36,902 C.Y.
EMBANKMENT	= 7,112 C.Y.
EMBANKMENT @ 18%	= 8,392 C.Y.