


NOTE : SEE SHT. 4 FOR BEGIN AND END WORK STATIONS FOR IR-90.

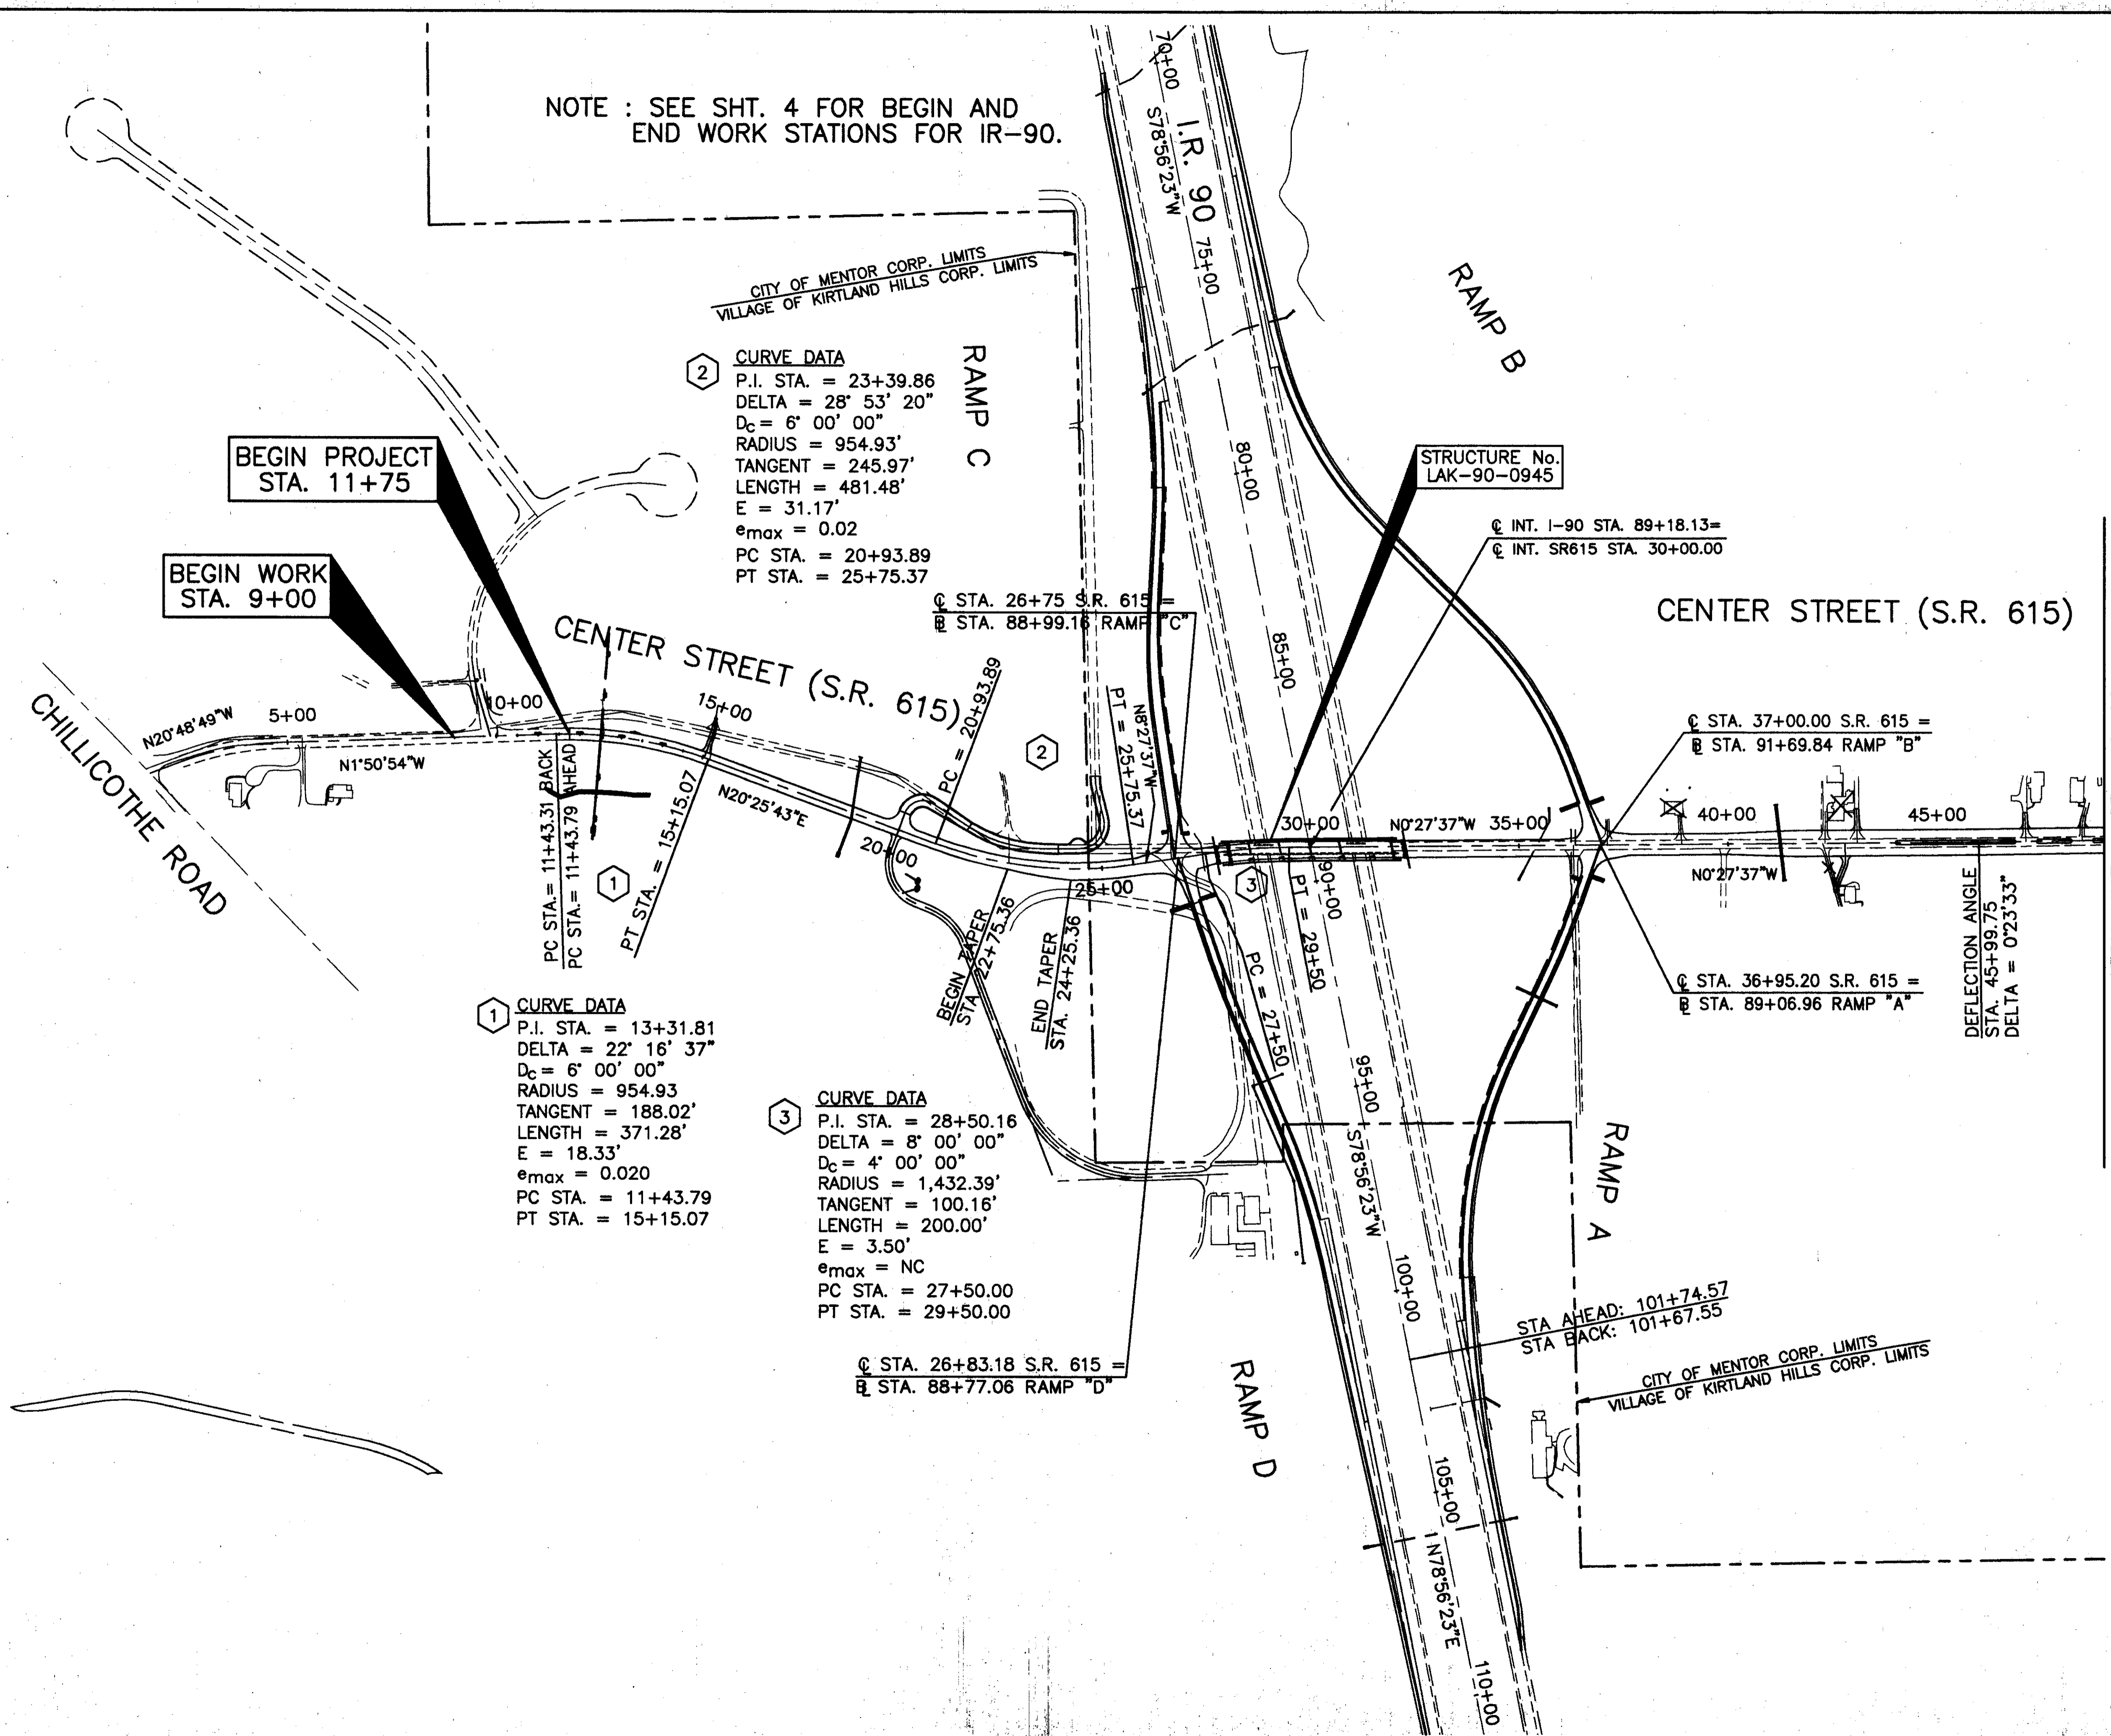

BEGIN PROJECT STA. 11+75

BEGIN WORK STA. 9+00

CITY OF MENTOR CORP. LIMITS
VILLAGE OF KIRTLAND HILLS CORP. LIMITS

2 CURVE DATA
P.I. STA. = 23+39.86
DELTA = 28° 53' 20"
D_c = 6' 00' 00"
RADIUS = 954.93'
TANGENT = 245.97'
LENGTH = 481.48'
E = 31.17'
e_{max} = 0.02
PC STA. = 20+93.89
PT STA. = 25+75.37

1 CURVE DATA
P.I. STA. = 13+31.81
DELTA = 22° 16' 37"
D_c = 6' 00' 00"
RADIUS = 954.93'
TANGENT = 188.02'
LENGTH = 371.28'
E = 18.33'
e_{max} = 0.020
PC STA. = 11+43.79
PT STA. = 15+15.07

3 CURVE DATA
P.I. STA. = 28+50.16
DELTA = 8° 00' 00"
D_c = 4' 00' 00"
RADIUS = 1,432.39'
TANGENT = 100.16'
LENGTH = 200.00'
E = 3.50'
e_{max} = NC
PC STA. = 27+50.00
PT STA. = 29+50.00

STRUCTURE No. LAK-90-0945

☉ INT. I-90 STA. 89+18.13 =
☉ INT. SR615 STA. 30+00.00

CENTER STREET (S.R. 615)

☉ STA. 37+00.00 S.R. 615 =
☉ STA. 91+69.84 RAMP "B"


☉ STA. 36+95.20 S.R. 615 =
☉ STA. 89+06.96 RAMP "A"

DEFLECTION ANGLE
STA. 45+99.75
DELTA = 0°23'33"

MATCH LINE - STA. 49+00

STATION	EACH
PT STA. 15+15.07	1
PC STA. 20+93.89	1
PT STA. 25+75.37	1
PC STA. 27+50.00	1
OL STA. 35+00.00	1
PI STA. 45+99.75	1
TOTALS	6

604
MONUMENT ASSEMBLY

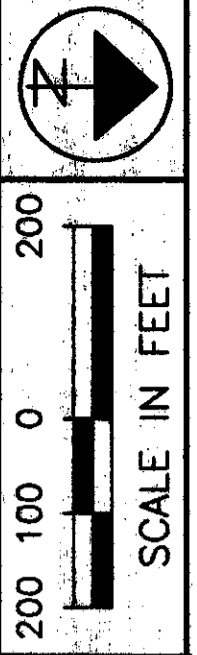

SCHEMATIC PLAN - S.R. 615 (CENTER STREET)
STA. 3+50 TO STA. 49+00

LAK-IR90/SR615-9.26/1.51

