

PROPOSED PAVEMENT TO BE CONSTRUCTED PRIOR TO THIS PROJECT UNDER THE LAK-615-1.26 (PID 12790) PROJECT IN THE VILLAGE OF KIRTLAND HILLS.

A TEMPORARY CONNECTION SHALL BE PROVIDED UNDER THE LAK-615-1.26 PROJECT FOR THE TRANSITION BETWEEN THE EXISTING S.R. 615 PAVEMENT AND THE PROPOSED PAVEMENT CONSTRUCTED UNDER THE LAK-615-1.26 PROJECT.

MAINTAIN LOCAL NORTH & SOUTH TRAFFIC ON EXISTING ROADWAY


ROAD CLOSED TO THRU TRAFFIC

PART A  
CONSTRUCT PROPOSED PAVEMENT  
& NEW DRIVEWAY CONNECTIONS

**PHASE I**

(A) CONSTRUCT NEW PAVEMENT STA. 11+75 TO STA. 25+00. MAINTAIN TWO WAY TRAFFIC ON EXISTING S.R. 615 PAVEMENT FROM KINGSWOOD DRIVE NORTH TO I-90.

(B) CONSTRUCT TEMPORARY PAVEMENT STA. 43+50 TO STA. 77+00±. ESTABLISH ONE WAY SOUTHBOUND TRAFFIC ONLY FROM STA. 43+50 TO S.R. 84. CONSTRUCT NEW NORTHBOUND S.R. 615 PAVEMENT FROM STA. 43+50 TO STA. 77+00±. NORTHBOUND TRAFFIC FOR S.R. 615 SHALL UTILIZE DETOUR AS SHOWN ON SHEET 24.

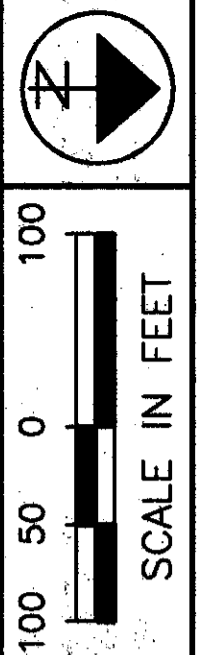

S.R. 615 (CENTER STREET)  
MAINTENANCE OF TRAFFIC - PHASE I

LAK-IR90/SR615-9.26/1.51